



Measuring and monitoring relays

CM and C5xx range

Content

Benefits and advantages	58
Monitoring features and application ranges	60
Approvals and marks	62
Current and voltage monitors, single-phase	63
Ordering details	64
Technical data	70
Three-phase monitors	75
Conversion table	76
Ordering details	78
Technical data	86
Insulation monitors for ungrounded supply mains	95
Ordering details	97
Technical data	102
Motor load monitors	105
Ordering details	107
Technical data	108
Thermistor motor protection relays	109
Ordering details	111
Technical data	115
Temperature monitors	117
Ordering details	118
Technical data	122
Liquid level monitors and controls	123
Ordering details	124
Technical data	130
Contact protection relays and sensor interface relay	133
Ordering details	134
Technical data	136
Cycle monitor with watchdog function	139
Ordering details	140
Technical data	141
General technical data, Accessories and Current transformers	143
Technical diagrams	144
Dimensional drawings	145
Accessories	146
Current transformers	147

Measuring and monitoring relays

CM range

Benefits and advantages

2



2CDC 255 078 F0007

CM-E range: Economic

1SVR 550 851 F9400



Combination screws

Easy tightening and release of the connecting screws with pozidrive, pan- or crosshead screwdriver.



1SVC 110 000 F0506



2CDC 253 011 F0003

Safety

The "real distance" is hidden. The clearance and the creepage distances of our products exceed international standards and substantially increase the safety of our products.

- Only 22.5 mm wide enclosure
- Output contacts: 1 c/o contact or 1 n/o contact
- One supply voltage range
- One monitoring function
- Cost-efficient solution for OEM applications
- Preset monitoring ranges



Measuring and monitoring relays

CM range

Benefits and advantages

CM-S range: Universal and multifunctional



- Only 22.5 mm wide enclosure
- Output contacts: 1 or 2 c/o contacts
- One supply voltage range or supplied by measuring circuit
- Setting and operation via front-face operating controls
- Adjustment of threshold values and switching hysteresis via direct reading scale
- Integrated and snap-fitted front-face marker
- Sealable transparent cover (accessory)



2CDC 253 089 F0004

Direct reading scales

Direct adjustment of the threshold values of measuring and monitoring relays without any additional calculation provides accurate time delay adjustment.


LEDs for status indication

All actual operational states are indicated by front-face LEDs, thus simplifying commissioning and troubleshooting.



2CDC 253 014 F0003

Double-chamber cage connection terminals



2CDC 253 010 F0003

Double-chamber cage connection terminals provide connection of wires up to 2 x 2.5 mm² (2 x 14 AWG), rigid or fine-strand, with or without wire end ferrules. Potential distribution does not require additional terminals, thus saving time and money. Wiring is considerably simplified through integrated cable guides.


CM-N range: Multifunctional



- 45 mm wide enclosure
- Output contacts: 2 c/o contacts
- Continuous voltage range (24-240 V AC/DC) or single-supply
- Setting and operation via front-face operating controls
- Adjustment of threshold values and switching hysteresis via direct reading scale
- Adjustable time delays
- Integrated and snap-fitted front-face marker label
- Sealable transparent cover (accessory)

Integrated marker label

Integrated marker labels allow the product to be marked quickly and simply. No additional marking labels are required.



2CDC 253 064 F0006



2CDC 253 009 F0005

Sealable transparent covers

Protection against unauthorized changes of time and/or threshold values in sizes 22.5 and 45 mm wide (optionally available as an accessory).

Safety

The "real distance" is hidden. The clearance and the creepage distances of our products exceed international standards and substantially increase the safety of our products.



2CDC 253 011 F 0003


Measuring and monitoring relays

CM and C5xx range

Monitoring features and application ranges

Single-phase current and voltage monitoring

- Over- or undercurrent monitoring
CM-SRS and CM-SRS.M
- Over- and undercurrent monitoring
CM-SFS
- Over- or undervoltage monitoring
CM-ESS and CM-ESS.M
- Over- and undervoltage monitoring
CM-EFS



Current monitoring


- Monitoring of motor current consumption
- Monitoring of lighting installations and heating circuits
- Monitoring of hoisting gear and transportation equipment overload
- Monitoring of locking devices, electromechanical brake gear and locked rotor

Voltage monitoring

- Speed monitoring of DC motors
- Monitoring of battery voltages and other supply networks
- Monitoring of upper and lower voltage threshold values

Three-phase monitoring

- Phase loss
CM-PBE
- Over- and undervoltage
CM-PVE
- Phase sequence and phase loss
CM-PFE and CM-PFS
- Phase sequence and phase loss, over- and undervoltage
CM-PSS.xx and CM-PVS.xx
- Phase sequence and phase loss, unbalance
CM-PAS.xx
- Phase sequence and phase loss, unbalance, over- and undervoltage
CM-MPS.xx and CM-MPN.xx




Three-phase voltage monitoring

- Voltage monitoring of mobile three-phase equipment
- Protection of personnel and installations against phase reversal
- Monitoring of the supply voltage to machines and installations
- Protection of equipment against damage caused by unstable supply voltage
- Switching to emergency or auxiliary supply
- Protection of motors against damage caused by unbalanced phase voltages and phase loss

Insulation monitoring

CM-IWN-AC for electrically isolated AC networks, and CM-IWN-DC for electrically isolated DC networks.




Insulation monitoring

- Monitoring of electrically isolated supply mains for insulation resistance failure
- Detection of initial faults
- Protection against ground faults

Motor load monitoring

CM-LWN monitors load states of single- and three-phase asynchronous motors.



Motor load monitoring

- Detection of V-belt breaking
- Motor protection against overload
- Monitoring of filters for clogging
- Protection of pumps against dry running
- Detection of high pressure in conduit systems
- Monitoring for dulling blades in sawing and cutting machines


Measuring and monitoring relays

CM and C5xx range

Monitoring features and application ranges

Thermistor motor protection

CM-MSE, CM-MSS and CM-MSN provide full protection of motors with integrated PTC resistor sensors.




Thermistor motor protection

- Protection of motors against thermal overload, e. g. caused by insufficient cooling, heavy load starting conditions, undersized motors, etc.

Liquid level monitoring

CM-ENE, CM-ENS and CM-ENN for control and regulation of liquid levels and ratios of mixtures of conductive fluids.




Liquid level monitoring and control

- Protection of pumps against dry running
- Protection against container overflow
- Control of liquid levels
- Detection of leaks
- Control of mixing ratios

Contact protection, sensor evaluation

The CM-KRN protects sensitive control contacts from excessive loads and can store switch positions. The CM-SIS supplies and evaluates NPN and PNP sensors.




Contact protection / sensor evaluation

- Storage of the switching states of bouncing contacts
- Amplification of the switch state information of sensitive contacts
- Supply and evaluation of NPN or PNP sensors

Temperature monitoring

Acquisition, messaging and regulation of temperatures of solid, liquid and gaseous media in processes and machines via PT100, PT1000, KTY83, KTY 84 or NTC sensors with C510, C511, C512, C513.




Temperature monitoring

- Motor and system protection
- Control cabinet temperature monitoring
- Frost monitoring
- Temperature limits for process variables, e.g. in the packing or electroplating industry
- Control of systems and machines like heating, air-conditioning and ventilation systems, solar collectors, heat pumps or hot water supply systems
- Monitoring of servomotors with KTY sensors
- Bearing and gear oil monitoring
- Coolant monitoring

Cycle monitoring

Cycle monitor with watchdog function CM-WDS.



Cycle monitoring

- External monitoring of the correct function of programmable logic controllers (plc) and industrial pcs (ipc)

Measuring and monitoring relays

CM and C5xx range

Approvals and marks

2

■ existing □ pending		Current and voltage monitoring, single-phase								Three-phase monitoring											
		CM-SRS.1x	CM-SRS.2x	CM-SRS.M	CM-SFS.2	CM-ESS.1x	CM-ESS.2x	CM-ESS.M	CM-EFS.2	CM-PBE	CM-PVE	CM-PFE	CM-PFS	CM-PSS.x1	CM-PVS.x1	CM-PAS.x1	CM-MPS.x1	CM-MPS.x3	CM-MPN.52	CM-MPN.62	CM-MPN.72
Approvals																					
	UL 508, CAN/CSA C22.2 No.14	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	GL	□	□	□	□	□	□	□	□												
	GOST	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	CB scheme	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	CCC	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	RMRS	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Marks																					
	CE	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	C-Tick	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■

■ existing □ pending		Insulation monitors for ungrounded supply mains					Motor load monitoring			Temperature monitoring				Contact protection, sensor interface							
		CM-IWN-AC	CM-IWN-DC	C558.01	C558.02	C558.03	CM-LWN			C510	C511	C512	C513	CM-KRN	CM-SIS						
Approvals																					
	UL 508, CAN/CSA C22.2 No.14	■	■	■	■		■			■	■	■	■	■	■						
	GL	■	■				■							■	■						
	GOST	■	■				■							■	■						
	CB scheme	■	■				■														
	CCC	■	■				■														
	RMRS	■	■				■							■	■						
Marks																					
	CE	■	■	■	■		■			■	■	■	■	■	■						
	C-Tick	■	■				■								■						

■ existing □ pending		Cycle monitoring				Thermistor motor protection								Liquid level monitoring							
		CM-WDS				CM-MSE	CM-MSS (1)	CM-MSS (2)	CM-MSS (3)	CM-MSS (4)	CM-MSS (5)	CM-MSS (6)	CM-MSS (7)	CM-MSN	CM-ENE MIN	CM-ENE MAX	CM-ENS	CM-ENS UP/...	CM-ENN	CM-ENN UP/...	
Approvals																					
	UL 508, CAN/CSA C22.2 No.14	■				■	■	■	■	■	□	■	■	■	■	■	■	□	■	□	
	GL					■	■	■	■	■	■	■	■			■ ¹⁾		■			
	GOST					■	■	■	■	■	■	■	■	■	■	■	■	■	■		
	II (2) G D, PTB 02 ATEX 3080																				
	CB scheme					■	■	■	■	■	■	■	■	■	■	■	■	■	■		
	CCC					■	■	■	■	■	■	■	■	■	■	■	■	■	■		
	RMRS	■				■	■	■	■	■	■	■	■	■	■	■	■	■	■		
Marks																					
	CE	■				■	■	■	■	■	■	■	■	■	■	■	■	■	■		
	C-Tick					■	■	■	■	■	■	■	■	■	■	■	■	■	■		

¹⁾ Versions with safety isolation without approval






Content

Ordering details	
CM-SRS.1, CM-SRS.2.....	64
CM-SRS.M.....	65
CM-SFS.2	66
CM-ESS.1, CM-ESS.2	67
CM-ESS.M.....	68
CM-EFS.2	69
Technical data	
CM-SRS.1, CM-SRS.2, CM-SRS.M, CM-SFS.2	70
CM-ESS.1, CM-ESS.2, CM-ESS.M, CM-EFS.2	72
Approvals and marks	62
Technical diagrams.....	144
Dimensional drawings	145
Accessories	146
Current transformers	147


Current monitoring relays, single-phase AC/DC - CM-SRS.1 and CM-SRS.2

Ordering details

2



CM-SRS.1



CM-SRS.2

- ① Threshold value adjustment
- ② Hysteresis adjustment
- ③ DIP switches (see DIP switch functions)
- ④ U/T: green LED - control supply voltage, (timing)
- ⑤ R: yellow LED - relay status
- ⑥ I: red LED - over- / undercurrent
- ⑦ Adjustment of the tripping delay T_V



- Monitoring of DC- and AC-currents
- **CM-SRS.x1:** 3 mA - 1 A
- **CM-SRS.x2:** 0.3-15 A
- RMS measuring principle
- One device includes 3 measuring ranges
- Over- or undercurrent monitoring configurable
- Hysteresis adjustable from 3-30 %
- **CM-SRS.2:** Tripping delay T_V adjustable 0; 0.1-30 s
- 3 supply voltage versions
- **CM-SRS.1:** 1 c/o contact
- **CM-SRS.2:** 2 c/o contacts
- 22.5 mm width
- 3 LEDs for status indication

Depending on the configuration, the current monitoring relays **CM-SRS.1** and **CM-SRS.2** can be used for over- or undercurrent monitoring in single-phase AC and/or DC systems. The current to be monitored (measured value) is applied to terminals B1/B2/B3-C. The devices work according to the open-circuit principle.



If the measured value exceeds resp. drops below the adjusted threshold value, the output relay(s) energize(s): on the CM-SRS.1 immediately, on the CM-SRS.2 after the set tripping delay T_V . If the measured value exceeds resp. drops below the threshold value plus resp. minus the adjusted hysteresis, the output relay(s) de-energize(s).

The hysteresis is adjustable within a range of 3-30 % of the threshold value.


Function diagrams CM-SRS.1

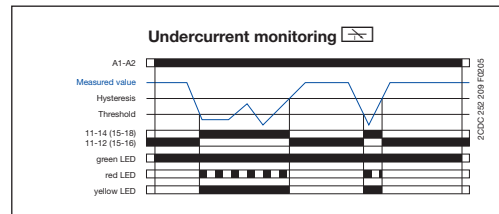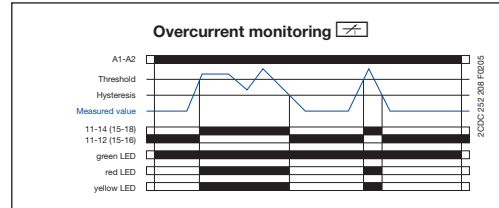


Function diagrams CM-SRS.2

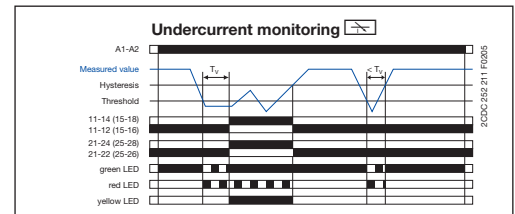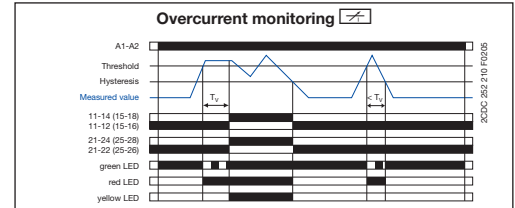


Connection diagram CM-SRS.1

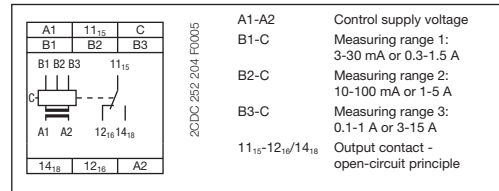

Connection diagram CM-SRS.2

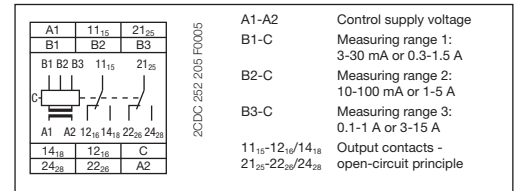

DIP switch functions CM-SRS.1, CM-SRS.2

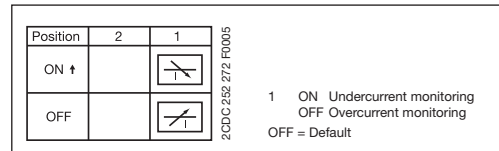

Type	Control supply voltage 50/60 Hz	Tripping delay T_V	Order code	Pack. unit piece	Price 1 piece	Weight 1 piece kg / lb
------	------------------------------------	-------------------------	------------	------------------	---------------	------------------------

Measuring ranges AC/DC: 3-30 mA; 10-100 mA; 0.1-1 A

CM-SRS.11	24-240 V AC/DC	without	1SVR 430 840 R0200	1		0.12 / 0.26
	110-130 V AC		1SVR 430 841 R0200	1		0.15 / 0.33
	220-240 V AC		1SVR 430 841 R1200	1		0.15 / 0.33

Measuring ranges AC/DC: 0.3-1.5 A; 1-5 A; 3-15 A

CM-SRS.12	24-240 V AC/DC	without	1SVR 430 840 R0300	1		0.12 / 0.26
	110-130 V AC		1SVR 430 841 R0300	1		0.15 / 0.33
	220-240 V AC		1SVR 430 841 R1300	1		0.15 / 0.33

Measuring ranges AC/DC: 3-30 mA; 10-100 mA; 0.1-1 A

CM-SRS.21	24-240 V AC/DC	adjustable 0 or 0.1-30 s	1SVR 430 840 R0400	1		0.12 / 0.26
	110-130 V AC		1SVR 430 841 R0400	1		0.15 / 0.33
	220-240 V AC		1SVR 430 841 R1400	1		0.15 / 0.33

Measuring ranges AC/DC: 0.3-1.5 A; 1-5 A; 3-15 A

CM-SRS.22	24-240 V AC/DC	adjustable 0 or 0.1-30 s	1SVR 430 840 R0500	1		0.12 / 0.26
	110-130 V AC		1SVR 430 841 R0500	1		0.15 / 0.33
	220-240 V AC		1SVR 430 841 R1500	1		0.15 / 0.33

• Approvals	62	• Technical data	70
• Technical diagrams	144	• Dimensional drawings	145
• Accessories	146	• Current transformers	147

Current monitoring relays, single-phase AC/DC, multifunctional - CM-SRS.M

Ordering details

2CDC 251 247 F005




CM-SRS.M


- ① Threshold value adjustment
- ② Hysteresis adjustment
- ③ Adjustment of the tripping delay T_V
- ④ Adjustment of the start-up delay T_S
- ⑤ DIP switches (see DIP switch functions)
- ⑥ U/T: green LED - control supply voltage, timing
- ⑦ R: yellow LED - relay status
- ⑧ I: red LED - over- / undercurrent

Depending on the configuration, the current monitoring relays **CM-SRS.M** can be used for over- or undercurrent monitoring in single-phase AC and/or DC systems. The current to be monitored (measured value) is applied to terminals B1/B2/B3-C. Open or closed-circuit principle are configurable. If the measured value exceeds resp. drops below the adjusted threshold value before the set start-up delay T_S is complete, the output relays do not change their actual state. If the measured value exceeds resp. drops below the adjusted threshold value when T_S is complete, the tripping delay T_V starts. If T_V is complete and the measured value is still exceeding resp. below the threshold value plus resp. minus the set hysteresis, the output relays energize / de-energize . If the measured value exceeds resp. drops below the threshold value minus resp. plus the set hysteresis and the latching function is not activated , the output relays de-energize / energize . With activated latching function the output relays remain energized and de-energize only, when the supply voltage is interrupted / the output relays remain de-energized and energize only, when the supply voltage is switched off and then again switched on = Reset. The hysteresis is adjustable within a range of 3-30 % of the threshold value.


Function diagrams CM-SRS.M

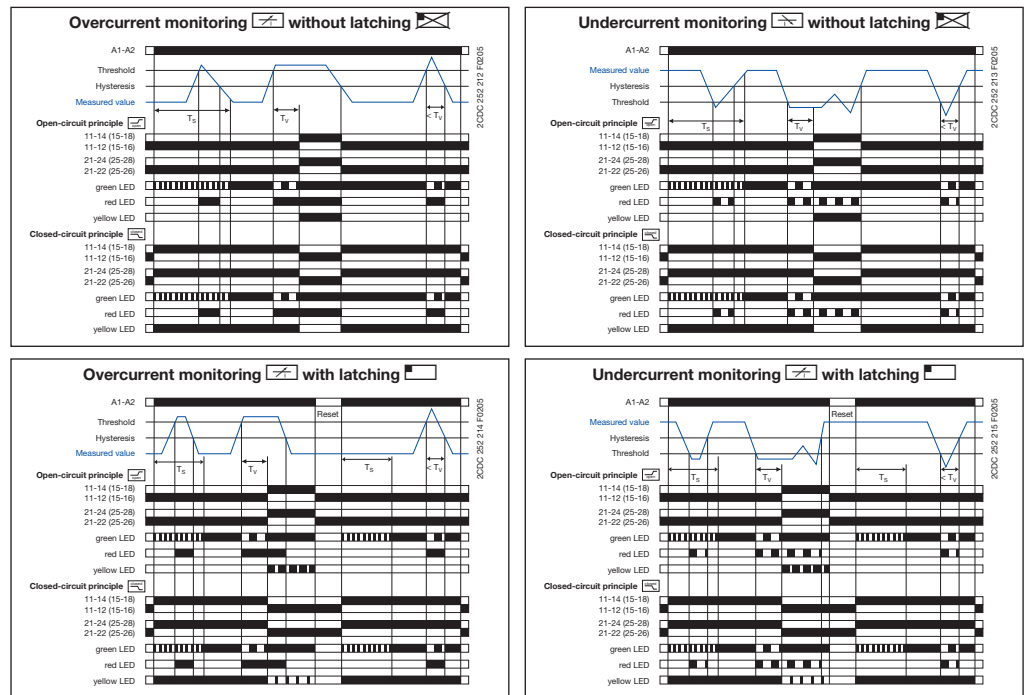

Connection diagram CM-SRS.M

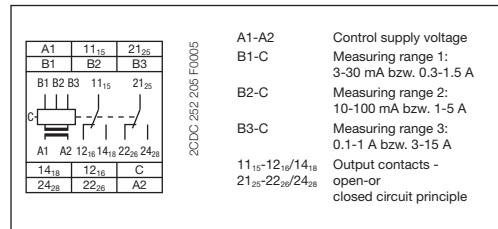

DIP switch functions CM-SRS.M

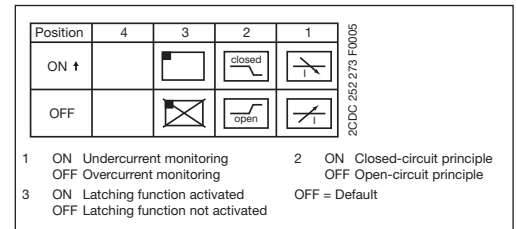

- Monitoring of DC- and AC-currents
- **CM-SRS.M1:** 3 mA - 1 A
- **CM-SRS.M2:** 0.3-15 A
- RMS measuring principle
- One device includes 3 measuring ranges
- Over- or undercurrent monitoring configurable
- Open- or closed circuit principle configurable
- Latching function configurable
- Hysteresis adjustable from 3-30 %
- Start-up delay T_S adjustable 0; 0.1-30 s
- Tripping delay T_V adjustable 0; 0.1-30 s
- 2 c/o contacts
- 22.5 mm width
- 3 LEDs for status indication

Type	Control supply voltage 50/60 Hz	Tripping delay T_V adjustable	Order code	Pack. unit piece	Price 1 piece	Weight 1 piece kg / lb
------	------------------------------------	------------------------------------	------------	------------------	---------------	------------------------

Measuring ranges AC/DC: 3-30 mA; 10-100 mA; 0,1-1 A

CM-SRS.M1	24-240 V AC/DC	0 or 0.1-30 s	1SVR 430 840 R0600	1		0.12 / 0.26
------------------	----------------	---------------	---------------------------	---	--	-------------

Measuring ranges AC/DC: 0,3-1,5 A; 1-5 A; 3-15 A

CM-SRS.M2	24-240 V AC/DC	0 or 0.1-30 s	1SVR 430 840 R0700	1		0.12 / 0.26
------------------	----------------	---------------	---------------------------	---	--	-------------

• Approvals	62	• Technical data	70
• Technical diagrams	144	• Dimensional drawings	145
• Accessories	146	• Current transformers	147

Current monitoring relay, single-phase AC/DC, window monitoring - CM-SFS.2

Ordering details

2



CM-SFS.2

- ① Threshold value adjustment >I for overcurrent
- ② Threshold value adjustment <I for undercurrent
- ③ Adjustment of the tripping delay T_V
- ④ Adjustment of the start-up delay T_S
- ⑤ DIP switches (see DIP switch functions)
- ⑥ U/T: green LED - control supply voltage, timing
- ⑦ R: yellow LED - relay status
- ⑧ I: red LED - over- / undercurrent

- Monitoring of DC- and AC-currents
- **CM-SFS.21:** 3 mA - 1 A
- **CM-SFS.22:** 0.3-15 A
- RMS measuring principle
- One device includes 3 measuring ranges
- Over- and undercurrent monitoring
- ON- or OFF-delay configurable
- Open- or closed circuit principle configurable
- Latching function configurable
- Thresholds for I_{min} and I_{max} adjustable
- Fixed hysteresis of 5 %
- Start-up delay T_S adjustable 0; 0.1-30 s
- Tripping delay T_V adjustable 0; 0.1-30 s
- 1x2 c/o contacts (common signal) or 2x1 c/o contact (separate signals for I_{min} and I_{max})
- 22.5 mm width
- 3 LEDs for status indication

The current window monitoring relays **CM-SFS.2** can be used for the simultaneous monitoring of over- (>I) and undercurrents (<I) in single-phase AC and/or DC systems. Depending on the configuration, one c/o contact each or both c/o contacts in parallel can be used for the over- and undercurrent monitoring. The current to be monitored (measured value) is applied to terminals B1/B2/B3-C. Open- or closed-circuit principle as well as an adjustable ON or OFF tripping delay are configurable.

ON-delayed current window monitoring with parallel switching c/o contacts

If the measured value exceeds resp. drops below the adjusted threshold value before the set start-up delay T_S is complete, the output relays do not change their actual state.

If the measured value exceeds resp. drops below the adjusted threshold value when T_S is complete, the tripping delay T_V starts, when is configured. If T_V is complete and the measured value is still exceeding resp. below the threshold value minus resp. plus the fixed hysteresis (5%), the output relays energize / de-energize .

If the measured value exceeds resp. drops below the threshold value plus resp. minus the hysteresis and the latching function is not activated , the output relays de-energize / energize . With activated latching function the output relays remain energized and de-energize only, when the supply voltage is interrupted / the output relays remain de-energized and energize only, when the supply voltage is switched off and then again switched on = Reset.

OFF-delayed current window monitoring with parallel switching c/o contacts

If the measured value exceeds resp. drops below the adjusted threshold value when the set start-up delay T_S is complete, the output relays energize / de-energize , when is configured, and remain in this position during the set tripping delay T_V .


If the measured value exceeds resp. drops below the threshold value plus resp. minus the fixed hysteresis (5%) and the latching function is not activated , the tripping delay T_V starts.

After completion of T_V , the output relays de-energize / energize , provided that the latching function is not activated . With activated latching function the output relays remain energized and de-energize only, when the supply voltage is interrupted / the output relays remain de-energized and energize only, when the supply voltage is switched off and then again switched on = Reset.


When is adjusted on the device, the functionality is equivalent to the one described above. There is only to consider that in this case, instead of both output relays, only one output relay each will be switched.

">I" = 11₁₅-12₁₆/14₁₈; "<I" = 21₂₅-22₂₆/24₂₈


Function diagrams CM-SFS.2

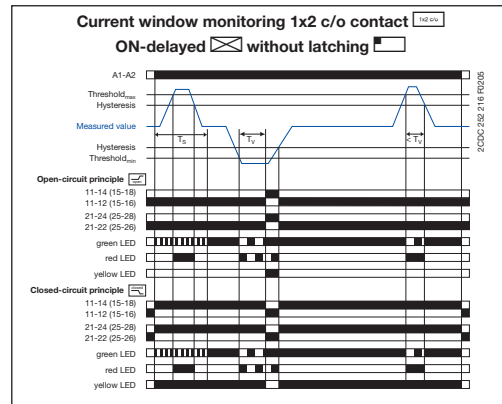


Further function diagrams see data sheet.

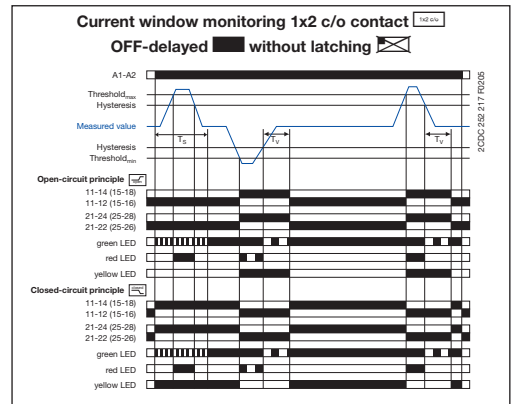

Connection diagram CM-SFS.2

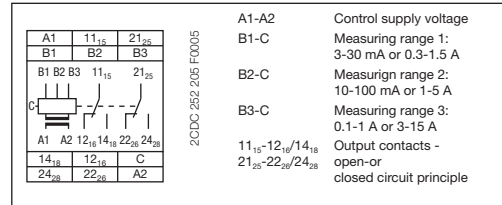

DIP switch function CM-SFS.2

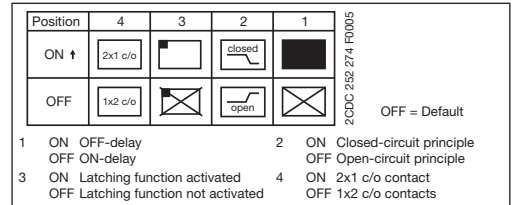

Type	Control supply voltage	Tripping delay	Order code	Pack.-unit	Price	Weight
	50/60 Hz	T_V adjustable		piece	1 piece	1 piece

Measuring ranges AC/DC: 3-30 mA; 10-100 mA; 0.1-1 A

CM-SFS.21	24-240 V AC/DC	0 or 0.1-30 s	1SVR 430 760 R0400	1		0.12 / 0.26
------------------	----------------	---------------	---------------------------	---	--	-------------

Measuring ranges AC/DC: 0.3-1.5 A; 1-5 A; 3-15 A

CM-SFS.22	24-240 V AC/DC	0 or 0.1-30 s	1SVR 430 760 R0500	1		0.12 / 0.26
------------------	----------------	---------------	---------------------------	---	--	-------------

• Approvals	62	• Technical data	70
• Technical diagrams	144	• Dimensional drawings	145
• Accessories	146	• Current transformers	147

Voltage monitoring relays, single-phase AC/DC - CM-ESS.1 and CM-ESS.2

Ordering details



CM-ESS.1





CM-ESS.2

- ① Threshold value adjustment
- ② Hysteresis adjustment
- ③ Adjustment of the measuring range
- ④ DIP switches (see DIP switch functions)
- ⑤ U/T: green LED - control supply voltage, timing
- ⑥ R: yellow LED - relay status
- ⑦ U: red LED - over- / undervoltage
- ⑧ Adjustment of the tripping delay T_V



- Monitoring of DC- and AC-voltages from 3-600 V
- RMS measuring principle
- One device includes 4 measuring ranges: 3-30 V, 6-60 V, 30-300 V, 60-600 V
- Over- or undervoltage monitoring configurable
- Hysteresis adjustable from 3-30 %
- **CM-ESS.2:** Tripping delay T_V adjustable 0; 0.1-30 s
- 3 supply voltage versions
- **CM-ESS.1:** 1 c/o contact
- **CM-ESS.2:** 2 c/o contacts
- 22.5 mm width
- 3 LEDs for status indication

Depending on the configuration, the voltage monitoring relays **CM-ESS.1** and **CM-ESS.2** can be used for over- or undervoltage monitoring in single-phase AC and/or DC systems. The voltage to be monitored (measured value) is applied to terminals B-C. The devices work according the open-circuit principle. If the measured value exceeds resp. drops below the adjusted threshold value, the output relay(s) energize(s); on the CM-ESS.1 immediately, on the CM-ESS.2 after the set tripping delay T_V . If the measured value exceeds resp. drops below the threshold value plus resp. minus the adjusted hysteresis, the output relay(s) de-energize(s). The hysteresis is adjustable within a range of 3-30 % of the threshold value.


Function diagrams CM-ESS.1

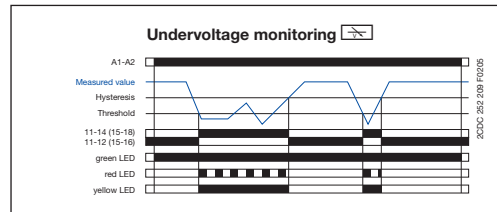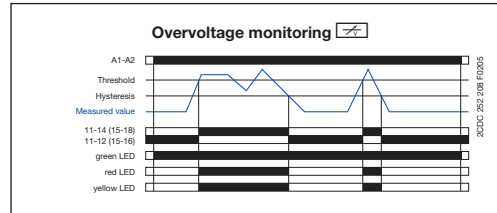


Function diagrams CM-ESS.2

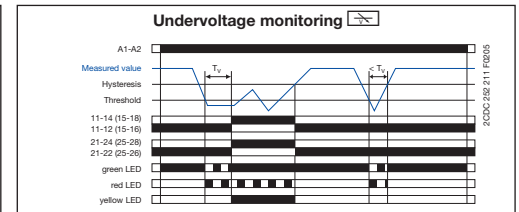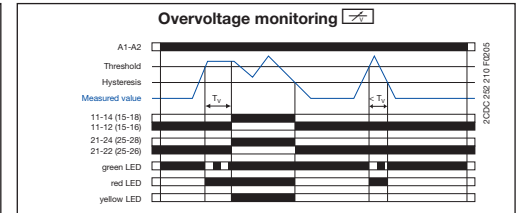


Connection diagram CM-ESS.1

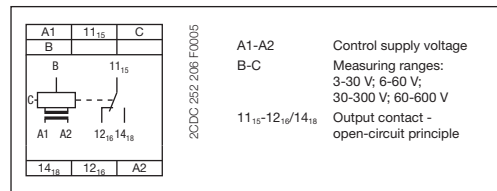

Connection diagram CM-ESS.2

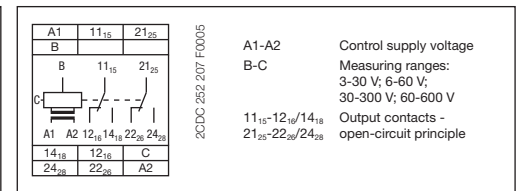

DIP switch functions CM-ESS.1, CM-ESS.2

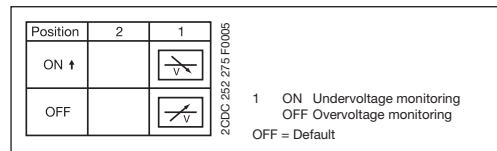

Type	Control supply voltage	Tripping delay	Order code	Pack. unit	Price	Weight
	50/60 Hz	T_V		piece	1 piece	1 piece
						kg / lb

Measuring ranges AC/DC: 3-30 V; 6-60 V; 30-300 V; 60-600 V

Type	Measuring range	Tripping delay	Order code	Pack. unit	Price	Weight
CM-ESS.1	24-240 V AC/DC	without	1SVR 430 830 R0300	1		0.12 / 0.26
	110-130 V AC		1SVR 430 831 R0300	1	0.15 / 0.33	
	220-240 V AC		1SVR 430 831 R1300	1	0.15 / 0.33	
CM-ESS.2	24-240 V AC/DC	adjustable 0 or 0.1-30 s	1SVR 430 830 R0400	1		0.12 / 0.26
	110-130 V AC		1SVR 430 831 R0400	1	0.15 / 0.33	
	220-240 V AC		1SVR 430 831 R1400	1	0.15 / 0.33	

• Approvals	62	• Technical data	72
• Technical diagrams	144	• Dimensional drawings	145
• Accessories	146		

Voltage monitoring relay, single-phase AC/DC, multifunctional - CM-ESS.M

Ordering details

2



CM-ESS.M

- ① Threshold value adjustment
- ② Hysteresis adjustment
- ③ Adjustment of the tripping delay T_V
- ④ Adjustment of the measuring range
- ⑤ DIP switches (see DIP switch functions)
- ⑥ U/T: green LED - control supply voltage
- ⑦ R: yellow LED - relay status
- ⑧ U: red LED - over- / undervoltage

- Monitoring of DC- and AC-voltages from 3-600 V
- RMS measuring principle
- One device includes 4 measuring ranges: 3-30 V; 6-60 V; 30-300 V; 60-600 V
- Over- or undervoltage monitoring configurable
- Open- or closed circuit principle configurable
- Latching function configurable
- Hysteresis adjustable from 3-30 %
- Tripping delay T_V adjustable 0; 0.1-30 s
- 2 c/o contacts
- 22.5 mm width
- 3 LEDs for status indication


Depending on the configuration, the voltage monitoring relay **CM-ESS.M** can be used for over- or undervoltage monitoring in single-phase AC and/or DC systems. The voltage to be monitored (measured value) is applied to terminals B-C. Open or closed-circuit principle are selectable.

If the measured value exceeds resp. drops below the adjusted threshold value, the tripping delay T_V starts. If T_V is complete and the measured value is still exceeding resp. below the threshold value plus resp. minus the set hysteresis, the output relays energize / de-energize .


If the measured value exceeds resp. drops below the threshold value plus resp. minus the set hysteresis and the latching function is not activated , the output relays de-energize / energize . With activated latching function the output relays remain energized and de-energize only, when the supply voltage is interrupted / the output relays remain de-energized and energize only, when the supply voltage is switched off and then again switched on = Reset.

The hysteresis is adjustable within a range of 3-30 % of the threshold value.


Function diagrams CM-ESS.M

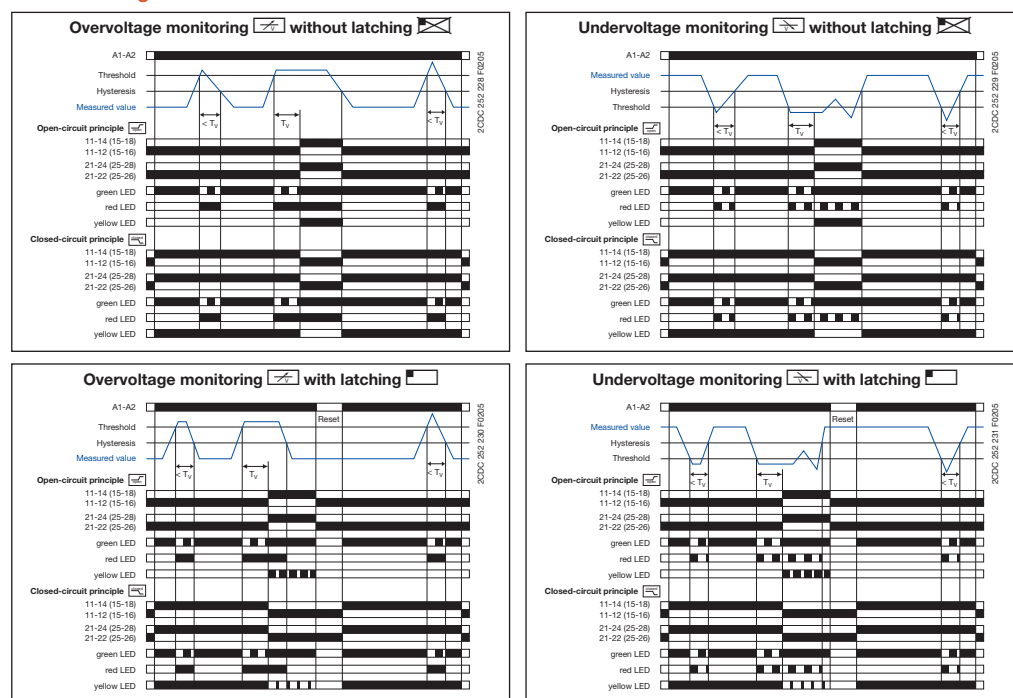

Connection diagram CM-ESS.M

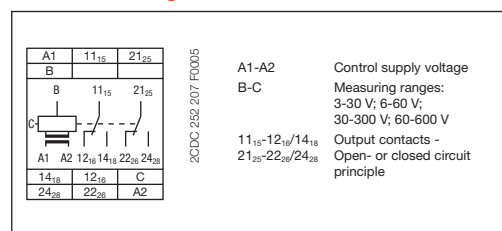

DIP switch functions CM-ESS.M

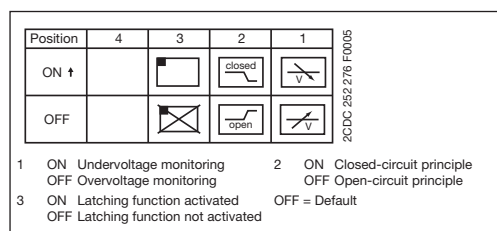

Type	Control supply voltage	Tripping delay	Order code	Pack. unit piece	Price 1 piece	Weight 1 piece kg / lb
	50/60 Hz	T_V adjustable				

Measuring ranges AC/DC: 3-30 V; 6-60 V; 30-300 V; 60-600 V

CM-ESS.M	24-240 V AC/DC	0 or 0.1-30 s	1SVR 430 830 R0500	1		0.12 / 0.26
-----------------	----------------	---------------	---------------------------	---	--	-------------

• Approvals	62	• Technical data	72
• Technical diagrams	144	• Dimensional drawings	145
• Accessories	146		

Voltage monitoring relay, single-phase AC/DC, window monitoring - CM-EFS.2

Ordering details

2CDC 251 251 F005



CM-EFS.2

- ① Threshold value adjustment >U for overvoltage
- ② Threshold value adjustment <U for undervoltage
- ③ Adjustment of the tripping delay T_V
- ④ Adjustment of the measuring range
- ⑤ DIP switches (see DIP switch functions)
- ⑥ U/T: green LED - control supply voltage, timing
- ⑦ R: yellow LED - relay status
- ⑧ U: red LED - over- / undervoltage

- Monitoring of DC- and AC-voltages from 3-600 V
- RMS measuring principle
- One device includes 4 measuring ranges: 3-30 V; 6-60 V; 30-300 V; 60-600 V
- Over- and undervoltage monitoring
- ON- or OFF-delay configurable
- Open- or closed circuit principle configurable
- Latching function configurable
- Thresholds for U_{min} and U_{max} adjustable
- Fixed hysteresis of 5 %
- Tripping delay T_V adjustable 0; 0.1-30 s
- 1x2 c/o contacts (common signal) or 2x1 c/o contact (separate signals for U_{min} and U_{max})
- 22.5 mm width
- 3 LEDs for status indication

The voltage window monitoring relay **CM-EFS.2** can be used for the simultaneous monitoring of over- (>U) and undervoltages (<U) in single-phase AC and/or DC systems. Depending on the configuration, one c/o contact each or both c/o contacts in parallel can be used for the over- and undervoltage monitoring. The voltage to be monitored (measured value) is applied to terminals B-C. Open- or closed-circuit principle as well as an adjustable ON or OFF tripping delay are configurable.

ON-delayed voltage window monitoring with parallel switching c/o contacts

If the measured value exceeds resp. drops below the adjusted threshold value, the tripping delay T_V starts, when is configured. If T_V is complete and the measured value is still exceeding resp. below the threshold value minus resp. plus the fixed hysteresis (5%), the output relays energize /de-energize .

If the measured value exceeds resp. drops below the threshold value plus resp. minus the hysteresis and the latching function is not activated , the output relays de-energize / energize . With activated latching function the output relays remain energized and de-energize only, when the supply voltage is interrupted / the output relays remain de-energized and energize only, when the supply voltage is switched off and then again switched on = Reset.

OFF-delayed voltage window monitoring with parallel switching c/o contacts

If the measured value exceeds resp. drops below the adjusted threshold value, the output relays energize / de-energize , when is configured, and remain in this position during the set tripping delay T_V .


If the measured value exceeds resp. drops below the threshold value plus resp. minus the fixed hysteresis (5%) and the latching function is not activated , the tripping delay T_V starts.

After completion of T_V , the output relays de-energize / energize , provided that the latching function is not activated . With activated latching function the output relays remain energized and de-energize only, when the supply voltage is interrupted / the output relays remain de-energized and energize only, when the supply voltage is switched off and then again switched on = Reset.


When is adjusted on the device, the functionality is equivalent to the one described above. There is only to consider that in this case, instead of both output relays, only one output relay each will be switched.

">U" = 11₁₅-12₁₆/14₁₈; "<U" = 21₂₅-22₂₆/24₂₈


Function diagrams CM-EFS.2

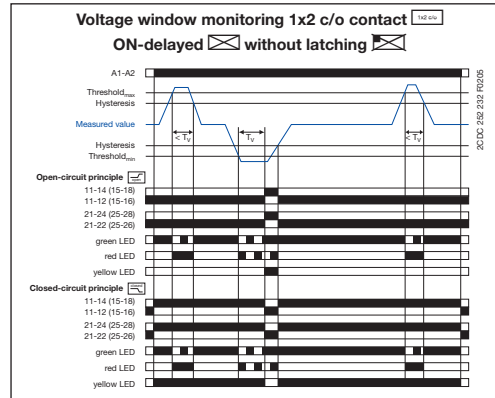

Further function diagrams see data sheet.

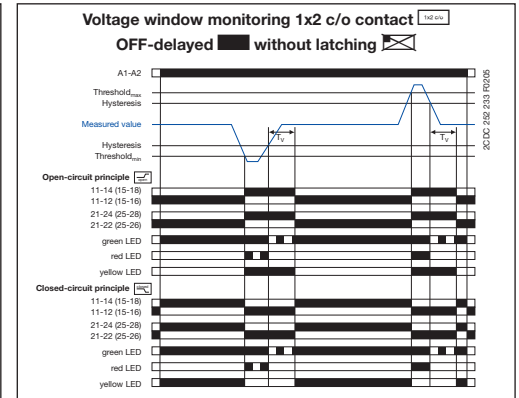

Connection diagram CM-EFS.2

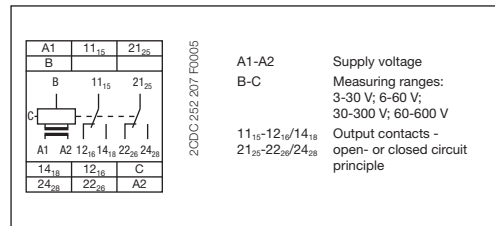

DIP switch functions CM-EFS.2

Position	4	3	2	1
ON ↑	<input type="checkbox"/> 2x1 c/o	<input type="checkbox"/>	<input type="checkbox"/> closed	<input type="checkbox"/>
OFF	<input type="checkbox"/> 1x2 c/o	<input type="checkbox"/>	<input type="checkbox"/> open	<input type="checkbox"/>

OFF = Default

1	ON OFF-delay	2	ON Closed-circuit principle
	OFF ON-delay		OFF Open-circuit principle
3	ON Latching function activated	4	ON 2x1 c/o contact
	OFF Latching function not activated		OFF 1x2 c/o contacts

Type	Control supply voltage	Tripping delay	Order code	Pack. unit piece	Price 1 piece	Weight 1 piece kg / lb
	50/60 Hz	T_V adjustable				









Measuring ranges AC/DC: 3-30 V; 6-60 V; 30-300 V; 60-600 V

CM-EFS.2	24-240 V AC/DC	0 or 0.1-30 s	1SVR 430 750 R0400	1		0.12 / 0.26
-----------------	----------------	---------------	---------------------------	---	--	-------------

• Approvals	62	• Technical data	72
• Technical diagrams	144	• Dimensional drawings	145
• Accessories	146		

Current monitoring relays, single-phase CM-SRS.1, CM-SRS.2, CM-SRS.M and CM-SFS.2

Technical data

Type	CM-SRS.1	CM-SRS.2	CM-SRS.M	CM-SFS.2			
Input circuit - Supply circuit	A1-A2						
Rated control supply voltage U_s	A1-A2	110-130 V AC					
	A1-A2	220-240 V AC					
	A1-A2	24-240 V AC/DC					
Rated control supply voltage U_s tolerance	-15...+10 %						
Rated frequency	AC versions	50/60 Hz					
	AC/DC versions	50/60 Hz or DC					
Current / power consumption	24 V DC	115 V AC	230 V AC				
	110-130 V AC	-	24 mA / 2.6 VA	-			
	220-240 V AC	-	-	12 mA / 2.6 VA			
	24-240 V AC/DC	30 mA / 0.75 W	17 mA / 1.9 VA	11 mA / 2.6 VA			
On-period	100 %						
Power failure buffering	20 ms						
Transient overvoltage protection	Varistors						
Input circuit - Measuring circuit	B1/B2/B3-C						
Monitoring function	over- or undercurrent monitoring configurable			over- and under- current monitoring			
Measuring method	RMS measuring principle						
Measuring inputs	Terminal connection	CM-SxS.x1		CM-SxS.x2			
	Measuring ranges AC/DC	B1-C	B2-C	B3-C	B1-C	B2-C	B3-C
	Input resistance	3-30 mA	10-100 mA	0.1-1 A	0.3-1.5 A	1-5 A	3-15 A ²⁾
	Pulse overload capacity $t < 1$ s	3.3 Ω	1 Ω	0.1 Ω	0.05 Ω	0.01 Ω	0.0025 Ω
	Continuous capacity	500 mA	1 A	10 A	15 A	50 A	100 A
	50 mA	150 mA	1.5 A	2 A	7 A	17 A	
Threshold value(s)	adjustable within the indicated measuring range						
Setting accuracy of threshold value	10 %						
Repeat accuracy (constant parameters)	± 0.07 % of full scale						
Hysteresis related to the threshold value	3-30 % adjustable			5 % fixed			
Measuring signal frequency range	DC / 15 Hz - 2 kHz						
Rated measuring signal frequency range	DC / 50-60 Hz						
Maximum response time	AC: 80 ms / DC: 120 ms						
Measuring error within the supply voltage tolerance	≤ 0.5 %						
Measuring error within the temperature range	≤ 0.06 % / $^{\circ}\text{C}$						
Timing circuit							
Start-up delay T_s	none		0 or 0.1-30 s adjustable				
Tripping delay T_v	none	0 or 0.1-30 s adjustable					
Repeat accuracy (constant parameters)	± 0.07 % of full scale						
Timing error within supply voltage tolerance	-	≤ 0.5 %					
Timing error within temperature range	-	≤ 0.06 % / $^{\circ}\text{C}$					
Indication of operational states							
Control supply voltage	U/T: green LED	 : control supply voltage applied,  : start-up delay T_s active,  : tripping delay T_v active					
Measured value	I: red LED	 : overcurrent,  : undercurrent					
Relay status	R: yellow LED	 : relay energized, no latching function  : relay energized, active latching function  : relay de-energized, active latching function					
Output circuits	11(15)-12(16)/14(18), 21(25)-22(26)/24(28) - Relays						
Kind of output	1 c/o contact	2 c/o contacts		1x2 c/o contacts or 2x1 c/o contact configurable			
Operating principle ¹⁾	open-circuit principle		open- or closed-circuit principle configurable				
Contact material	AgNi						
Rated voltage (VDE 0110, IEC 947-1)	250 V						
Minimum switching voltage / minimum switching current	24 V / 10 mA						
Maximum switching voltage / maximum switching current	250 V AC / 4 A AC						

Current monitoring relays, single-phase CM-SRS.1, CM-SRS.2, CM-SRS.M and CM-SFS.2

Technical data










Type		CM-SRS.1	CM-SRS.2	CM-SRS.M	CM-SFS.2
Rated operational current (IEC 60947-5-1)	AC12 (resistive) at 230 V		4 A		
	AC15 (inductive) at 230 V		3 A		
	DC12 (resistive) at 24 V		4 A		
	DC13 (inductive) at 24 V		2 A		
AC rating (UL 508)	Utilization category (Control Circuit Rating Code)		B 300		
	max. rated operational voltage		300 V AC		
	max. continuous thermal current at B 300		5 A		
	max. making/breaking apparent power (Make/Break) at B 300		3600/360 VA		
Mechanical lifetime		30x10 ⁶ switching cycles			
Electrical lifetime (AC12, 230 V, 4 A)		0.1x10 ⁶ switching cycles			
Short-circuit capacity / maximum fuse rating	n/c contact	6 A fast-acting	10 A fast-acting		6 A fast-acting
	n/o contact		10 A fast-acting		
General data					
Dimensions (W x H x D)		22.5 x 78 x 100 mm (0.89 x 3.07 x 3.94 inch)			
Mounting		DIN rail (EN 50022)			
Mounting position		any			
Degree of protection enclosure / terminals		IP50 / IP20			
Electrical connection					
Wire size	fine-strand with(out) wire end ferrule	2 x 0.75-2.5 mm ² (2 x 18-14 AWG)			
	rigid	2 x 0.5-4 mm ² (2 x 20-12 AWG)			
Stripping length		7 mm (0.28 inch)			
Tightening torque		0.6-0.8 Nm			
Environmental data					
Ambient temperature range operation / storage		-20...+60 °C / -40...+85 °C			
Damp heat (IEC 60068-2-30)		55 °C, 6 cycles			
Vibration (sinusoidal) (IEC/EN 60255-21-1)		Class 2			
Shock (IEC/EN 60255-21-2)		Class 2			
Isolation data					
Rated insulation voltage (VDE 0110, IEC 60947-1, IEC/EN 60255-5)	supply / measuring circuit / output	600 V			
	supply / output 1 / output 2	250 V			
Rated impulse withstand voltage U _{imp} (IEC/EN 60947-1, IEC/EN 60255-5)	supply / measuring circuit / output	6 kV 1.2/50 μs			
	supply / output 1 / output 2	4 kV 1.2/50 μs			
Pollution degree (VDE 0110, IEC 664, IEC/EN 60255-5)		3			
Overvoltage category (VDE 0110, IEC 664, IEC/EN 60255-5)		III			
Standards					
Product standard		IEC/EN 60255-6			
Low Voltage Directive		2006/95/EC			
EMC Directive		2004/108/EC			
Electromagnetic compatibility					
Interference immunity		IEC/EN 61000-6-2			
electrostatic discharge (ESD)	IEC/EN 61000-4-2	Level 3			
electromagnetic field (HF radiation resistance)	IEC/EN 61000-4-3	Level 3			
fast transients (Burst)	IEC/EN 61000-4-4	Level 3			
powerful impulses (Surge)	IEC/EN 61000-4-9	Level 3			
HF line emission	IEC/EN 61000-4-6	Level 3			
Interference emission		IEC/EN 61000-6-3			
electromagnetic field (HF radiation resistance)	IEC/CISPR 22; EN 55022	Class B			
HF line emission	IEC/CISPR 22; EN 55022	Class B			

¹) Open-circuit principle: output relay energizes if the measured value exceeds / falls below the adjusted threshold value
 Closed-circuit principle: output relay de-energizes if measured value exceeds / falls below the adjusted threshold value
²) In case of measured currents > 10 A, lateral spacing has to be min. 10 mm

• Approvals 62

Voltage monitoring relays, single-phase CM-ESS.1, CM-ESS.2, CM-ESS.M and CM-EFS

Technical data

Type	CM-ESS.1	CM-ESS.2	CM-ESS.M	CM-EFS.2
Input circuit - Supply circuit	A1-A2			
Rated control supply voltage U_s	A1-A2	110-130 V AC		
	A1-A2	220-240 V AC		
	A1-A2	24-240 V AC/DC		
Rated control supply voltage U_s tolerance	-15...+10 %			
Rated frequency	AC versions	50/60 Hz		
	AC/DC versions	50/60 Hz or DC		
Current / power consumption		24 V DC	115 V AC	230 V AC
	110-130 V AC	-	24 mA / 2.6 VA	-
	220-240 V AC	-	-	12 mA / 2.6 VA
	24-240 V AC/DC	30 mA / 0.75 W	17 mA / 1.9 VA	11 mA / 2.6 VA
On-period	100 %			
Power failure buffering	20 ms			
Transient overvoltage protection	Varistors			
Input circuit - Measuring circuit	B-C			
Monitoring function	over- or undervoltage monitoring configurable			over- and undervoltage monitoring
Measuring method	RMS measuring principle			
Measuring inputs	Terminal connection	CM-ExS		
	Measuring range AC/DC	B-C	B-C	B-C
	Input resistance	3-30 V	6-60 V	30-300 V
	Pulse overload capacity $t < 1$ s	600 k Ω	600 k Ω	600 k Ω
		800 V	800 V	800 V
Continuous capacity	660 V	660 V	660 V	
Threshold value(s)	adjustable within the indicated measuring range			
Setting accuracy of threshold value	10 %			
Repeat accuracy (constant parameters)	± 0.07 % of full scale			
Hysteresis related to the threshold value	3-30 % adjustable			5 % fixed
Measuring signal frequency range	DC / 15 Hz - 2 kHz			
Rated measuring signal frequency range	DC / 50-60 Hz			
Maximum response time	AC: 80 ms / DC: 120 ms			
Measuring error within the supply voltage tolerance	≤ 0.5 %			
Measuring error within the temperature range	≤ 0.06 % / $^{\circ}\text{C}$			
Transient overvoltage protection	Varistors			
Timing circuit				
Delay time T_v	none	0 or 0.1-30 s adjustable		
Repeat accuracy (constant parameters)	± 0.07 % of full scale			
Timing error within supply voltage tolerance	-	≤ 0.5 %		
Timing error within temperature range	-	≤ 0.06 % / $^{\circ}\text{C}$		
Indication of operational states				
Control supply voltage	U/T: green LED	 : control supply voltage applied,  : tripping delay T_v active		
Measured value	U: red LED	 : overvoltage,  : undervoltage		
Relay status	R: yellow LED	 : relay energized, no latching function  : relay energized, active latching function  : relay de-energized, active latching function		
Output circuits	11(15)-12(16)/14(18), 21(25)-22(26)/24(28) - Relays			
Kind of output	1 c/o contact	2 c/o contacts		1x2 c/o contacts or 2x1 c/o contact configurable
Operating principle ¹⁾	open-circuit principle		open- or closed-circuit principle configurable	
Contact material	AgNi			
Rated voltage (VDE 0110, IEC 947-1)	250 V			
Minimum switching voltage / minimum switching current	24 V / 10 mA			
Maximum switching voltage / maximum switching current	250 V AC / 4 A AC			

Voltage monitoring relays, single-phase CM-ESS.1, CM-ESS.2, CM-ESS.M and CM-EFS


Technical data

Type		CM-ESS.1	CM-ESS.2	CM-ESS.M	CM-EFS.2
Rated operational current (IEC 60947-5-1)	AC12 (resistive) at 230 V		4 A		
	AC15 (inductive) at 230 V		3 A		
	DC12 (resistive) at 24 V		4 A		
	DC13 (inductive) at 24 V		2 A		
AC rating (UL 508)	Utilization category (Control Circuit Rating Code)		B 300		
	max. rated operational voltage		300 V AC		
	max. continuous thermal current at B 300		5 A		
	max. making/breaking apparent power (Make/Break) at B 300		3600/360 VA		
Mechanical lifetime		30x10 ⁶ switching cycles			
Electrical lifetime (AC12, 230 V, 4 A)		0.1x10 ⁶ switching cycles			
Short-circuit capacity / maximum fuse rating	n/c contact	6 A fast-acting	10 A fast-acting	6 A fast-acting	
	n/o contact		10 A fast-acting		
General data					
Dimensions (W x H x D)		22.5 x 78 x 100 mm (0.89 x 3.07 x 3.94 inch)			
Mounting		DIN rail (EN 50022)			
Mounting position		any			
Degree of protection	enclosure / terminals	IP50 / IP20			
Electrical connection					
Wire size	fine-strand with(out) wire end ferrule	2 x 0.75-2.5 mm ² (2 x 18-14 AWG)			
	rigid	2 x 0.5-4 mm ² (2 x 20-12 AWG)			
Stripping length		7 mm (0.28 inch)			
Tightening torque		0.6-0.8 Nm			
Environmental data					
Ambient temperature range	operation / storage	-20...+60 °C / -40...+85 °C			
Damp heat (IEC 60068-2-30)		55 °C, 6 cycle			
Vibration (sinusoidal) (IEC/EN 60255-21-1)		Class 2			
Shock (IEC/EN 60255-21-2)		Class 2			
Isolation data					
Rated insulation voltage (VDE 0110, IEC 60947-1, IEC/EN 60255-5)	supply / measuring circuit / output	600 V			
	supply / output 1 / output 2	250 V			
Rated impulse withstand voltage U _{imp} (IEC/EN 60947-1, IEC/EN 60255-5)	supply / measuring circuit / output	6 kV 1.2/50 μs			
	supply / output 1 / output 2	4 kV 1.2/50 μs			
Pollution degree (VDE 0110, IEC 664, IEC/EN 60255-5)		3			
Overvoltage category (VDE 0110, IEC 664, IEC/EN 60255-5)		III			
Standards					
Product standard		IEC/EN 60255-6			
Low Voltage Directive		2006/95/EC			
EMC Directive		2004/108/EC			
Electromagnetic compatibility					
Interference immunity		IEC/EN 61000-6-2			
electrostatic discharge (ESD)	IEC/EN 61000-4-2	Level 3			
electromagnetic field (HF radiation resistance)	IEC/EN 61000-4-3	Level 3			
fast transients (Burst)	IEC/EN 61000-4-4	Level 3			
powerful impulses (Surge)	IEC/EN 61000-4-9	Level 3			
HF line emission	IEC/EN 61000-4-6	Level 3			
Interference emission		IEC/EN 61000-6-3			
electromagnetic field (HF radiation resistance)	IEC/CISPR 22; EN 55022	Class B			
HF line emission	IEC/CISPR 22; EN 55022	Class B			

¹⁾ Open-circuit principle: output relay energizes if the measured value exceeds \geq / falls below \leq the adjusted threshold value
 Closed-circuit principle: output relay de-energizes if measured value exceeds \geq / falls below \leq the adjusted threshold value²⁾

Notes

2

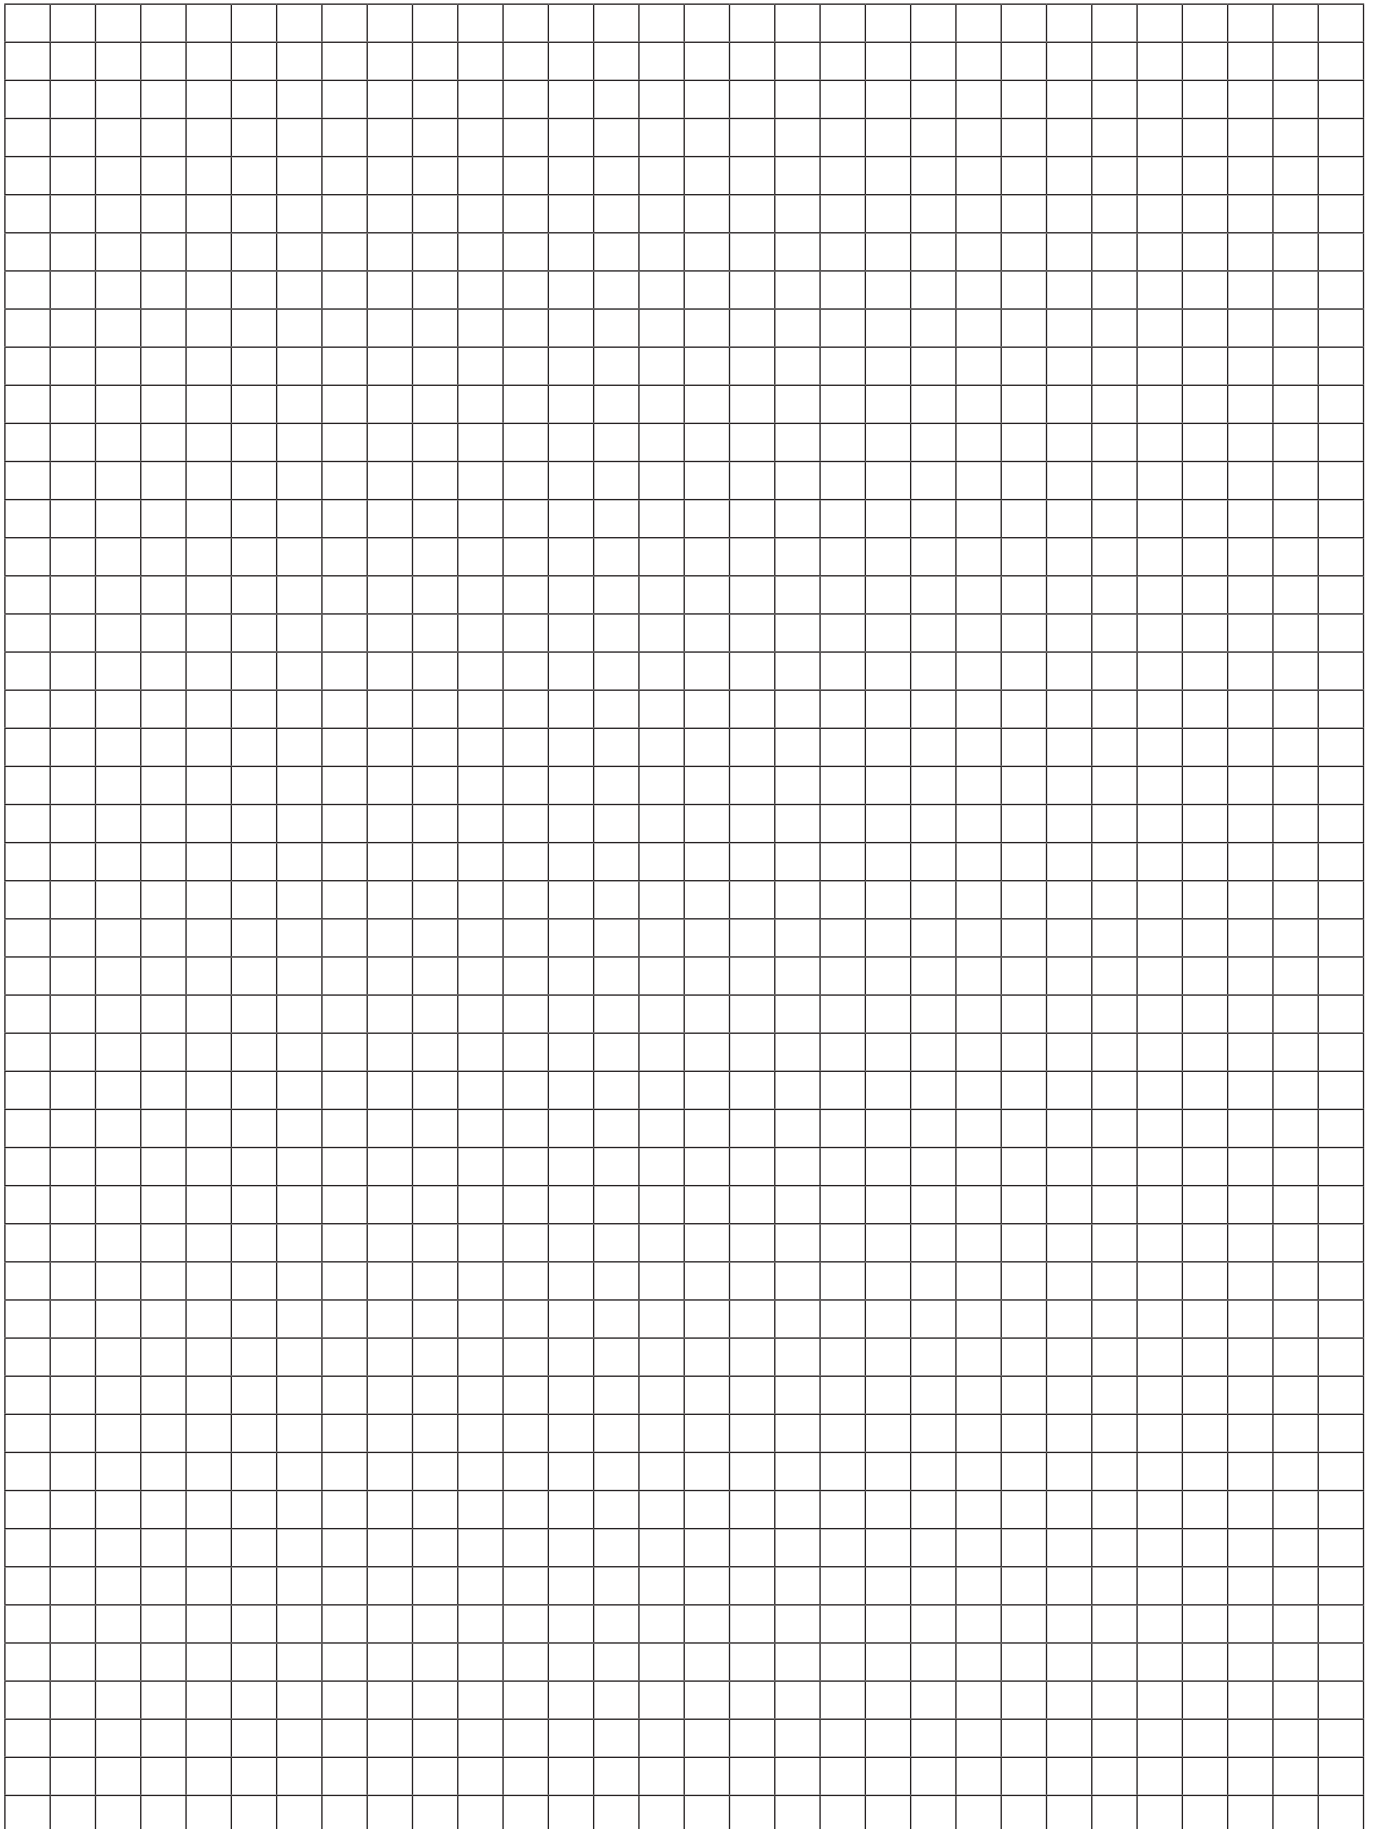

**New
generation**

ABB Three-phase monitors

2

Content

Novelties.....	76
Selection / Conversation table	77
Ordering details	
CM-PBE, CM-PVE	78
CM-PFE, CM-PFS.....	79
CM-PSS.xx, CM-PVS.xx.....	80
CM-PAS.xx, CM-MPS.x1	81
CM-MPS.x3, CM-MPN.x2	82
Functional description / function diagrams.....	83
Technical data	
CM-PBE, CM-PVE, CM-PFE, CM-PFS.....	86
CM-PSS.xx, CM-PVS.xx, CM-PAS.xx	88
CM-MPS.x1	90
CM-MPS.x3, CM-MPN.x2	92
Approvals and marks	62
Technical diagrams.....	144
Dimensional drawings	145
Accessories	146

Three-phase monitoring relays

Novelties




2





Modifications in comparison to the predecessor version

Improved handling / display



Adjustment of the type of tripping delay ¹⁾

Phase-out types	New generation
Sliding switch 	Rotary switch ¹⁾ DIP switches ¹⁾  

Adjustment of the time values

Phase-out types	New generation
Potentiometer with linear scale 	Potentiometer with logarithmic scale  The new potentiometer allows a very exact time adjustment in the lower time range. Furthermore the time delay can be switched off by turning to the left stop.

Status LEDs

Phase-out types	New generation
	 The order and color of the LEDs have been adapted.

¹⁾ depending on device

Expanded functionality

ABB's new generation of three-phase monitoring relays feature additional functions making the application field for the devices considerably larger.

Selectable phase sequence monitoring ¹⁾

The phase sequence monitoring can be switched off by means of a rotary switch or a DIP switch ¹⁾. This enables monitoring of three-phase mains where phase sequence is not relevant for the application, for example in case of motors with forward and reverse rotation, heating applications, etc.

Automatic phase sequence correction ¹⁾

The automatic phase sequence correction is activated by means of a DIP switch. With activated phase sequence correction, it is ensured that for any non-fixed or portable equipment, e.g. construction machinery, the correct phase sequence is always applied to the input terminals of the load. For details regarding the wiring, please see function description / diagrams.

Expanded type designation

The new type designation is descriptive and one-to-one.

Structure of the type designation

CM-__x.y.z

x: width of enclosure


y: measuring / supply range

z: rated frequency /
operating principle of the output relays

Three-phase monitoring relays

Innovations

Selection and conversion table

 adjustable
 fix fixed value

	CM-PBE	CM-PBE	CM-PVE	CM-PVE	CM-PFE	CM-PFS	CM-PSS.31	CM-PSS.41	CM-PVS.31	CM-PVS.41	CM-PAS.31	CM-PAS.41	CM-MPS.11	CM-MPS.21	CM-MPS.31	CM-MPS.41	CM-MPS.23	CM-MPS.43	CM-MPN.52	CM-MPN.62	CM-MPN.72
Rated control supply voltage U_s																					
90-170 V AC													■								
160-300 V AC									■		■				■						
180-280 V AC														■							
185-265 V AC			■														■				
208-440 V AC					■																
200-500 V AC						■															
220-240 V AC	■																				
320-460 V AC				■																	
300-500 V AC										■		■				■		■			
350-580 V AC																			■		
380 V AC							■														
380-440 V AC		■																			
400 V AC								■													
450-720 V AC																				■	
530-820 V AC																					■
Rated frequency																					
50/60 Hz	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■			■	■	■
50/60/400 Hz																	■	■			
Suitable for monitoring																					
Single-phase mains ¹⁾	■		■										■	■			■				
Three-phase mains	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Monitoring function																					
Phase failure	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Phase sequence					■	■	⊕	⊕	⊕	⊕	■	■	⊕	⊕	⊕	⊕	⊕	⊕	⊕	⊕	⊕
Automatic phase sequence correction																	⊕	⊕	⊕	⊕	⊕
Overvoltage			■	■			■	■	■	■			■	■	■	■	■	■	■	■	■
Undervoltage			■	■			■	■	■	■			■	■	■	■	■	■	■	■	■
Unbalance											■	■	■	■	■	■	■	■	■	■	■
Neutral ²⁾	■		■										■ ³⁾	■ ³⁾			■ ³⁾				
Thresholds																					
Thresholds	fix	fix	fix	fix	fix	fix	fix	fix	⊕	⊕	⊕	⊕	⊕	⊕	⊕	⊕	⊕	⊕	⊕	⊕	⊕
Timing function for tripping delay t_v / times																					
ON-delay						fix							⊕	⊕							
ON- and OFF-delay	fix	fix	fix	fix	fix																
ON- or OFF-delay (⊕)							⊕	⊕	⊕	⊕			⊕	⊕	⊕	⊕	⊕	⊕	⊕	⊕	⊕
Output contacts																					
n/o contacts	1	1	1	1																	
c/o contacts					1	2	2	2	2	2	2	2	2	2	2	2	2 ⁴⁾	2 ⁴⁾	2 ⁴⁾	2 ⁴⁾	2 ⁴⁾
Indication of operational states																					
LED(s)	1	1	1	1	1	1	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3
Replacement for / conversion table																					
CM-PSS (1SVR 430 784 R2300)							■														
CM-PSS (1SVR 430 784 R3300)								■													
CM-PVS (1SVR 430 794 R1300)									■												
CM-PVS (1SVR 430 794 R3300)										■											
CM-PAS (1SVR 430 774 R1300)											■										
CM-PAS (1SVR 430 774 R3300)												■									
CM-MPS (1SVR 430 885 R1300)													■								
CM-MPS (1SVR 430 885 R3300)														■							
CM-MPS (1SVR 430 884 R1300)															■						
CM-MPS (1SVR 430 884 R3300)																■					

¹⁾ Devices with neutral monitoring are also suitable for monitoring single-phase mains, for example control circuits. For this, all three external conductors L1, L2 and L3 have to be jumpered and connected as one single conductor. If available, phase sequence monitoring has to be deactivated and the threshold value for phase unbalance has to be set to the maximum (25 %).
²⁾ The external conductor voltage towards the neutral conductor is measured.
³⁾ Interrupted neutral monitoring
⁴⁾ Operating mode 1x2 or 2x1 c/o (SPDT) contact can be selected. (2x1 c/o contact is only possible with over- and undervoltage monitoring and is compulsory for automatic phase sequence correction).

Three-phase monitoring relays

CM-PBE and CM-PVE

Ordering details

2



CM-PBE


① R: yellow LED - relay status

The version with neutral monitoring is also suitable for monitoring single-phase mains. For this, all three external conductors (L1, L2, L3) have to be jumpered and connected as one single conductor.


Single- and three-phase monitoring relays for phase failure detection

The **CM-PBE** is used to monitor supply voltages for phase failure ($U_{meas} < 60\% \times U_N$). If all phases (and the neutral) are present, the output relay energizes after the start-up delay t_s is complete. If a phase failure occurs, the tripping delay t_v starts. When timing is complete, the output relay de-energizes. As soon as the voltage returns to the tolerance range, timing of t_s starts. When timing is complete, the output relay re-energizes automatically. The yellow LED glows when the output relay is energized.

Connection diagrams

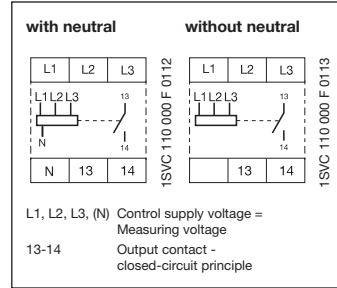

Function diagrams - Three-phase monitoring

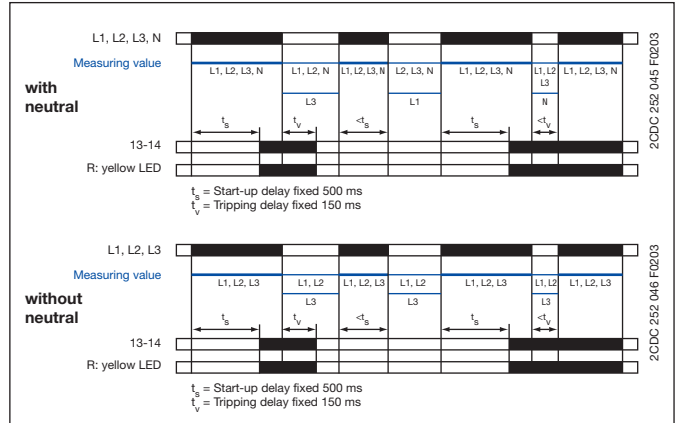

Type	Rated control supply voltage = measuring voltage	Order code	Pack. unit piece	Price 1 piece	Weight 1 piece kg / lb
With neutral monitoring					
CM-PBE	3x380-440 V AC, 220-240 V AC	1SVR 550 881 R9400	1		0.08 / 0.17
Without neutral monitoring					
CM-PBE	3x380-440 V AC	1SVR 550 882 R9500	1		0.08 / 0.17



CM-PVE


① R: yellow LED - relay status

The version with neutral monitoring is also suitable for monitoring single-phase mains. For this, all three external conductors (L1, L2, L3) have to be jumpered and connected as one single conductor.


Single- and three-phase monitoring relays for over- / undervoltage and phase failure detection

The **CM-PVE** is used to monitor supply voltages for over- and undervoltage and phase failure. If all phases (and the neutral) are present with correct voltage, the output relay energizes after the start-up delay t_s is complete. If the voltage exceeds or falls below the fixed threshold value or if a phase failure occurs, the tripping delay t_v starts. When timing is complete, the output relay de-energizes. As soon as the voltage returns to the tolerance range, timing of t_s starts. When timing is complete, the output relay re-energizes automatically. The yellow LED glows when the output relay is energized.

Connection diagrams

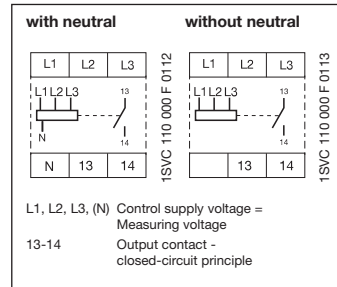

Function diagrams - Three-phase monitoring

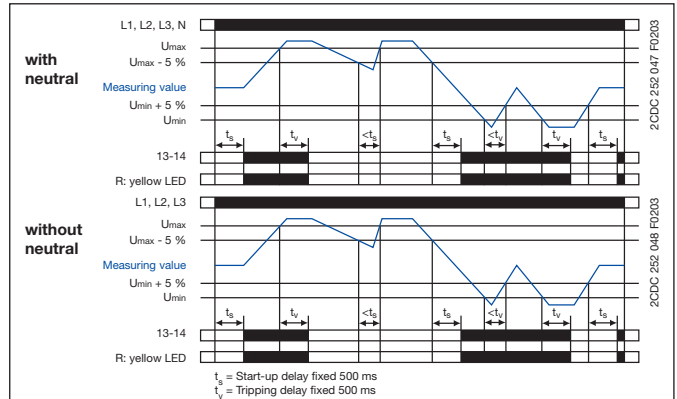

Type	Rated control supply voltage = measuring voltage	Order code	Pack. unit piece	Price 1 piece	Weight 1 piece kg / lb
With neutral monitoring					
CM-PVE	3x320-460 V AC, 185-265 V AC	1SVR 550 870 R9400	1		0.08 / 0.17
Without neutral monitoring					
CM-PVE	3x320-460 V AC	1SVR 550 871 R9500	1		0.08 / 0.17

• Technical data.....86 • Technical diagrams144 • Dimensional drawing145

Three-phase monitoring relays

CM-PFE and CM-PFS

Ordering details



CM-PFE

- ① R: yellow LED - relay status

For applications where a reverse fed voltage > 60% is expected, we recommend to use our three-phase monitoring relays for unbalance CM-PAS.xx.



CM-PFS

- ① R: yellow LED - relay status
- ② Marker label


For applications where a reverse fed voltage > 60% is expected, we recommend to use our three-phase monitoring relays for unbalance CM-PAS.xx.

Three-phase monitoring relays for phase sequence monitoring and phase failure detection


The **CM-PFE** is used to monitor three-phase mains for incorrect phase sequence and phase failure. If all phases are present with the correct phase sequence, the output relay energizes after the start-up delay t_s is complete. If a phase failure or a phase sequence error occurs, the tripping delay t_v starts. When timing is complete, the output relay de-energizes. The yellow LED glows when the output relay is energized.

In case of motors which continue running with only two phases, the CM-PFE detects phase failure if the reverse fed voltage is less than 60 % of the originally applied voltage.

Connection diagram

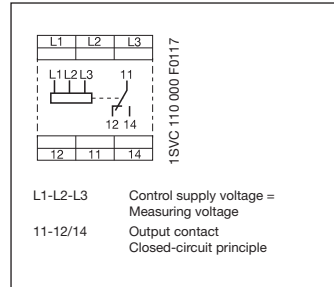

Function diagram

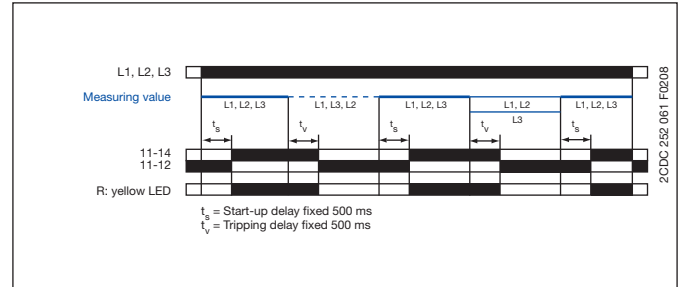


Type	Rated control supply voltage = measuring voltage	Order code	Pack. unit piece	Price 1 piece	Weight 1 piece kg / lb
CM-PFE	3x208-440 V AC	1SVR 550 824 R9100	1		0.08 / 0.17

Three-phase monitoring relays for phase sequence monitoring and phase failure detection


The **CM-PFS** is used to monitor three-phase mains for incorrect phase sequence and phase failure. If all phases are present with the correct phase sequence, the output relay energizes after the start-up delay t_s is complete. If a phase failure or a phase sequence error occurs, the output relay de-energizes instantaneous. The yellow LED glows when the output relay is energized.

In case of motors which continue running with only two phases, the CM-PFS detects phase failure if the reverse fed voltage is less than 60 % of the originally applied voltage.

Connection diagram



Function diagram

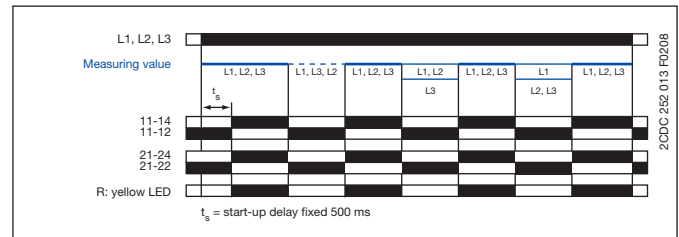

ATTENTION
If several CM-PFS units are placed side by side and the control supply voltage is higher than 415 V, spacing of at least 10 mm has to be kept between the individual units.

Type	Rated control supply voltage = measuring voltage	Order code	Pack. unit piece	Price 1 piece	Weight 1 piece kg / lb
CM-PFS	3x200-500 V AC	1SVR 430 824 R9300	1		0.15 / 0.33


• Technical data.....86	• Dimensional drawing145	• Accessories146
• Technical diagrams144		

New generation

Three-phase monitoring relays CM-PSS.x1 and CM-PVS.x1

Ordering details


2

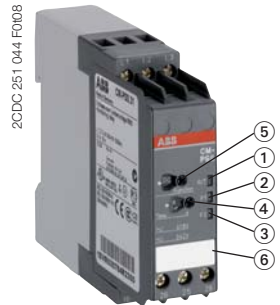

2CDC 251 044 F0b08

CM-PSS.x1

- ① R/T: yellow LED - relay status, timing
- ② F1: red LED - fault message
- ③ F2: red LED - fault message
- ④ Adjustment of the tripping delay t_v
- ⑤ Function selection (see rotary switch "Function")
- ⑥ Marker label

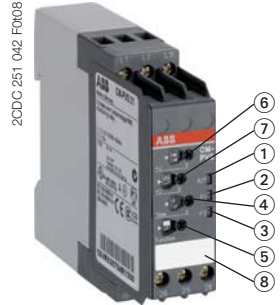

2CDC 251 042 F0b08


CM-PVS.x1

- ① R/T: yellow LED - relay status, timing
- ② F1: red LED - fault message
- ③ F2: red LED - fault message
- ④ Adjustment of the tripping delay t_v
- ⑤ Function selection (see rotary switch "Function")
- ⑥ Adjustment of the threshold value for overvoltage
- ⑦ Adjustment of the threshold value for undervoltage
- ⑧ Marker label


Three-phase monitoring relays for over- and undervoltage with fixed threshold values $\pm 10 \%$

The **CM-PSS.31** and the **CM-PSS.41** are monitoring relays for three-phase mains. They monitor the phase parameters phase sequence, phase failure, over- and undervoltage. The threshold values for over- and undervoltage are fixed.

Connection diagram

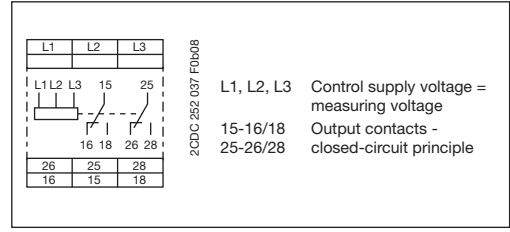

Rotary switch "Function"

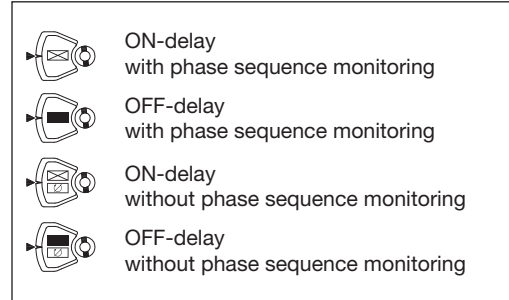


Type	Rated control supply voltage = measuring voltage	Order code	Pack. unit piece	Price 1 piece	Weight 1 piece kg / lb
CM-PSS.31	3x380 V AC	1SVR 630 784 R2300	1		0.13 / 0.29
CM-PSS.41	3x400 V AC	1SVR 630 784 R3300	1		0.13 / 0.29


Three-phase monitoring relays for over- and undervoltage with adjustable threshold values

The **CM-PVS.31** and the **CM-PVS.41** are monitoring relays for three-phase mains. They monitor the phase parameters phase sequence, phase failure, over- and undervoltage. The threshold values for over- and undervoltage are adjustable.

Connection diagram

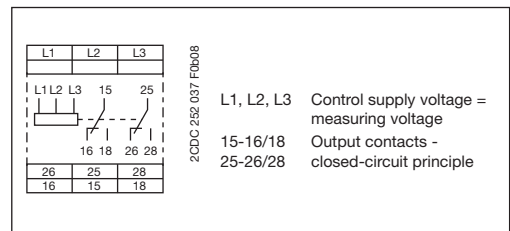

Rotary switch "Function"

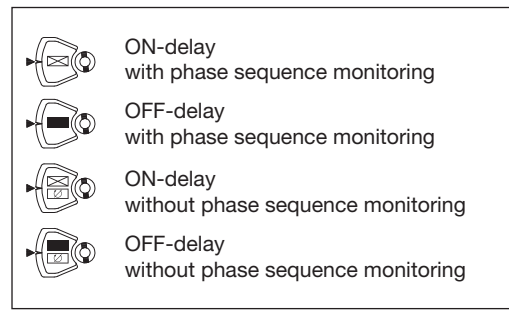


Type	Rated control supply voltage = measuring voltage	Order code	Pack. unit piece	Price 1 piece	Weight 1 piece kg / lb
CM-PVS.31	3x160-300 V AC	1SVR 630 794 R1300	1		0.13 / 0.29
CM-PVS.41	3x300-500 V AC	1SVR 630 794 R3300	1		0.13 / 0.29

• Conversion table	77	• Function diagrams	83	• Technical data	88
• Technical diagrams	144	• Dimensional drawing	145	• Accessories	146

New generation

Three-phase monitoring relays CM-PAS.x1 and CM-MPS.x1

Ordering details




CM-PAS.x1

- ① R/T: yellow LED - relay status, timing
- ② F1: red LED - fault message
- ③ F2: red LED - fault message
- ④ Adjustment of the tripping delay t_v
- ⑤ Adjustment of the threshold value for phase unbalance
- ⑥ Marker label


Three-phase monitoring relays for phase unbalance

The **CM-PAS.31** and the **CM-PAS.41** are monitoring relays for three-phase mains. They monitor the phase parameters phase sequence, phase failure and phase unbalance. The threshold value for phase unbalance is adjustable.

Connection diagram

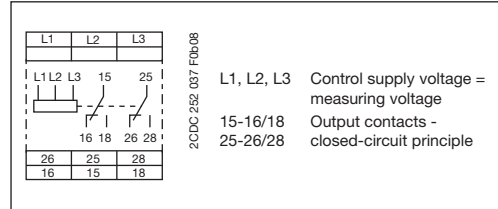

Type	Rated control supply voltage = measuring voltage	Order code	Pack. unit piece	Price 1 piece	Weight 1 piece kg / lb
CM-PAS.31	3x160-300 V AC	1SVR 630 774 R1300	1		0.13 / 0.29
CM-PAS.41	3x300-500 V AC	1SVR 630 774 R3300	1		0.13 / 0.29



CM-MPS.x1


- ① R/T: yellow LED - relay status, timing
- ② F1: red LED - fault message
- ③ F2: red LED - fault message
- ④ Adjustment of the tripping delay t_v
- ⑤ Adjustment of the threshold value for overvoltage
- ⑥ Adjustment of the threshold value for undervoltage
- ⑦ Adjustment of the threshold value for phase unbalance
- ⑧ Function selection (see DIP switch functions) / Marker label

Multifunctional three-phase monitoring relays


The **CM-MPS.x1** are multifunctional monitoring relays for three-phase mains. They monitor the phase parameters phase sequence, phase failure, over- and undervoltage and phase unbalance. CM-MPS.11 and CM-MPS.21 also monitor the neutral for interruption. The threshold values for over- and undervoltage and phase unbalance are adjustable.

i CM-MPS.11 and CM-MPS.21 are also suitable for monitoring single-phase mains. For this, all three external conductors (L1, L2, L3) have to be jumpered and connected as one single conductor. Phase sequence monitoring has to be deactivated and the threshold value for phase unbalance has to be set to the maximum (25 %).

Connection diagram

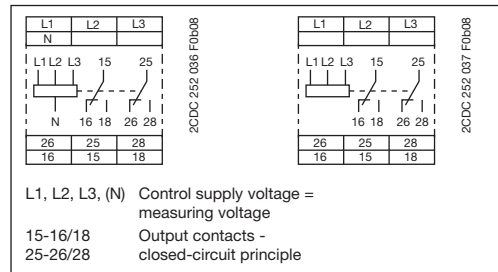

DIP switch functions

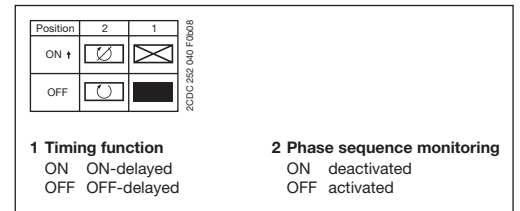

Type	Rated control supply voltage = measuring voltage	Order code	Pack. unit piece	Price 1 piece	Weight 1 piece kg / lb
With interrupted neutral monitoring					
CM-MPS.11	3x90-170 V AC	1SVR 630 885 R1300	1		0.13 / 0.29
CM-MPS.21	3x180-280 V AC	1SVR 630 885 R3300	1		0.13 / 0.29

Without interrupted neutral monitoring					
CM-MPS.31	3x160-300 V AC	1SVR 630 884 R1300	1		0.13 / 0.29
CM-MPS.41	3x300-500 V AC	1SVR 630 884 R4300	1		0.13 / 0.29


• Conversion table77	• Function diagrams83	• Technical data88 and 90
• Technical diagrams144	• Dimensional drawing145	• Accessories146

New generation

Three-phase monitoring relays CM-MPS.x3 and CM-MPN.x2


Ordering details

2



CM-MPS.x3

- ① R/T: yellow LED - relay status, timing
- ② F1: red LED - fault message
- ③ F2: red LED - fault message
- ④ Adjustment of the tripping delay t_t
- ⑤ Adjustment of the threshold value for overvoltage
- ⑥ Adjustment of the threshold value for undervoltage
- ⑦ Adjustment of the threshold value for phase unbalance
- ⑧ Function selection (see DIP switch functions) / Marker label



CM-MPN.x2


- ① R/T: yellow LED - relay status, timing
- ② F1: red LED - fault message
- ③ F2: red LED - fault message
- ④ Adjustment of the tripping delay t_t
- ⑤ Adjustment of the threshold value for overvoltage
- ⑥ Adjustment of the threshold value for undervoltage
- ⑦ Adjustment of the threshold value for phase unbalance
- ⑧ Function selection (see DIP switch functions) / Marker label

Multifunctional three-phase monitoring relays, automatic phase sequence correction and separate monitoring of over- and undervoltage (window monitoring) configurable

The **CM-MPS.x3** are multifunctional monitoring relays for three-phase mains. They monitor the phase parameters phase sequence, phase failure, over- and undervoltage and phase unbalance. CM-MPS.23 also monitors the neutral for interruption. The threshold values for over- and undervoltage and phase unbalance are adjustable.

i The devices can be used for mains with a frequency of 45-440 Hz. CM-MPS.23 is also suitable for monitoring single-phase mains. For this, all three external conductors (L1, L2, L3) have to be jumpered and connected as one single conductor. Phase sequence monitoring has to be deactivated and the threshold value for phase unbalance has to be set to the maximum (25 %).

Connection diagram

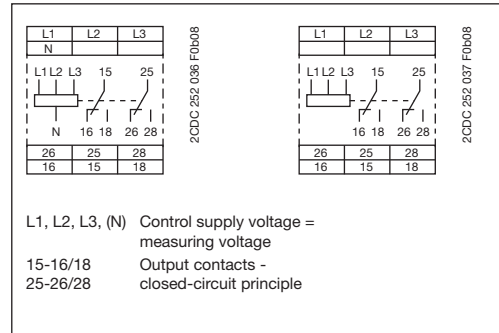

DIP switch functions

Position	4	3	2	1
ON +	(A)	2x1 c/o	(X)	(X)
OFF	(X)	1x2 c/o	(O)	(■)

1 Timing function
ON ON-delayed
OFF OFF-delayed

2 Phase sequence monitoring
ON deactivated
OFF activated

3 Operating principle of output
ON 2x1 c/o contact
OFF 1x2 c/o contacts

4 Phase sequence correction
ON activated
OFF deactivated

¹⁾ Output relay R1 is responsive to overvoltage, output relay R2 is responsive to undervoltage. In case of other faults, both output relays react synchronously.


Type	Rated control supply voltage = measuring voltage	Order code	Pack. unit piece	Price 1 piece	Weight 1 piece kg / lb
------	--	------------	------------------	---------------	------------------------

With interrupted neutral monitoring					
CM-MPS.23	3x180-280 V AC	1SVR 630 885 R4300	1		0.13 / 0.29
Without interrupted neutral monitoring					
CM-MPS.43	3x300-500 V AC	1SVR 630 884 R4300	1		0.13 / 0.29

Multifunctional three-phase monitoring relays, automatic phase sequence correction and separate monitoring of over- and undervoltage (window monitoring) configurable

The **CM-MPN.52**, **CM-MPN.62** and **CM-MPN.72** are multifunctional monitoring relays for three-phase mains. They monitor the phase parameters phase sequence, phase failure, over- and undervoltage and phase unbalance. The threshold values for over- and undervoltage and phase unbalance are adjustable.

Connection diagram

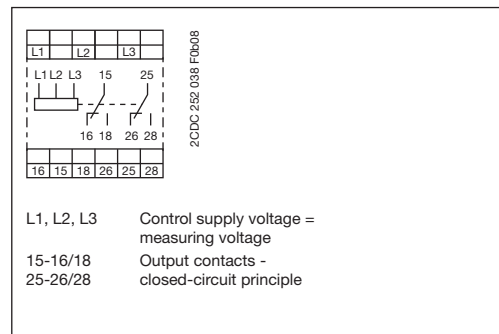

DIP switch functions

Position	4	3	2	1
ON +	(A)	2x1 c/o	(X)	(X)
OFF	(X)	1x2 c/o	(O)	(■)

1 Timing function
ON ON-delayed
OFF OFF-delayed

2 Phase sequence monitoring
ON deactivated
OFF activated

3 Operating principle of output
ON 2x1 c/o contact
OFF 1x2 c/o contacts

4 Phase sequence correction
ON activated
OFF deactivated

¹⁾ Output relay R1 is responsive to overvoltage, output relay R2 is responsive to undervoltage. In case of other faults, both output relays react synchronously.

Type	Rated control supply voltage = measuring voltage	Order code	Pack. unit piece	Price 1 piece	Weight 1 piece kg / lb
CM-MPN.52	3x350-580 V AC	1SVR 650 487 R8300	1		0.13 / 0.29
CM-MPN.62	3x450-720 V AC	1SVR 650 488 R8300	1		0.13 / 0.29
CM-MPN.72	3x530-820 V AC	1SVR 650 489 R8300	1		0.13 / 0.29

• Conversion table77	• Function diagrams83	• Technical data92
• Technical diagrams144	• Dimensional drawing145	• Accessories146

New generation

Three-phase monitoring relays CM-PSS.xx, CM-PVS.xx, CM-PAS.xx and MPx.xx

Function description / -diagrams

Phase sequence and phase failure monitoring CM-PSS.xx, CM-PVS.xx, CM-PAS.xx, CM-MPS.xx, CM-MPN.xx


Applying control supply voltage begins the fixed start-up delay t_s . When t_s is complete and all phases are present with correct voltage, the output relays energize and the yellow LED R/T glows.

Phase sequence monitoring

If phase sequence monitoring is activated, the output relays de-energize as soon as a phase sequence error occurs. The fault is displayed by alternated flashing of the LEDs F1 and F2. The output relays re-energize automatically as soon as the phase sequence is correct again.

Phase failure monitoring

The output relays de-energize instantaneous if a phase failure occurs. The fault is indicated by lightning of LED F1 and flashing of LED F2. The output relays re-energize automatically as soon as the voltage returns to the tolerance range.

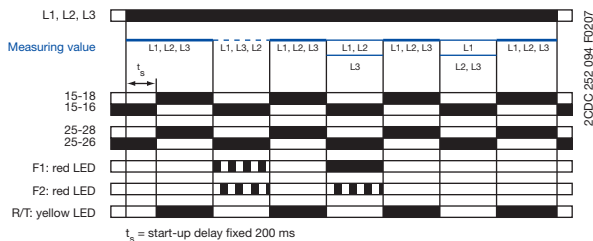


Interrupted neutral monitoring CM-MPS.11, CM-MPS.21, CM-MPS.23

The interruption of the neutral in the main to be monitored is detected by means of phase unbalance evaluation.

Determined by the system, in case of unloaded neutral, i.e. symmetrical load between all three phases, it may happen that an interruption of the neutral will not be detected.

If the star point is displaced by asymmetrical load in the three-phase main, an interrupted neutral will be detected.

Displacement of the star point





Automatic phase sequence correction CM-MPS.x3, CM-MPN.x2

This function can be selected only if phase sequence monitoring is activated and operating mode 2x1 c/o (SPDT) contact $\overline{no/ov}$ is selected.


Applying control supply voltage begins the fixed start-up delay t_{s1} . When t_{s1} is complete and all phases are present with correct voltage, output relay R1 energizes. Output relay R2 energizes when the fixed start-up delay t_{s2} is complete and all phases are present with correct phase sequence. Output relay R2 remains de-energized if the phase sequence is incorrect.

If the voltage to be monitored exceeds or falls below the set threshold values for phase unbalance, over- or undervoltage or if a phase failure occurs, output relay R1 de-energizes and the LEDs F1 and F2 indicate the fault.

Output relay R2 is responsive only to a false phase sequence. In conjunction with a reversing contactor combination, this enables an automatic correction of the rotation direction. See circuit diagrams on the right.

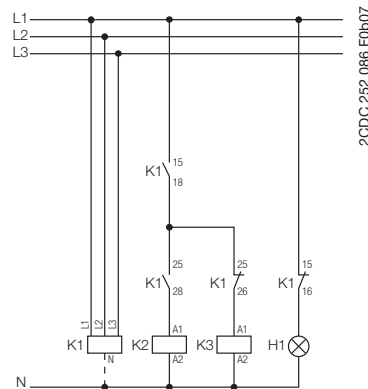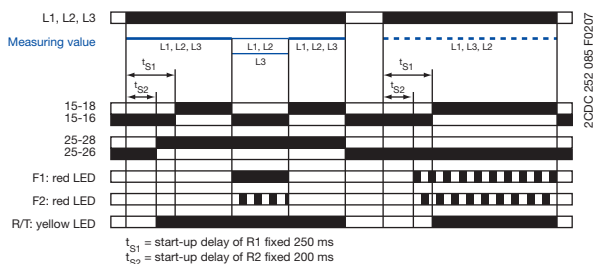

Control circuit diagram (K1 = CM-MPS.xx or CM-MPN.xx)

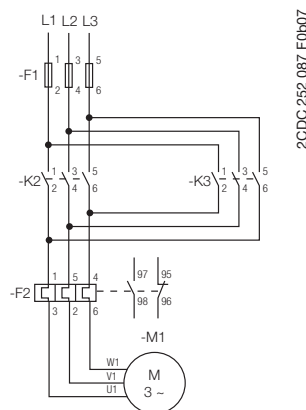

Power circuit diagram

Over- and undervoltage monitoring 1x2 c/o

CM-PSS.xx¹⁾, CM-PVS.xx²⁾, CM-MPS.xx²⁾, CM-MPN.xx²⁾

Applying control supply voltage begins the fixed start-up delay t_s . When t_s is complete and all phases are present with correct voltage and with correct phase sequence, the output relays energize and the yellow LED R/T glows.

Type of tripping delay = ON-delay

If the voltage to be monitored exceeds or falls below the fixed¹⁾ or set²⁾ threshold value, the output relays de-energize after the set tripping delay t_v is complete. The LED R/T flashes during timing and turns off as soon as the output relays de-energize.


The output relays re-energize automatically as soon as the voltage returns to the tolerance range, taking into account a fixed hysteresis of 5 % and the LED R/T glows.

Type of tripping delay = OFF-delay


If the voltage to be monitored exceeds or falls below the fixed¹⁾ or set²⁾ threshold value, the output relays de-energize instantaneously and the LED R/T turns off.

As soon as the voltage returns to the tolerance range, taking into account a fixed hysteresis of 5 %, the output relays re-energize automatically after the set tripping delay t_v is complete. The LED R/T flashes during timing and turns steady when timing is complete.

ON-delay ☒, 1x2 c/o contacts 1x2 c/o

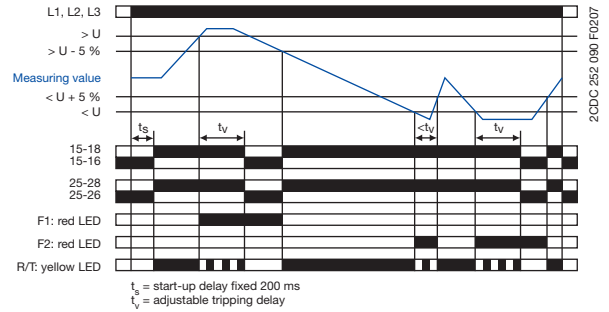

OFF-delay ■, 1x2 c/o contacts 1x2 c/o

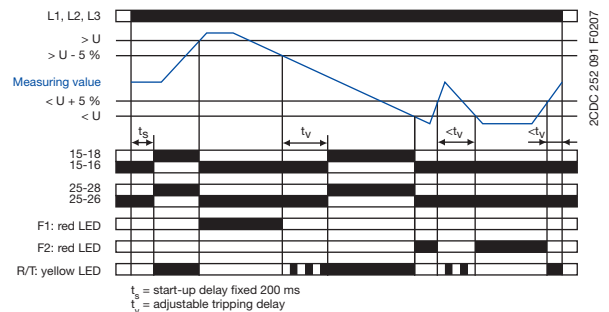

Over- and undervoltage monitoring 2x1 c/o

CM-MPS.x3, CM-MPN.x2

Applying control supply voltage begins the fixed start-up delay t_s . When t_s is complete and all phases are present with correct voltage and with correct phase sequence, the output relays energize. The yellow LED R/T glows as long as at least one output relay is energized.

Type of tripping delay = ON-delay

If the voltage to be monitored exceeds or falls below the set threshold value, output relay R1 (overvoltage) or output relay R2 (undervoltage) de-energizes after the set tripping delay t_v is complete. The LED R/T flashes during timing.


The corresponding output relay re-energizes automatically as soon as the voltage returns to the tolerance range, taking into account a fixed hysteresis of 5 %.

Type of tripping delay = OFF-delay


If the voltage to be monitored exceeds or falls below the set threshold value, output relay R1 (overvoltage) or output relay R2 (undervoltage) de-energizes instantaneously.

As soon as the voltage returns to the tolerance range, taking into account a fixed hysteresis of 5 %, the corresponding output relay re-energizes automatically after the set tripping delay t_v is complete. The LED R/T flashes during timing.

ON-delay ☒, 2x1 c/o contact 2x1 c/o

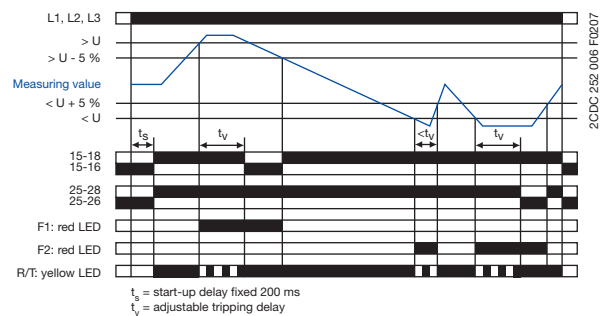

ON-delay ■, 2x1 c/o contact 2x1 c/o

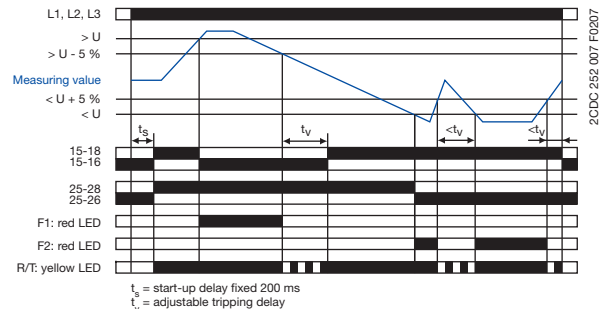

Phase unbalance monitoring

CM-PAS.xx, CM-MPS.xx, CM-MPN.xx

Applying control supply voltage begins the fixed start-up delay t_s . When t_s is complete and all phases are present with correct voltage and with correct phase sequence, the output relays energize and the yellow LED R/T glows.

Type of tripping delay = ON-delay



If the voltage to be monitored exceeds or falls below the set phase unbalance threshold value, the output relays de-energize after the set tripping delay t_v is complete. The LED R/T flashes during timing and turns off as soon as the output relays de-energize.

The output relays re-energize automatically as soon as the voltage returns to the tolerance range, taking into account a fixed hysteresis of 20 % and the LED R/T glows.

Type of tripping delay = OFF-delay

If the voltage to be monitored exceeds or falls below the set phase unbalance threshold value, the output relays de-energize instantaneously and the LED R/T turns off.

As soon as the voltage returns to the tolerance range, taking into account a fixed hysteresis of 20 %, the output relays re-energize automatically after the set tripping delay t_v is complete. The LED R/T flashes during timing and turns steady when timing is complete.

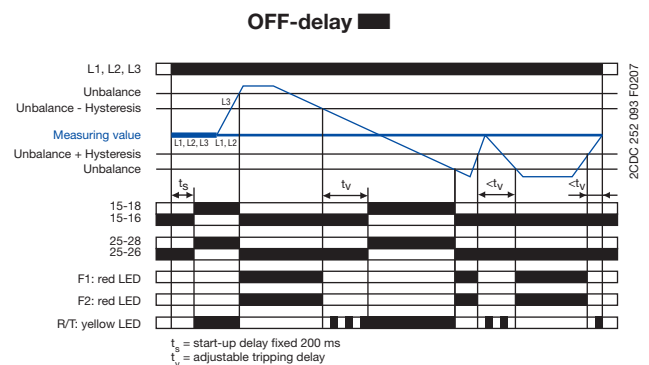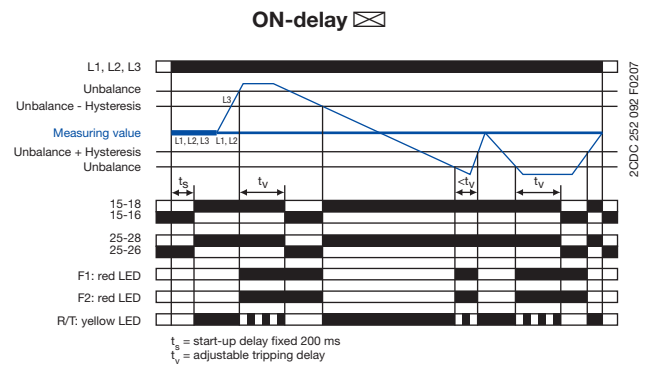

LED functions

CM-PSS.xx, CM-PSV.xx, CM-PAS.xx, CM-MPS.xx, CM-MPN.xx

Function	R/T: yellow LED	F1: red LED	F2: red LED
Control supply voltage applied, output relay energized		-	-
Tripping delay t_v active		-	-
Phase failure	-		
Phase sequence	-		alternating
Overvoltage	-		-
Undervoltage	-	-	
Phase unbalance	-		
Interruption of the neutral	-		
Adjustment error ¹⁾			

¹⁾ Possible misadjustments of the front-face operating controls:

Overlapping of the threshold values: An overlapping of the threshold values is given, if the threshold value for overvoltage is set to a smaller value than the threshold value for undervoltage.

DIP switch 3 = OFF and DIP switch 4 = ON: Automatic phase sequence correction is activated and selected operating mode is 1x2 c/o contacts

DIP switch 2 and 4 = ON: Phase sequence detection is deactivated and the automatic phase sequence correction is activated

Type of tripping delay

CM-PSS.xx, CM-PSV.xx, CM-PAS.xx, CM-MPS.xx, CM-MPN.xx

The type of tripping delay ☒ / ■ can be adjusted via a rotary (CM-PxS.xx) or a DIP switch (CM-MPx.xx).

Switch position ON-delay ☒:

In case of a fault, the de-energizing of the output relays and the respective fault message are suppressed for the adjusted tripping delay t_v .

Switch position OFF-delay ■:

In case of a fault, the output relays de-energize instantaneously and a fault message is displayed and stored for the length of the adjusted tripping delay t_v . Thereby, also momentary undervoltage conditions are recognized.

Three-phase monitoring relays CM-PBE, CM-PVE, CM-PFE and CM-PFS

Technical data

Type	CM-PBE ¹⁾	CM-PBE	CM-PVE ¹⁾	CM-PVE	CM-PFE	CM-PFS
Supply circuit = measuring circuit	L1-L2-L3-N	L1-L2-L3	L1-L2-L3-N	L1-L2-L3	L1-L2-L3	
Rated control supply voltage U_S = measuring voltage	3x380-440 V AC, 220-240 V AC	3x380-440 V AC	3x320-460 V AC, 185-265 V AC	3x320-460 V AC	3x208-440 V AC	3x200-500 V AC
Power consumption						approx. 15 VA
Rated control supply voltage U_S tolerance	-15...+15 %		-15...+10 %		-10...+10 %	-15...+10 %
Rated frequency	50/60 Hz		50/60 Hz (-10...+10 %)			50/60 Hz
Duty time	100 %					
Measuring circuit	L1-L2-L3-N	L1-L2-L3	L1-L2-L3-N	L1-L2-L3	L1-L2-L3	
Monitoring functions						
phase failure	■	■	■	■	■	■
phase sequence	-	-	-	-	■	■
over- / undervoltage	-	-	■	■	-	-
neutral	■	-	■	-	-	-
Measuring ranges	3x380-440 V AC, 220-240 V AC	3x380-440 V AC	3x320-460 V AC, 185-265 V AC	3x320-460 V AC	3x208-440 V AC	3x200-500 V AC
Thresholds	U_{min}	$0.6 \times U_N$	fixed 185 V / 320 V	fixed 320 V	$0.6 \times U_N$	
	U_{max}		fixed 265 V / 460 V	fixed 460 V		
Hysteresis related to the threshold value	fixed 5 % (release value = $0.65 \times U_N$)		fixed 5 %			
Measuring voltage frequency	50/60 Hz (-10 %...+10 %)				50/60 Hz	
Response time	40 ms		80 ms		500 ms	
Measuring error within rated control supply voltage tolerance						≤ 0.5 %
Measuring error within temperature range						≤ 0.06 % / °C
Timing circuit						
Start-up delay t_s	fixed 500 ms (± 20 %)				fixed 500 ms	
Tripping t_v	fixed 150 ms (± 20 %)		at over-/undervoltage fixed 500 ms (± 20 %)		fixed 500 ms	-
Indication of operational states						
Relay status	R: yellow LED	┌───┐ Output relay energized				
Output circuits	13-14				11-12/14	11(15)-12(16)/14(18), 21(25)-22(26)/24(28)
Kind of output	1 n/o contact				1 c/o contact	2 c/o contacts
Operating principle ²⁾	closed-circuit principle					
Contact material	AgCdO					AgNi
Rated voltage (VDE 0110, IEC 60947-1)	250 V					
Minimum switching voltage / Minimum switching current	- / -					
Maximum switching voltage	250 V AC, 250 V DC					
Rated operational current (IEC 60947-5-1)	AC12 (resistive) 230 V	4 A				
	AC15 (inductive) 230 V	3 A				
	DC12 (resistive) 24 V	4 A				
	DC13 (inductive) 24 V	2 A				
Mechanical lifetime	30 x 10 ⁶ switching cycles					
Electrical lifetime (AC12, 230 V, 4 A)	0.1 x 10 ⁶ switching cycles					
Short-circuit proof, max. fuse rating	n/c contact	10 A fast-acting				4 A fast-acting
	n/o contact	10 A fast-acting				6 A fast-acting
AC rating (UL 508)	Utilization category (Control Circuit Rating Code)	B 300				
	max. rated operational voltage	300 V AC				
	max. continuous thermal current at B 300	5 A				
	max. making/breaking apparent power at B 300	3600/360 VA				
General data						
Dimensions (W x H x D)	22.5 x 78 x 78.5 mm (0.89 x 3.07 x 3.09 inch)					22.5 x 78 x 100 mm (0.89 x 3.07 x 3.94 inch)
Mounting position	any					
Degree of protection	enclosure / terminals	IP50 / IP20				
Mounting	DIN rail (EN 50022)					

Three-phase monitoring relays CM-PBE, CM-PVE, CM-PFE and CM-PFS

Technical data



Type	CM-PBE ¹⁾	CM-PBE	CM-PVE ¹⁾	CM-PVE	CM-PFE	CM-PFS
Electrical connection						
Wire size	fine-strand with wire end ferrule					2 x 0.75-2.5 mm ² (2 x 18-14 AWG)
	fine-strand without wire end ferrule					2 x 1-1.5 mm ² (2 x 18-16 AWG)
	rigid					2 x 0.75-1.5 mm ² (2 x 18-16 AWG)
Stripping length						10 mm (0.39 inch)
Tightening torque						7 mm (0.28 inch)
Environmental data						
Ambient temperature range	operation / storage					-20...+60 °C / -40...+85 °C
Environmental testing (IEC 68-2-30)						24 h cycle time, 55 °C, 93 % rel., 96 h
Operational reliability (IEC 68-2-6)						6 g
Mechanical resistance (IEC 68-2-6)						10 g
Isolation data						
Rated insulation volt. between supply, measuring and output circuits (VDE 0110, IEC 60947-1)	400 V			500 V		
Rated impulse withstand voltage U _{imp} between all isolated circuits (VDE 0110, IEC 664)						4 kV / 1.2 - 50 µs
Test voltage between all isolated circuits						2.5 kV, 50 Hz, 1 min.
Pollution category (VDE 0110, IEC 664, IEC 255-5)						3
Overvoltage category (VDE 0110, IEC 664, IEC 255-5)						III
Standards						
Product standard						IEC 255-6, EN 60255-6
Low Voltage Directive						2006/95/EC
EMC Directive						2004/108/EC
Electromagnetic compatibility						
Interference emission						EN 61000-6-2
electrostatic discharge (ESD)	IEC/EN 61000-4-2					Level 3 - 6 kV/ 8 kV
electromagnetic field (HF radiation resistance)	IEC/EN 61000-4-3					Level 3 - 10 V/m
fast transients (Burst)	IEC/EN 61000-4-4					Level 3 - 2 kV / 5 kHz
powerful impulses (Surge)	IEC 1000-4-5, EN 61000-4-5					Level 4 - 2 kV-L
HF line emission	IEC 1000-4-6, EN 61000-4-6					Level 3 - 10 V
Interference emission						EN 61000-6-4

¹⁾ Device with neutral monitoring: The external conductor voltage towards the neutral conductor is measured.

²⁾ Closed-circuit principle: Output relay is de-energized if the measured value exceeds/drops below the adjusted threshold.

**New
generation**

Three-phase monitoring relays CM-PSS.xx, CM-PVS.xx and CM-PAS.xx

Technical data

Data at $T_a = 25\text{ °C}$ and rated values, if nothing else indicated

Type	CM-PSS.31	CM-PSS.41	CM-PVS.31	CM-PVS.41	CM-PAS.31	CM-PAS.41	
Input circuit = Measuring circuit							
L1, L2, L3							
Rated control supply voltage U_s = measuring voltage	3x380 V AC	3x400 V AC	3x160-300 V AC	3x300-500 V AC	3x160-300 V AC	3x300-500 V AC	
Rated control supply voltage U_s tolerance	-15...+10 %						
Rated frequency	50/60 Hz						
Frequency range	45-65 Hz						
Typical current / power consumption	25 mA / 18 VA (380 V AC)	25 mA / 18 VA (400 V AC)	25 mA / 10 VA (230 V AC)	25 mA / 18 VA (400 V AC)	25 mA / 10 VA (230 V AC)	25 mA / 18 VA (400 V AC)	
Measuring circuit							
L1, L2, L3							
Monitoring functions	Phase failure	■	■	■	■	■	
	Phase sequence	can be switched off				■	■
	Automatic phase sequence correction	-	-	-	-	-	-
	Over- / undervoltage	■	■	■	■	-	-
	Phase unbalance	-	-	-	-	■	■
Measuring range	Overvoltage	3x418 V AC	3x440 V AC	3x220-300 V AC	3x420-500 V AC	-	-
	Undervoltage	3x342 V AC	3x360 V AC	3x160-230 V AC	3x300-380 V AC	-	-
	Phase unbalance	-	-	-	-	2-25 % of average of phase voltages	
Thresholds	Overvoltage	fixed		adjust. within meas. range		-	-
	Undervoltage	fixed		adjust. within meas. range		-	-
	Phase unbalance (switch-off value)	-	-	-	-	adjust. within meas. range	
Hysteresis related to the threshold value	Over- / undervoltage	fixed 5 %				-	
	Phase unbalance	-	-	-	-	fixed 20 %	
Rated frequency of the measuring signal	50/60 Hz						
Frequency range of the measuring signal	45-65 Hz						
Maximum measuring cycle time	100 ms						
Measuring error within the rated control supply voltage tolerance	$\leq 0.5\%$						
Measuring error within the temperature range	$\leq 0.06\%$ / °C						
Measuring method	True RMS						
Timing circuit							
Start-up delay t_s	fixed 200 ms						
Tripping delay t_v	ON- or OFF-delay 0; 0.1-30 s adjustable				ON- delay 0; 0.1-30 s adjustable		
Timing error within the rated control supply voltage tolerance	$\leq 0.5\%$						
Timing error within the temperature range	$\leq 0.06\%$ / °C						
Indication of operational states	Details see function description / -diagrams						
Output circuits							
15-16/18, 25-26/28							
Kind of output	2x1 c/o contacts (Relays)						
Operating principle ¹⁾	closed-circuit principle						
Contact material	AgNi alloy, Cd free						
Rated voltage (VDE 0110, IEC 60947-1)	250 V						
Minimum switching power	24 V / 10 mA						
Maximum switching voltage	see load limit curve						
Rated operational current (IEC/EN 60947-5-1)	AC12 (resistive) 230 V					4 A	
	AC15 (inductive) 230 V					3 A	
	DC12 (resistive) 24 V					4 A	
	DC13 (inductive) 24 V					2 A	
AC rating (UL 508)	Utilization category (Control Circuit Rating Code)					B 300	
	max. rated operational voltage					300 V AC	
	max. continuous thermal current at B 300					5 A	
	max. making/breaking apparent power at B 300					3600/360 VA	

**New
generation**

Three-phase monitoring relays CM-PSS.xx, CM-PVS.xx and CM-PAS.xx Technical data

Data at $T_a = 25\text{ °C}$ and rated values, if nothing else indicated

Type	CM-PSS.31	CM-PSS.41	CM-PVS.31	CM-PVS.41	CM-PAS.31	CM-PAS.41
Mechanical lifetime	30 x 10 ⁶ switching cycles					
Electrical lifetime (AC12, 230 V, 4 A)	0,1 x 10 ⁶ switching cycles					
Short-circuit proof, n/c contact	6 A fast-acting					
maximum fuse rating, n/o contact	10 A fast-acting					
General data						
Duty time	100 %					
Repeat accuracy (constant parameters)	< ±0.2 %					
Dimensions (W x H x D)	22.5 x 78 x 100 mm (0.89 x 3.07 x 3.94 inch)					
Weight	0.13 kg (0.29 lb)					
Mounting	DIN rail (EN 60715), snap-on mounting without any tool					
Mounting position	any					
Minimum distance to other units	horizontal / vertical		none / none			
Degree of protection	enclosure / terminals		IP50 / IP20			
Electrical connection						
Wire size	fine-strand with(out) wire end ferrule		2 x 0.75-2.5 mm ² (2 x 18-14 AWG)			
	rigid		2 x 0.5-4 mm ² (2 x 20-12 AWG)			
Stripping length	7 mm (0.28 inch)					
Tightening torque	0.6-0.8 Nm					
Environmental data						
Ambient temperature ranges	operation / storage		-25...+60 °C / -40...+85 °C			
Damp heat (IEC 60068-2-30)	55 °C, 6 cycles					
Climatic category	3K3					
Vibration (sinusoidal) (IEC/EN 60255-21-1)	Class 2					
Shock (IEC/EN 60266-21-2)	Class 2					
Isolation data						
Rated insulation voltage U_i	input circuit / output circuit		600 V			
	output circuit 1 / output circuit 2		300 V			
Rated impulse withstand voltage U_{imp} (VDE 0110, IEC/EN 60664)	input circuit		6 kV; 1.2/50 µs			
	output circuit		4 kV; 1.2/50 µs			
Test voltage between all isolated circuits (type test)	2.5 kV, 50 Hz, 1 s					
Basis isolation	input circuit / output circuit		600 V			
Protective separation (VDE 0160 part 101 and 101/A, IEC/EN 61140)	input circuit / output circuit		-			
Pollution degree (VDE 0110, IEC/EN 60664, UL 508)	3					
Overvoltage category (VDE 0110, IEC 60664, UL 508)	III					
Standards						
Product standard	IEC/EN 60255-6, EN 50178					
Low Voltage Directive	2006/95/EG					
EMC directive	2004/108/EG					
RoHS directive	2002/95/EG					
Electromagnetic compatibility						
Interference immunity	EN 61000-6-1, EN 61000-6-2					
electrostatic discharge (ESD)	IEC/EN 61000-4-2		Level 3 (6 kV / 8 kV)			
electromagnetic field (HF radiation resistance)	IEC/EN 61000-4-3		Level 3 (10 V/m)			
fast transients (Burst)	IEC/EN 61000-4-4		Level 3 (2 kV / 2 kHz)			
powerful impulses (Surge)	IEC/EN 61000-4-5		Level 4 (2 kV L-L)			
HF line emission	IEC/EN 61000-4-6		Level 3 (10 V)			
Resistance to harmonics	EN 61000-4-13		Class 3			
Interference emission	EN 61000-6-3, EN 61000-6-4					
electromagn. field (HF radiation resistance)	IEC/CISPR 22, EN 50022		Class B			
HF line emission	IEC/CISPR 22, EN 50022		Class B			

¹⁾ Closed-circuit principle: Output relay(s) de-energize(s) if measured value exceeds or falls below the adjusted threshold value

• Approvals62



**New
generation**

Three-phase monitoring relays CM-MPS.x1 Technical data

Data at $T_a = 25\text{ °C}$ and rated values, if nothing else indicated

Type	CM-MPS.11	CM-MPS.21	CM-MPS.31	CM-MPS.41
Input circuit = Measuring circuit	L1, L2, L3, N		L1, L2, L3	
Rated control supply voltage $U_s =$ measuring voltage	3x90-170 V AC	3x180-280 V AC	3x160-300 V AC	3x300-500 V AC
Rated control supply voltage U_s tolerance	-15...+10 %			
Rated frequency	50/60 Hz			
Frequency range	45-65 Hz			
Typical current / power consumption	25 mA / 10 VA (115 V AC)	25 mA / 18 VA (230 V AC)	25 mA / 10 VA (230 V AC)	25 mA / 18 VA (400 V AC)
Measuring circuit	L1, L2, L3, N		L1, L2, L3	
Monitoring functions	Phase failure	■	■	■
	Phase sequence	can be switched off		
	Automatic phase sequence correction	-	-	-
	Over- / undervoltage	■	■	■
	Phase unbalance	■	■	■
	Interrupted neutral	■	■	-
Measuring range	Overvoltage	3x120-170 V AC	3x240-280 V AC	3x220-300 V AC
	Undervoltage	3x90-130 V AC	3x180-220 V AC	3x160-230 V AC
	Phase unbalance	2-25 % of average of phase voltages		
Thresholds	Overvoltage	adjustable within measuring range		
	Undervoltage	adjustable within measuring range		
	Phase unbalance (switch-off value)	adjustable within measuring range		
Hysteresis related to the threshold value	Over- / undervoltage	fixed 5 %		
	Phase unbalance	fixed 20 %		
Rated frequency of the measuring signal	50/60 Hz			
Frequency range of the measuring signal	45-65 Hz			
Maximum measuring cycle time	100 ms			
Measuring error within the rated control supply voltage tolerance	$\leq 0.5\%$			
Measuring error within the temperature range	$\leq 0.06\% / \text{°C}$			
Measuring method	True RMS			
Timing circuit				
Start-up delay t_s	fixed 200 ms			
Tripping delay t_v	ON- or OFF-delay 0; 0.1-30 s adjustable			
Timing error within the rated control supply voltage tolerance	$\leq 0.5\%$			
Timing error within the temperature range	$\leq 0.06\% / \text{°C}$			
Indication of operational states	Details see function description / -diagrams			
Output circuits	15-16/18, 25-26/28			
Kind of output	1x2 c/o contacts (Relays)			
Operating principle ¹⁾	closed-circuit principle			
Contact material	AgNi alloy, Cd free			
Rated voltage (VDE 0110, IEC 60947-1)	250 V			
Minimum switching power	24 V / 10 mA			
Maximum switching voltage	see load limit curve			
Rated operational current (IEC/EN 60947-5-1)	AC12 (resistive) 230 V	4 A		
	AC15 (inductive) 230 V	3 A		
	DC12 (resistive) 24 V	4 A		
	DC13 (inductive) 24 V	2 A		
AC rating (UL 508)	Utilization category (Control Circuit Rating Code)	B 300		
	max. rated operational voltage	300 V AC		
	max. continuous thermal current at B 300	5 A		
	max. making/breaking apparent power at B 300	3600/360 VA		

**New
generation**

Three-phase monitoring relays CM-MPS.x1 Technical data

Data at $T_a = 25\text{ °C}$ and rated values, if nothing else indicated

Type	CM-MPS.11	CM-MPS.21	CM-MPS.31	CM-MPS.41
Mechanical lifetime	30 x 10 ⁶ switching cycles			
Electrical lifetime (AC12, 230 V, 4 A)	0,1 x 10 ⁶ switching cycles			
Short-circuit proof,	n/c contact		6 A fast-acting	
maximum fuse rating	n/o contact		10 A fast-acting	
General data				
Duty time	100 %			
Repeat accuracy (constant parameters)	< ±0.2 %			
Dimensions (W x H x D)	22.5 x 78 x 100 mm (0.89 x 3.07 x 3.94 inch)			
Weight	0.14 kg (0.31 lb)		0.13 kg (0.29 lb)	
Mounting	DIN rail (EN 60715), snap-on mounting without any tool			
Mounting position	any			
Minimum distance to other units	horizontal / vertical		none / none	
Degree of protection	enclosure / terminals		IP50 / IP20	
Electrical connection				
Wire size	fine-strand with(out) wire end ferrule		2 x 0.75-2.5 mm ² (2 x 18-14 AWG)	
	rigid		2 x 0.5-4 mm ² (2 x 20-12 AWG)	
Stripping length	7 mm (0.28 inch)			
Tightening torque	0.6-0.8 Nm			
Environmental data				
Ambient temperature ranges	operation / storage		-25...+60 °C / -40...+85 °C	
Damp heat (IEC 60068-2-30)	55 °C, 6 cycles			
Climatic category	3K3			
Vibration (sinusoidal) (IEC/EN 60255-21-1)	Class 2			
Shock (IEC/EN 60266-21-2)	Class 2			
Isolation data				
Rated insulation voltage U _i	input circuit / output circuit		600 V	
	output circuit 1 / output circuit 2		300 V	
Rated impulse withstand voltage U _{imp} (VDE 0110, IEC/EN 60664)	input circuit		6 kV; 1.2/50 µs	
	output circuit		4 kV; 1.2/50 µs	
Test voltage between all isolated circuits (type test)	2.5 kV, 50 Hz, 1 s			
Basis isolation	input circuit / output circuit		600 V	
Protective separation (VDE 0160 part 101 and 101/A, IEC/EN 61140)	input circuit / output circuit		yes -	
Pollution degree (VDE 0110, IEC/EN 60664, UL 508)	3			
Overvoltage category (VDE 0110, IEC 60664, UL 508)	III			
Standards				
Product standard	IEC/EN 60255-6, EN 50178			
Low Voltage Directive	2006/95/EG			
EMC directive	2004/108/EG			
RoHS directive	2002/95/EG			
Electromagnetic compatibility				
Interference immunity	EN 61000-6-1, EN 61000-6-2			
electrostatic discharge (ESD)	IEC/EN 61000-4-2		Level 3 (6 kV / 8 kV)	
electromagnetic field (HF radiation resistance)	IEC/EN 61000-4-3		Level 3 (10 V/m)	
fast transients (Burst)	IEC/EN 61000-4-4		Level 3 (2 kV / 2 kHz)	
powerful impulses (Surge)	IEC/EN 61000-4-5		Level 4 (2 kV L-N) Level 4 (2 kV L-L)	
HF line emission	IEC/EN 61000-4-6		Level 3 (10 V)	
Resistance to harmonics	EN 61000-4-13		Class 3	
Interference emission	EN 61000-6-3, EN 61000-6-4			
electromagn. field (HF radiation resistance)	IEC/CISPR 22, EN 50022		Class B	
HF line emission	IEC/CISPR 22, EN 50022		Class B	

¹⁾ Closed-circuit principle: Output relay(s) de-energize(s) if measured value exceeds or falls below the adjusted threshold value



**New
generation**

Three-phase monitoring relays CM-MPS.x3 and CM-MPN.x2

Technical data

Data at $T_a = 25\text{ °C}$ and rated values, if nothing else indicated

Type	CM-MPS.23	CM-MPS.43	CM-MPN.52	CM-MPN.62	CM-MPN.72
Input circuit = Measuring circuit	L1, L2, L3, N		L1, L2, L3		
Rated control supply voltage $U_s =$ measuring voltage	3x180-280 V AC	3x300-500 V AC	3x350-580 V AC	3x450-720 V AC	3x530-820 V AC
Rated control supply voltage U_s tolerance	-15...+10 %				
Rated frequency	50/60/400 Hz		50/60 Hz		
Frequency range	45-440 Hz		45-65 Hz		
Typical current / power consumption	5 mA / 4 VA (230 V AC)	5 mA / 4 VA (400 V AC)	29 mA / 41 VA (480 V AC)	29 mA / 52 VA (600 V AC)	29 mA / 59 VA (690 V AC)
Measuring circuit	L1, L2, L3, N		L1, L2, L3		
Monitoring functions	Phase failure				
	■	■	■	■	■
	Phase sequence				
	can be switched off				
	Automatic phase sequence correction				
	configurable				
	Over- / undervoltage				
	■	■	■	■	■
	Phase unbalance				
	■	■	■	■	■
	Interrupted neutral				
	■	-	-	-	-
Measuring range	Overvoltage				
	3x240-280 V AC	3x420-500 V AC	3x480-580 V AC	3x600-720 V AC	3x690-820 V AC
	Undervoltage				
	3x180-220 V AC	3x300-380 V AC	3x350-460 V AC	3x450-570 V AC	3x530-660 V AC
	Phase unbalance				
	2-25 % of average of phase voltages				
Thresholds	Overvoltage				
	adjustable within measuring range				
	Undervoltage				
	adjustable within measuring range				
	Phase unbalance (switch-off value)				
	adjustable within measuring range				
Hysteresis related to the threshold value	Over- / undervoltage				
	fixed 5 %				
	Phase unbalance				
	fixed 20 %				
Rated frequency of the measuring signal	50/60/400 Hz		50/60 Hz		
Frequency range of the measuring signal	45-440 Hz		45-65 Hz		
Maximum measuring cycle time	100 ms				
Measuring error within the rated control supply voltage tolerance	$\leq 0.5\%$				
Measuring error within the temperature range	$\leq 0.06\%$ / °C				
Measuring method	True RMS				
Timing circuit					
Start-up delay t_s and t_{s2}	fixed 200 ms				
Start-up delay t_{s1}	fixed 250 ms				
Tripping delay t_v	ON- or OFF-delay 0; 0.1-30 s adjustable			ON-delay 0; 0.1-30 s adjustable	
Timing error within the rated control supply voltage tolerance	$\leq 0.5\%$				
Timing error within the temperature range	$\leq 0.06\%$ / °C				
Indication of operational states	Details see function description / -diagrams				
Output circuits	15-16/18, 25-26/28				
Kind of output	2x1 or 1x2 c/o contacts configurable (Relays)				
Operating principle ¹⁾	closed-circuit principle				
Contact material	AgNi alloy, Cd free				
Rated voltage (VDE 0110, IEC 60947-1)	250 V				
Minimum switching power	24 V / 10 mA				
Maximum switching voltage	see load limit curve				
Rated operational current (IEC/EN 60947-5-1)	AC12 (resistive) 230 V		4 A		
	AC15 (inductive) 230 V		3 A		
	DC12 (resistive) 24 V		4 A		
	DC13 (inductive) 24 V		2 A		
AC rating (UL 508)	Utilization category (Control Circuit Rating Code)		B 300		
	max. rated operational voltage		300 V AC		
	max. continuous thermal current at B 300		5 A		
	max. making/breaking apparent power at B 300		3600/360 VA		

New generation

Three-phase monitoring relays CM-MPS.x3 and CM-MPN.x2

Technical data

Data at $T_a = 25\text{ °C}$ and rated values, if nothing else indicated

Type	CM-MPS.23	CM-MPS.43	CM-MPN.52	CM-MPN.62	CM-MPN.72
Mechanical lifetime	30 x 10 ⁶ switching cycles				
Electrical lifetime (AC12, 230 V, 4 A)	0,1 x 10 ⁶ switching cycles				
Short-circuit proof,	n/c contact		6 A fast-acting		
maximum fuse rating	n/o contact		10 A fast-acting		
General data					
Duty time	100 %				
Repeat accuracy (constant parameters)	< ±0.2 %				
Dimensions (W x H x D)	22.5 x 78 x 100 mm (0.89 x 3.07 x 3.94 inch)		45 x 78 x 100 mm (1.78 x 3.07 x 3.94 inch)		
Weight	0.14 kg (0.31 lb)	0.13 kg (0.29 lb)	0.22 kg (0.49 lb)		
Mounting	DIN rail (EN 60715), snap-on mounting without any tool				
Mounting position	any				
Minimum distance to other units	horizontal / vertical		none / none		
Degree of protection	enclosure / terminals		IP50 / IP20		
Electrical connection					
Wire size	fine-strand with(out) wire end ferrule		2 x 0.75-2.5 mm ² (2 x 18-14 AWG)		
	rigid		2 x 0.5-4 mm ² (2 x 20-12 AWG)		
Stripping length	7 mm (0.28 inch)				
Tightening torque	0.6-0.8 Nm				
Environmental data					
Ambient temperature ranges	operation / storage		-25...+60 °C / -40...+85 °C		
Damp heat (IEC 60068-2-30)	55 °C, 6 cycles				
Climatic category	3K3				
Vibration (sinusoidal) (IEC/EN 60255-21-1)	Class 2				
Shock (IEC/EN 60266-21-2)	Class 2				
Isolation data					
Rated insulation	input circuit / output circuit		600 V		1000 V
voltage U_i	output circuit 1 / output circuit 2		300 V		
Rated impulse withstand voltage U_{imp}	input circuit		6 kV; 1.2/50 µs		8 kV; 1.2/50 µs
(VDE 0110, IEC/EN 60664)	output circuit		4 kV; 1.2/50 µs		
Test voltage	isolated output circuits		2.5 kV, 50 Hz, 1 s		
(type test) between	input circuit and isolated output circuits		2.5 kV, 50 Hz, 1 s		4 kV, 50 Hz, 1 s
Basis isolation	input circuit / output circuit		600 V		1000 V
Protective separation (VDE 0160 part 101 and 101/A, IEC/EN 61140)	input circuit / output circuit		-		
Pollution degree (VDE 0110, IEC/EN 60664, UL 508)	3				
Overvoltage category (VDE 0110, IEC 60664, UL 508)	III				
Standards					
Product standard	IEC/EN 60255-6, EN 50178				
Low Voltage Directive	2006/95/EG				
EMC directive	2004/108/EG				
RoHS directive	2002/95/EG				
Electromagnetic compatibility					
Interference immunity	EN 61000-6-1, EN 61000-6-2				
electrostatic discharge (ESD)	IEC/EN 61000-4-2		Level 3 (6 kV / 8 kV)		
electromagnetic field (HF radiation resistance)	IEC/EN 61000-4-3		Level 3 (10 V/m)		
fast transients (Burst)	IEC/EN 61000-4-4		Level 3 (2 kV / 2 kHz)		
powerful impulses (Surge)	IEC/EN 61000-4-5		Level 4 (2 kV L-N)	Level 4 (2 kV L-L)	
HF line emission	IEC/EN 61000-4-6		Level 3 (10 V)		
Resistance to harmonics	EN 61000-4-13		Class 3		
Interference emission	EN 61000-6-3, EN 61000-6-4				
electromagn. field (HF radiation resistance)	IEC/CISPR 22, EN 50022		Class B		
HF line emission	IEC/CISPR 22, EN 50022		Class B		


¹⁾ Closed-circuit principle: Output relay(s) de-energize(s) if measured value exceeds or falls below the adjusted threshold value

• Approvals62



Notes

2

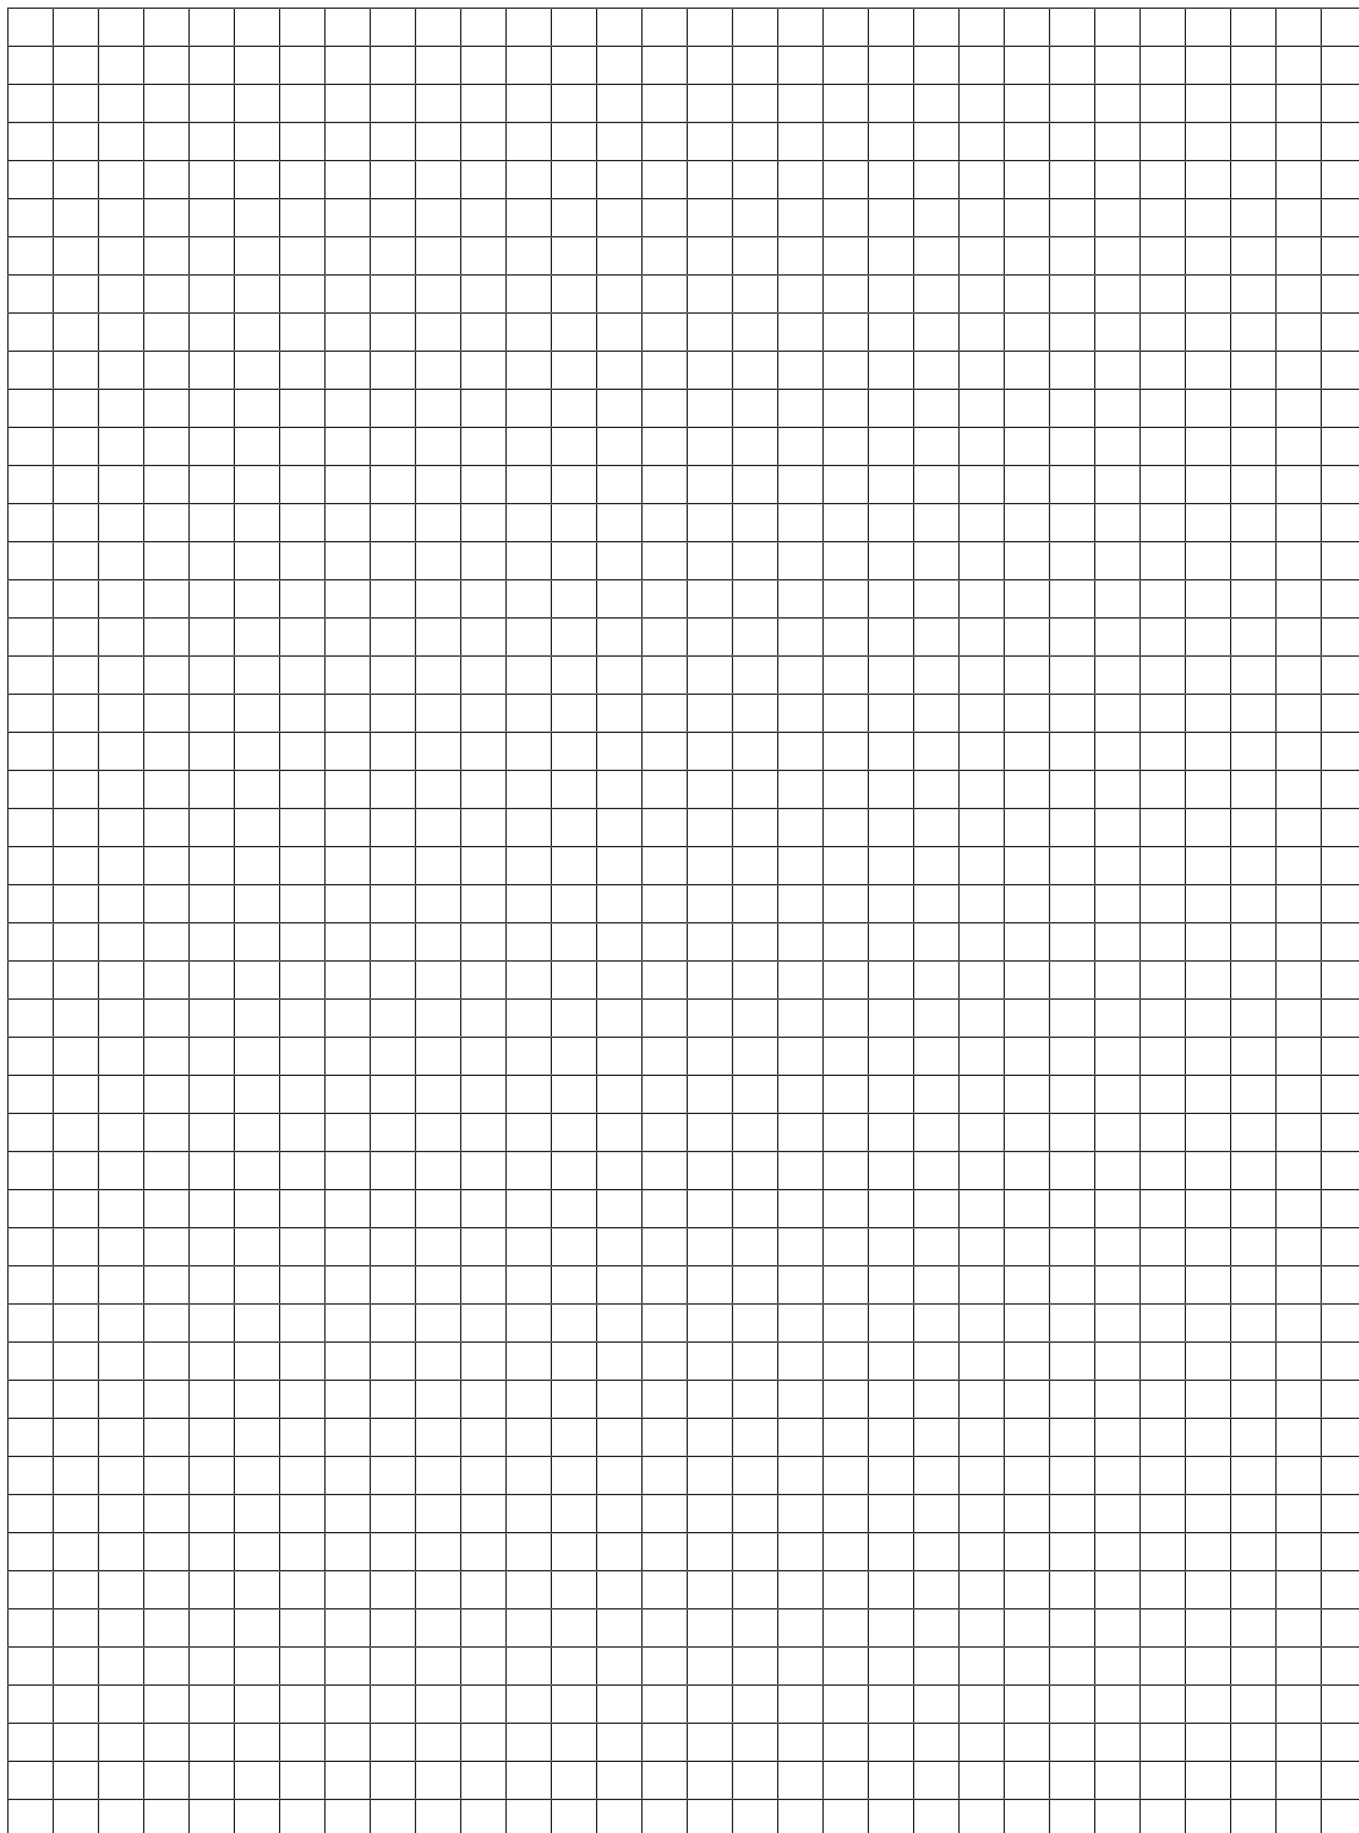



Insulation monitors for ungrounded supply mains

Content

Insulation monitoring in IT systems.....	96
Ordering details	
CM-IWM.....	97
C558.....	99
Technical data	
CM-IWM.....	102
C558.....	103
Approvals and marks	62
Technical diagrams.....	144
Dimensional drawings	145
Accessories	146

Insulation monitors for ungrounded supply mains

Insulation monitoring in IT systems

Overview, Application and connection examples

The IT system with additional equipotential bonding and insulation monitoring equipment

The IT system is supplied either by an isolation transformer or an independent voltage source, such as a battery or a generator.

In this system no active conductor is directly connected to earth potential. The advantage of this is that only a small fault current can flow in case of an insulation fault. This current is essentially caused by the system's leakage capacitance.


The system's fuse does not respond, thus maintaining the voltage supply and therefore operation even in case of a phase-to-earth fault.

The high reliability of an IT system is guaranteed thanks to continuous insulation monitoring.

The insulation monitoring device recognizes insulation faults as they develop, and immediately reports that the value has fallen below the minimum. This prevents operational interruptions caused by a second more severe insulation fault.

The following illustration shows the typical arrangement of an IT system.


In IT-N systems the secondary side star point of the transformer is additionally used as neutral.

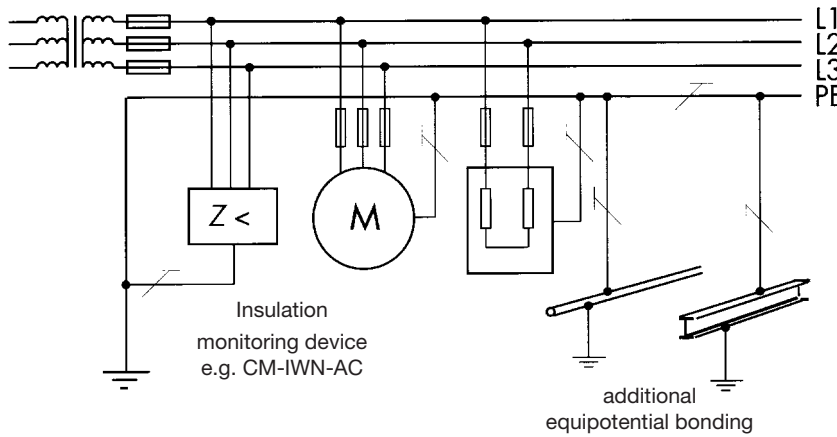


2CDC 252 028 F 0003

Application and connection examples for the CM-IWN AC in IT and IT-N systems


Three-phase IT-N system

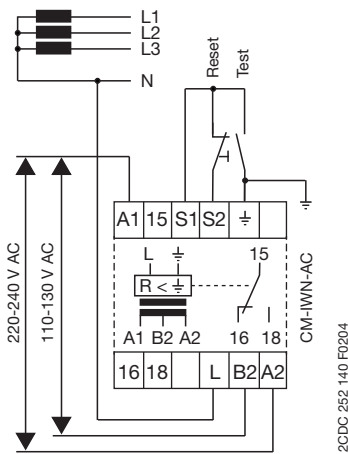

Single-phase IT-N system

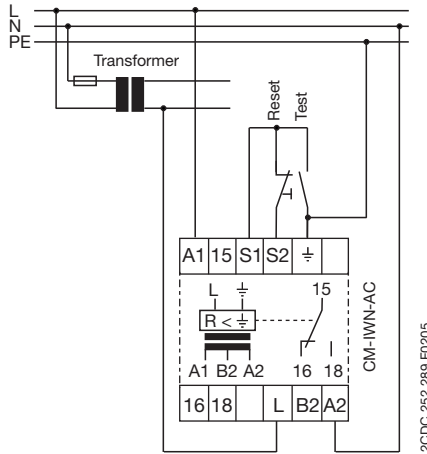

Three-phase IT system

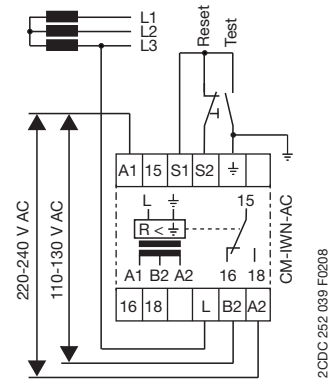

Insulation monitors for ungrounded AC mains

CM-IWN-AC

Ordering details




CM-IWN-AC

- ① Range selector switch
- ② Response threshold 1-110 kΩ
- ③ U: green LED - control supply voltage
- ④ F: red LED - relay status
- ⑤ Test button: "Test/Reset"
- ⑥ Marker label

- 2 measuring ranges from 1-110 kΩ
- Tripping storage
- Suitable for insulation monitoring of single- and three-phase ungrounded AC systems
- Functional test by means of front-face test button or via remote test button
- VDE 0413/T.2
- 1 c/o contact, open-circuit principle
- 2 LED for status indication

Tripping time



The **CM-IWN-AC** is used to monitor the insulation resistance of single-phase or three-phase AC supply voltages. It is primarily used to monitor auxiliary circuits that are electrically isolated from ground. The CM-IWN-AC monitors the insulation resistance between ungrounded AC supply voltages and the protective earth conductors. A superimposed DC measuring voltage is used for measurement. The CM-IWN-AC is designed for insulation resistances to be monitored from 1 to 110 kΩ, divided into two ranges. The desired range is selected with a front-mounted switch.

The output relay is energized and the LED lights up as soon as the insulation resistance R_x falls below the threshold value. The relay is reset (de-energized) automatically if the measured insulation resistance exceeds 1.6 times the threshold value.


An earth-leakage fault can be simulated using the front-mounted "Test" button. A remote test button can be connected via the terminals S1- \ominus . Tripping is caused by closing a n/o contact.

By jumpering the terminals S1-S2, fault tripping can be stored. Remote reset can be implemented by connecting a pushbutton to S1-S2. Pressing the button then resets storage of the tripped state.


Attention!

The CM-IWN-AC is designed for AC supply voltages. Rectifiers, that are connected in series, should be electrically isolated from the measuring relay.

Function diagram CM-IWN-AC

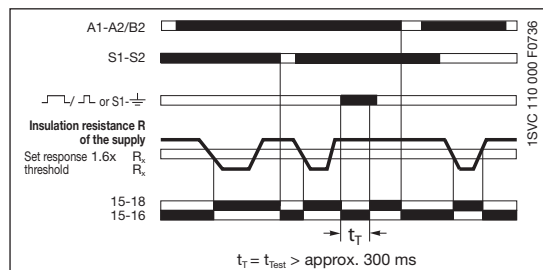


Connection diagram CM-IWN-AC

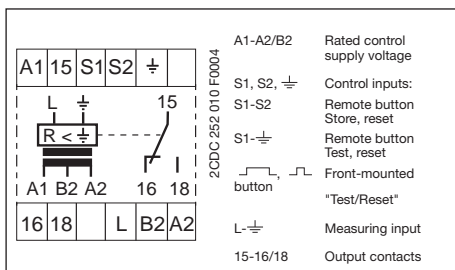

Type	Rated control supply voltage	Order code	Pack. unit pieces	Price 1 piece	Weight 1 piece kg / lb
CM-IWN-AC	24-240 V AC/DC	1SVR 450 075 R0000	1		0.30 / 0.66
	110-130 V, 220-240 V AC	1SVR 450 071 R0000	1		0.30 / 0.66


Operating principle

The control supply voltage is feeded via terminals A1-A2/ B2. This can be the voltage supplied from the system to be monitored. The CM-IWN superimposes DC-voltage on the system to be monitored via the terminals L and \ominus (one phase or, if available, the neutral). In case of earth-leakage the resistance of the system against earth potential changes. The resulting earth-leakage current overcomes the insulation resistance ($< \infty$). If this earth-leakage current exceeds the adjusted response threshold, the output relay is energized with delay (see characteristic) and the red "fault" LED lights up.

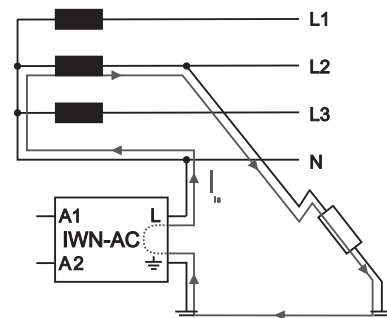

Fields of application

The insulation resistance monitor CM-IWN-AC is mainly used in industrial applications with electrically insulated AC systems for the measurement of an occurring first isolation fault. This can prevent the installation from incorrect operation caused by a possible second isolation fault. The resistances R1 and R2 correspond to two subsequent isolated faults (see drawing). In this case, the resistances are connected in series related to earth potential which would prevent contactor K2 from being de-energized (fault!) although auxiliary contact K1 is open. This incorrect operation may cause considerable faults within the installation.




• Technical data102	• Dimensional drawings145	• Accessories146
• Technical diagrams144		

Insulation monitor for ungrounded DC mains

CM-IWN-DC

Ordering details



CM-IWN-DC

- ① Selector switch
 open circuit principle
 closed circuit principle
- ② Response threshold
 1-110 kΩ
- ③ U: green LED -
 control supply voltage
- ④ L+: red LED -
 fault insulation resistance
- ⑤ L-: red LED -
 fault insulation resistance
- ⑥ Test button: "Test L+/Reset"
- ⑦ Test button: "Test L-"
- ⑧ Marker label

The **CM-IWN-DC** is designed for insulation resistance monitoring in ungrounded, pure DC supply systems with or without filtering. Due to its electrical isolation between the supply circuit and the measuring circuit, it can be supplied either by an external auxiliary voltage or by the supply voltage to be monitored. The CM-IWN-DC is mainly used to monitor DC auxiliary circuits that are electrically isolated from primary supply voltage circuits as well as installations powered by batteries.

Insulation resistance faults are evaluated separately for L+ or L- and displayed by LEDs. Due to its measuring principle, the CM-IWN-DC is not able to detect balanced earth-leakage faults.


The response threshold is adjustable in a range from 10-110 kΩ. If the insulation resistance falls below the set response threshold, the relay is energized and the error LED lights up.

Front-face test button "Test L-": insulation fault can be simulated, pressing the test button = output relay will trip (energize, de-energize)


Front-face test button "Test \square /Reset \square L+": Pressed < 1 s = Test L+, Pressed > 1 s = Reset L+ and L-

Connection S2-S3: jumper = fault tripping is stored, button with n/o contact = remote reset, pressing the button resets storage of the tripped state

Function diagram CM-IWN-DC

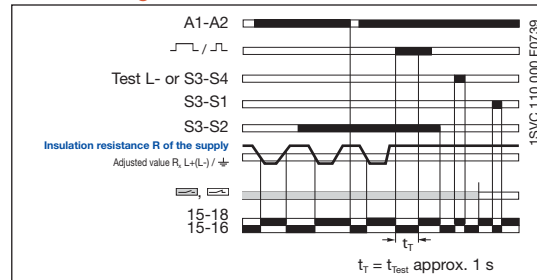


Connection diagram CM-IWN-DC

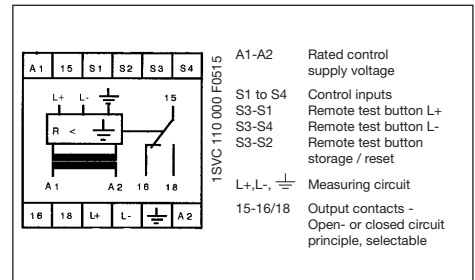

Type	Rated control supply voltage	Order code	Pack. unit pieces	Price 1 piece	Weight 1 piece kg / lb
CM-IWN-DC	24-240 V AC/DC	1SVR 450 065 R0000	1		0.30 / 0.66

Application and connection example

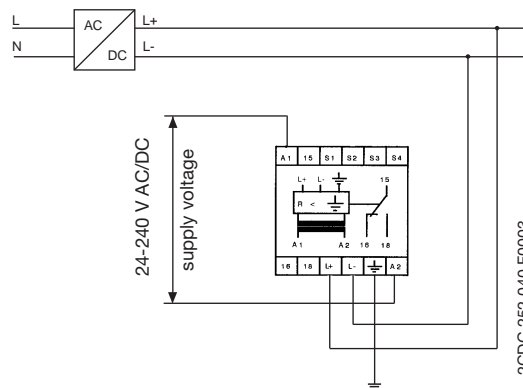

- Insulation resistance monitoring in ungrounded pure DC systems from 24-240 V DC
- Continuously adjustable measuring range 10-110 kΩ
- Front-face selector switch for open- or closed-circuit principle
- Front-face and external test-reset feature
- 1 c/o contact
- 3 LEDs for status indication

• Technical data102	• Dimensional drawings145	• Accessories146
• Technical diagrams144		

Insulation monitors for ungrounded mixed AC/DC systems

C558.01

Ordering details

Enclosure width 45 mm



C558.01

Insulation monitoring device for AC IT systems with DC components and for DC IT systems

Modern control voltage systems frequently contain DC components and high system leakage capacitances due to interference suppression arrangements. These circumstances must be taken into account when selecting the insulation monitoring device.

The C558.01 guarantees reliable insulation monitoring of modern systems. Pure AC systems, pure DC systems as well as AC/DC systems can be monitored.

Fields of application

- Industrial control systems
- Automation systems
- Machine control systems
- Control systems in power plants and power supply companies
- Computer networks
- Mobile generators
- Elevator control systems
- Lighting systems

Measuring principle


The C558.01 operates with a variant of a pulse measuring principle. This measuring principle ensures reliable monitoring of modern control voltage systems. The frequency range of the system to be monitored may extend from 15-400 Hz.

Standards

The C558.01 complies with the standards DIN 57413 T8 / VDE 0413 T8, IEC 61557-8, EN 61557-8 and ASTM F1669M-96.

When installing the device, the safety instructions supplied with the equipment have to be observed!


Measuring time

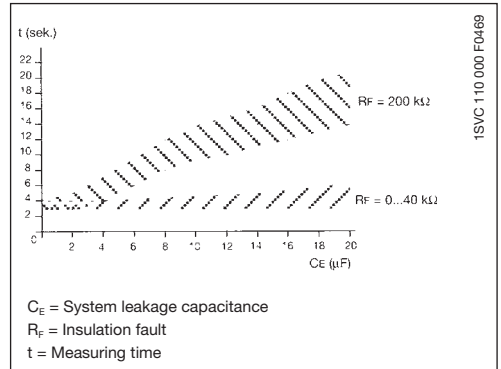

Fault Indications

Indication	Alarm LED		Alarm relay
	+	-	
AC fault	[Symbol]	[Symbol]	[Symbol]
DC fault L+	[Symbol]	[Symbol]	[Symbol]
DC fault L-	[Symbol]	[Symbol]	[Symbol]
Interruption \neq/KE or L1/L2	[Symbol]	[Symbol]	[Symbol]

Connection diagram C558.01

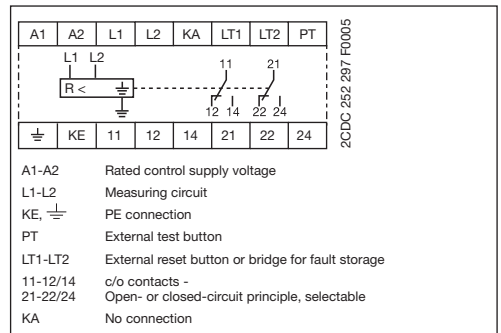

- Insulation monitoring of AC, DC and AC/DC IT systems
- Voltage ranges up to 300 V AC and 300 V DC
- Automatic adaptation to the supply system conditions
- Connection monitoring
- Adjustable response threshold 10-200 k Ω
- Combined test and reset button
- Selection between open- and closed-circuit principle
- Fault storage selectable
- Sealable enclosure
- 2 c/o contacts
- 3 LEDs for status indication

Response values and measuring circuit

Type	Response value R_{an}	Response time ¹⁾	Meas. voltage	Meas. current	Internal-resistance ²⁾	Rated system voltage
C558.01	10-200 k Ω	5 s	13 V	0.1 mA	120/94 k Ω	DC 0-300 V and AC 15-400 Hz 0-300 V

¹⁾ Response times at 1 μF system leakage capacitance

²⁾ DC internal resistance / impedance

Type	Rated control supply voltage U_C	Order code	Pack unit pieces	Price 1 piece	Weight 1 piece kg / lb
C558.01	230 V AC	1SAR 470 020 R0005	1		0.40 / 0.88
C558.01	90-132 V AC	1SAR 470 020 R0004	1		0.40 / 0.88

• Technical data103 • Dimensional drawings145

Insulation monitors for ungrounded AC systems

C558.02

Ordering details

Enclosure width 99 mm



C558.02

- Insulation monitoring of ungrounded single-phase and three-phase AC IT systems up to 793 V
- Adjustable threshold 1-200 kΩ
- Combined test and reset button
- Connection monitoring
- Selection between open- and closed-circuit principle
- Fault storage selectable
- Sealable enclosure
- Connection of external meter possible
- 2 c/o contacts
- LED bar graph indicator
- LEDs for status indication

Insulation monitor for AC IT systems

The standard power supply system is a pure AC system. It neither contains converters nor DC components. The leakage capacitance is relatively low, i.e. usually it is below 1 μF, sometimes slightly above this value.

The C558.02 can be used to monitor such systems with voltages of up to 793 V. The response threshold can be adjusted in a wide range, selectable from 1-20 kΩ or 10-200 kΩ.

Field of application

- Single-phase and three-phase AC systems without DC components
- Uncontrolled motor drives
- Building installation
- Simple machine drives
- Generating sets, mobile generators
- Power supply for public arenas
- Lighting systems
- Air ventilation and air conditioning systems

Measuring principle

Superimposed DC voltage with reversing stage.

Selecting the adjustment range

Changing the setting range from x 1 kΩ to x 10 kΩ, automatically changes the indication of the kΩ values on the LED bar graph indicator:

Range x 1 kΩ: Meter scale point x 1 kΩ.

Range x 10 kΩ: Meter scale point has to be multiplied by 10.

Standards

The C558.02 complies with the standards DIN 57413 Bl.2 / VDE 0413 T2, IEC 61557-8, EN 61557-8 and ASTM F1207-89.


When installing the device, the safety instructions supplied with the equipment have to be observed!

Response delay

Type	*) Response time in time range of 10-200 kΩ	*) Response time in the range of 1-20 kΩ	Max. system leakage capacitance
C558.02	< 1 s	< 3 s	20 μF

*) Response times acc. to IEC 61557-8 at $R_F = 0.5 \times R_{an}$ and 1 μF system leakage capacitance.


Connection diagram C558.02

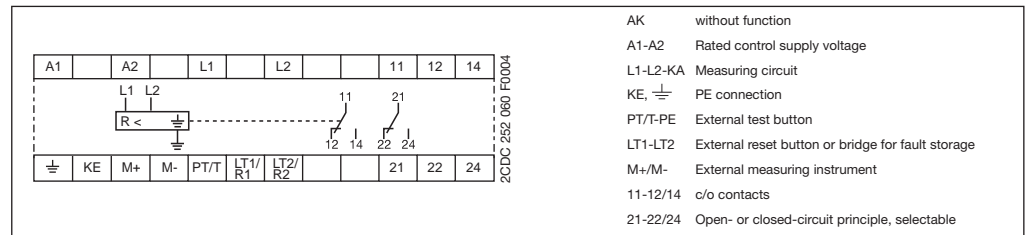

Type	Rated control supply voltage U_C	Order code	Pack unit piece	Price 1 piece	Weight 1 piece kg / lb
C558.02	230 V AC	1SAR 471 020 R0005	1		0.35 / 0.77
C558.02	90-132 V AC	1SAR 471 020 R0004	1		0.35 / 0.77

Accessories (external kΩ meter)

C558.10		1SAR 477 000 R0100	1		0.20 / 0.44
---------	--	--------------------	---	--	-------------



C558.10

• Technical data103 • Dimensional drawings145

Insulation monitors for ungrounded AC and DC systems

C558.03


Ordering details

Enclosure width 99 mm



C558.03

- Insulation monitoring of AC, DC and AC/DC IT systems
- Connection monitoring
- Alarm or system fault indication selectable
- AMP measuring method (applied for EP)
- Automatic adaptation to the power system
- 2 continuously adjustable response thresholds 2-50 kΩ and 20-500 kΩ
- Combined test and reset button
- Selection between open- and closed-circuit principle
- Fault storage selectable
- Sealable enclosure acc. to VDE 0106 T 101
- Environmental conditions comply with EN 50155
- 2 x 1 c/o contact
- LED bar graph indicator
- LEDs for status indication



C558.10

Insulation monitor for AC and DC IT systems

The C558.03 monitors the insulation resistance of IT systems (ungrounded systems) with voltages of up to 690 V AC or 400 V DC. It can be universally used in AC, DC or mixed power systems. Measurement is not influenced by interference suppression measures and capacitances of up to 20µF to earth which are caused by long supply lines. The implemented AMP measuring method guarantees reliable insulation monitoring even in power systems with fixed frequency converters (output and input frequency are static).

Application in modern control voltage systems

- Industrial control systems
- Automation systems
- Machine control systems
- Control systems in power plants and power supply companies
- Computer networks
- Mobile generators
- Elevator control systems
- Lighting systems

Measuring principle

Superimposed DC voltage with reversing stage.

Fault indications

Indication	Alarm LED		Alarm relay
	+	-	
AC fault			
DC fault L+			
DC fault L-			
Interruption ≠/KE or L1/L2			

Standards

The C558.03 complies with the standards DIN 57413 Bl.2 / VDE 0413 T2, IEC 61557-8, EN 61557-8 and ASTM F1207-89.


When installing the device, the safety instructions supplied with the equipment have to be observed!

Response delay

Type	*) Response time in the range of 2-6 kΩ	*) Response time in the range of 6-500 kΩ	Max. system leakage capacitance
C 558.03	< 8-35 s	< 8-12 s	50 µF

*) Response times acc. to IEC 61557-8 at $R_F = 0.5 \times R_{an}$ and 1 µF system leakage capacitance.

Connection diagram C558.03

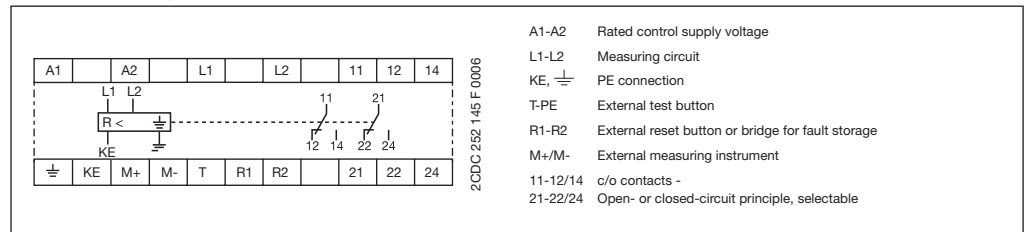

Type	Rated control supply voltage U _c	Order code	Pack. unit piece	Price 1 piece	Weight 1 piece kg / lb
C558.03	230 V AC	1SAR 472 020 R0005	1		0.40 / 0.88
C558.03	90-132 V AC	1SAR 472 020 R0004	1		0.40 / 0.88

Accessories (external kΩ meter)

C558.10	1SAR 477 000 R0100	1		0.20 / 0.44
---------	--------------------	---	--	-------------

• Technical data103 • Dimensional drawings145

Insulation monitors for ungrounded supply mains CM-IWN-AC, CM-IWN-DC

Technical data

Type		CM-IWN-AC	CM-IWN-DC
Supply circuit			
Rated control supply voltage U_s - power consumption	A1-A2	24-240 V AC/DC - approx. 8 VA / 2 W	24-240 V AC/DC - approx. 8 VA / 2 W
	A1-B2	110-130 V AC - approx. 3 VA	
	A1-A2	220-240 V AC - approx. 3 VA	
Rated control supply voltage U_s tolerance		-15 %...+10 %	
Rated frequency	AC/DC versions	15-400 Hz or DC	
	AC versions	50-60 Hz	
Duty time		100 %	
Measuring circuit			
		L-PE	
Monitoring function	Insulation monitoring within electrically isolated	AC systems	DC systems
Measuring range, threshold value	min-max.	1-11 k Ω , 10-110 k Ω	10-110 k Ω
Internal resistance	min.	57 k Ω	-
AC internal resistance	min.	100 k Ω	-
DC internal resistance	min.	100 k Ω	-
Test resistance		820 Ω	-
Max. voltage at the measuring input	max.	415 V AC	300 V DC
Measuring DC voltage	max.	30 V DC	24-240 V DC
Cable length for reset-test button	max.	10 m	
Delay time		refer to ordering details page	<1 s if insulation <0.9 x response threshold
Indication of operational states			
Control supply voltage		U: green LED	
Insulation fault		F: red LED	L+: red LED, L-: red LED
Output circuits			
		15-16/18	
Kind of output		1 c/o contacts	
Operational principle ¹⁾		open-circuit principle	open- or closed circuit principle selectable
Contact material		AgCdO	
Rated voltage (VDE 0110, IEC 664-1, IEC 60947-1)		250 V	
Minimum switching voltage / minimum switching current		- / -	
Maximum switching voltage		400 V AC, 300 V DC	
Rated operational current (IEC 60947-5-1, EN 60947-5-1)	AC12 (resistive) 230 V	5 A	
	AC15 (inductive) 230 V	3 A	
	DC12 (resistive) 24 V	5 A	
	DC13 (inductive) 24 V	2 A	
AC rating (UL 508)	Utilization category (Control Circuit Rating Code)	B 300	
	max. rated operational voltage	300 V AC	
	max. continuous thermal current at B 300	5 A	
	max. making/breaking apparent power at B 300	3600/360 VA	
Mechanical lifetime		30 x 10 ⁶ switching cycles	
Electrical lifetime	at AC12, 230 V, 4 A	0,1 x 10 ⁶ switching cycles	
Short circuit proof, max. fuse rating	n/c contact / n/o contact	4 A fast-acting / 6 A fast-acting	
General data			
Dimensions (W x H x D)		45 x 78 x 100 mm (1.77 x 3.07 x 3.94 in)	
Weight		approx. 0,3 kg (0.66 lb)	
Mounting position		any	
Degree of protection	enclosure / terminals	IP50 / IP20	
Ambient temperature range	operation / storage	-25...+65 °C / -40...+85 °C	
Mounting		DIN rail (EN 50022)	
Electrical connection			
Wire size	fine-strand with wire end ferrule	2 x 2.5 mm ² (2 x14 AWG)	
Standards			
Product standards		IEC 255-6, EN 60255-6	
Low Voltage Directive		2006/95/EC	
EMC Directives		2004/108/EC, 91/263/EEC, 92/31/EEC, 93/68/EEC, 93/67/EEC	
Electromagnetic compatibility		EN 61000-6-2, EN 61000-6-4	
electrostatic discharge (ESD)	IEC/EN 61000-4-2	Level 3 (6 kV / 8 kV)	
electromagnetic field (HF radiation resistance)	IEC/EN 61000-4-3	Level 3 (10(3)V/m)	
fast transients (Burst)	IEC/EN 61000-4-4	Level 3 (2(1) kV / 5 kHz)	
powerful impulses (Surge)	IEC 1000-4-5, EN 61000-4-5	Level 3 (2(1) kV L-L)	
HF line emission	IEC 1000-4-6, EN 61000-4-6	Level 3 (10(3) V)	
Operational reliability (IEC 68-2-6)		5 g	
Mechanical resistance (IEC 68-2-6)		10 g	
Environmental testing (IEC 68-2-30)		24 h cycle time, 55 °C, 93 % rel., 96 h	
Isolation data			
Rating (HD 625.1 S1, VDE 0110, IEC 664-1, IEC 60255-5)		250 V	
Rated insulation voltage between supply, meas. and output circuits		4 kV / 1.2 - 50 μ s	
Rated impulse withstand voltage between all isolated circuits		2.5 kV, 50 Hz, 1 min.	
Test voltage between all isolated circuits		3	
Pollution category		III	
Overvoltage category		III	

¹⁾ Open-circuit principle: Output relay is energized if the measured value exceeds/drops below the adjusted threshold.
Closed-circuit principle: Output relay is de-energized if the measured value exceeds/drops below the adjusted threshold.

• Approvals62

Insulation monitors for ungrounded supply mains C558

Technical data

2

Type	C558.01	C558.02	C558.03
Supply circuit			
Rated control supply voltage U_S - power consumption	A1-A2	115 V AC - 3 VA	
	A1-A2	230 V AC - 3 VA	
Rated control supply voltage U_S tolerance		-20...+15 %	
Rated frequency		15-400 Hz	
Duty time		100 %	
Measuring circuit			
Monitoring function	Insulation monitoring within electrically isolated AC and DC supply systems		
Measuring range, threshold value	min-max.	10-200 k Ω	2-500 k Ω
AC internal resistance	min.	94 k Ω	180 k Ω
DC internal resistance	min.	120 k Ω	200 k Ω
Test resistance		-	
Insulation voltage (L-PE)	max.	290 V DC, 300 V AC	630 V
Measuring voltage / current	max.	13 V / 0.47 mA	20 V / 100 μ A
Cable length for reset-test button LT1-LT2	max.	-	
Delay time	max.	5 s	8-35 s
Indication of operational states			
Control supply voltage		ON: green LED	
Isolation fault (IEC 1557-8, EN 60557-8, ASTM F-25.10.11)		"+": red LED, "-": red LED	
Output circuits			
Kind of output		2 c/o contacts	2x1 c/o contacts
Operational principle ¹⁾		open- or closed-circuit principle selectable	
Contact material		-	
Rated voltage (VDE 0110, IEC 664-1, IEC 60947-1)		250 V AC / 300 V DC	
Minimum switching voltage / minimum switching current		- / -	
Maximum switching voltage		-	
Rated switching current (IEC 60947-5-1, EN 60947-5-1)	AC12 (resistive) 230 V AC15 (inductive) 230 V DC12 (resistive) 24 V DC13 (inductive) 24 V	5 A 2 A 5 A 0.2 A	
Mechanical lifetime		-	
Electrical lifetime	at AC12, 230 V, 4 A	1.2 x10 ⁴ switching cycles	
Short circuit proof, max. fuse rating	n/c contact n/o contact	-	
General data			
Dimensions (W x H x D)	45 x 74 x 105 mm (1.77 x 2.91 x 4.13 in)	99 x 73 x 70 mm (3.9 x 2.87 x 2.76 in)	
Weight	approx. 0.35 kg (0.77 lb)	approx. 0.4 kg (0.88 lb)	approx. 0.35 kg (0.77 lb)
Mounting position		any	
Degree of protection	enclosure / terminals	IP 30 / IP 20	
Ambient temperature range	operation storage	-10...+55 °C -40...+70 °C	
Mounting		DIN rail (EN 50022)	
Electrical connection			
Wire size	fine-strand with wire end ferrule rigid	0.2-2.5 mm ² (24-14 AWG) 0.2-4 mm ² (24-12 AWG)	
Standards			
Product standard			
Low Voltage Directive		2006/95/EC	
EMC Directive		2004/108/EC	
Electromagnetic compatibility		EN 61000-6-2, EN 61000-6-4	
electrostatic discharge (ESD)	IEC/EN 61000-4-2	Level 3 (6 kV / 8 kV)	
electromagnetic field (HF radiation resistance)	IEC/EN 61000-4-3	Level 3 (10(3) V/m)	
fast transients (Burst)	IEC/EN 61000-4-4	Level 3 (2(1) kV / 5 kHz)	
powerful impulses (Surge)	IEC 1000-4-5, EN 61000-4-5	Level 2	
HF line emission	IEC 1000-4-6, EN 61000-4-6	Level 3 (10(3) V)	
Vibration resistance (IEC 68-2-6)		10-150 Hz / 0.15 mm - 2 g	
Operational reliability (IEC 68-2-27, IEC 68-2-29)			
Environmental testing (IEC 68-2-30)			
Isolation data			
Rating (HD 625.1 S1, VDE 0110, IEC 664-1, IEC 60255-5)			
Rated insulation voltage between supply, meas. and output circuits	250 V	690 V	630 V
Rated impulse withstand voltage between all isolated circuits	4 kV / 1.2-50 μ s	6 kV / 1.2-50 μ s	
Test voltage between all isolated circuits	2 kV	3 kV	
Pollution category		3	
Overvoltage category		-	

¹⁾ Open-circuit principle: Output relay is energized if the measured value exceeds/drops below the adjusted threshold.
 Closed-circuit principle: Output relay is de-energized if the measured value exceeds/drops below the adjusted threshold.

Content

Fields of application	106
Ordering details	107
Technical data	108
Approvals and marks	62
Technical diagrams.....	144
Dimensional drawings	145
Accessories	146
Current transformers	147

Motor load monitors

Fields of application


The motor load monitor monitors the load states of single-phase and three-phase asynchronous motors. The evaluation of the phase angle between current and voltage allows a very precise monitoring of the load states.

Compared with other conventional measuring principles (e.g. pressure transducers, current measurement), $\cos \varphi$ monitoring is a more precise and economical alternative. The motor is used as a sensor for its own load status.


Main applications

- Pump monitoring
 - Dry-running protection (underload)
 - Closed valves (overload)
 - Pipe break (overload)
- Heating, air-conditioning, ventilation
 - Monitoring of filter pollution
 - V-belt breakage (underload)
 - Closed shutters/valves (overload)
 - Air ventilating volume
- Agitating machines
 - High consistency within the tank (overload)
 - Pollution of the tank (overload)
- Transport/Conveyance
 - Congested conveyor belts (overload)
 - Jamming of belts (overload)
 - Material accumulation in spiral conveyors (overload)
 - Lifting platforms
- Machine installation
 - Wear of tools, e.g. worn saw blades in circular saws, etc. (overload)
 - Tool breakage (underload)
 - V-belt drives (breakage underload)



Pump control

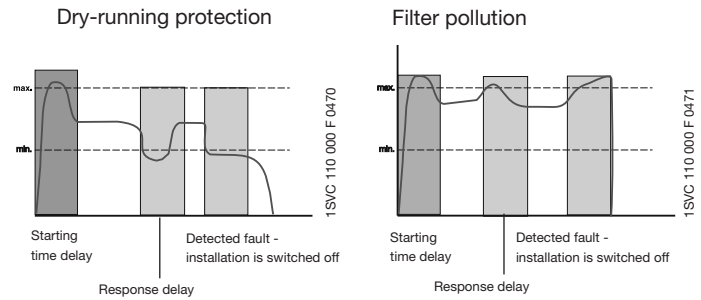





Ventilator monitoring

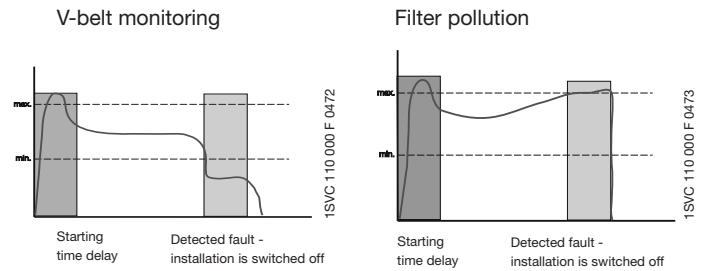

Wiring examples (for motor currents ≤ 20 A)

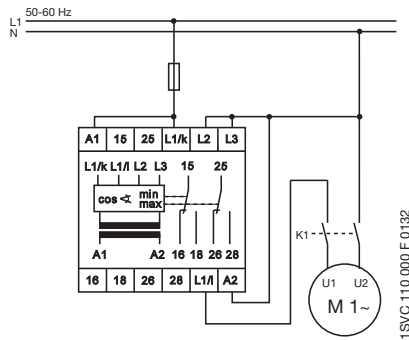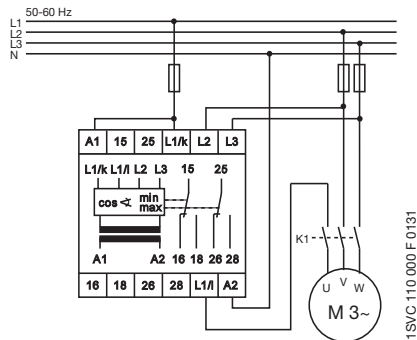

Wiring examples (for motor currents ≥ 20 A)

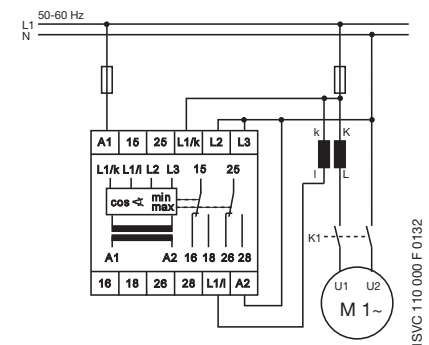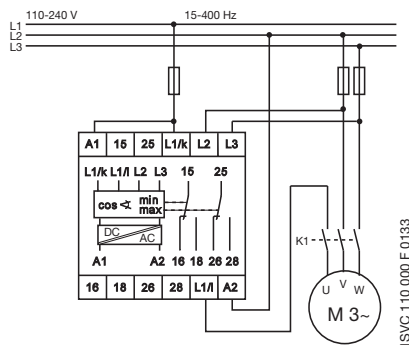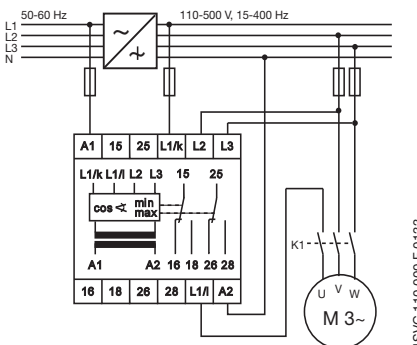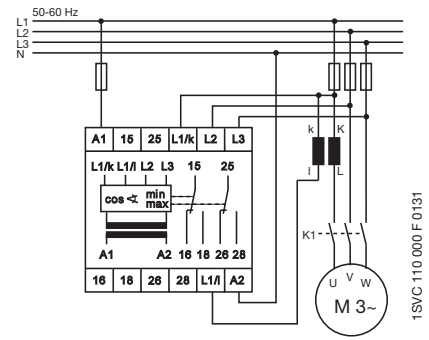


• Current transformers147

Motor load monitors

CM-LWN

Ordering details



CM-LWN

- ① Response delay "Time R"
- ② Threshold for load limit "cos φ_{min} "
- ③ cos φ_{max} : red LED - cos φ_{max} exceeded
- ④ cos φ_{min} : red LED - below cos φ_{min}
- ⑤ Reset button
- ⑥ U: green LED - Control supply voltage
- ⑦ Threshold for load limit "cos φ_{max} "
- ⑧ Starting delay "Time S"
- ⑨ Marker label

- Load status monitoring for asynchronous motors
- Under- and overload monitoring cos φ_{min} and cos φ_{max} in one unit
- Adjustable starting delay 0.3-30 s
- Direct measurement of currents up to 20 A
- Adjustable response time delay 0.2-2 s
- Single-phase or three-phase monitoring
- 2 x 1 c/o contact, closed-circuit principle
- 3 LEDs for status indication

The **CM-LWN** module monitors the load status of inductive loads.

The primary application is the monitoring of single- or three-phase asynchronous motors (squirrel cage) under varying load conditions. The measuring principle is based on the evaluation of the phase shift (φ) between the voltage and the current in one phase.

The phase difference is nearly inversely proportional to the load. Therefore, cos φ , measured relatively from 0 to 1, measures the relationship of effective power to apparent power. A value towards 0 indicates low load and a value towards 1 indicates high load.

Threshold values can be set individually for cos φ_{max} and cos φ_{min} . If the set threshold value is reached, a LED lights up and the relay is de-energized.


If cos φ returns to the acceptable limits (taking into account the hysteresis), the relay is reset to its original state and the LED flashes permanently to indicate the occurrence of the trip event. This message can be deleted using the reset button or by switching off the supply.

A time delay (Time S) of 0.3 to 30 s can be set for the starting phase of the motor. It is also possible to set a response delay time (Time R) of 0.2 to 2 s to suppress unwanted tripping due to unavoidable short load changes during normal operation.


To guarantee correct operation of the response delay (Time R), the adjusted value for cos φ_{max} has to be higher than the value for cos φ_{min} plus the hysteresis. Consequently, the overload and underload indication must not be active at the same time.

Due to the internal electrical isolation of the supply circuit and the measuring circuit, it is also possible to use the device in systems with different supply voltages.

Function diagram CM-LWN

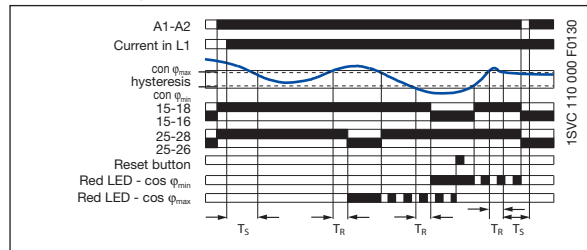

Connection diagram CM-LWN

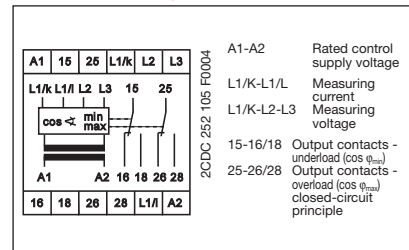

Type	Rated control supply voltage	Order code	Pack. unit pieces	Price 1 piece	Weight 1 piece kg / lb
------	------------------------------	------------	-------------------	---------------	------------------------

Current range: 0.5-5 A

CM-LWN	24-240 V AC/DC	1SVR 450 335 R0000	1		0.30 / 0.66
	110-130 V AC	1SVR 450 330 R0000	1		0.30 / 0.66
	220-240 V AC	1SVR 450 331 R0000	1		0.30 / 0.66
	380- 440 V AC	1SVR 450 332 R0000	1		0.30 / 0.66
	480-500 V AC	1SVR 450 334 R0000	1		0.30 / 0.66

Current range: 2-20 A

CM-LWN	24-240 V AC/DC	1SVR 450 335 R0100	1		0.30 / 0.66
	110-130 V AC	1SVR 450 330 R0100	1		0.30 / 0.66
	220-240 V AC	1SVR 450 331 R0100	1		0.30 / 0.66
	380-440 V AC	1SVR 450 332 R0100	1		0.30 / 0.66
	480-500 V AC	1SVR 450 334 R0100	1		0.30 / 0.66

• Technical data108	• Technical diagrams144	• Dimensional drawings145
• Accessories146	• Current transformers147	

Motor load monitors

CM-LWN

Technical data

2

Type	CM-LWN		
Input circuit - Supply circuit			
Rated control supply voltage U_s - power consumption	A1-A2	24-240 V AC/DC	approx. 8.4 VA/W
	A1-A2	110-130 V AC	approx. 3.6 VA
	A1-A2	220-240 V AC	approx. 3.6 VA
	A1-A2	380-440 V AC	approx. 3.6 VA
	A1-A2	480-500 V AC	approx. 3.6 VA
Rated control supply voltage U_s tolerance		-15 %...+10 %	
Rated frequency	AC versions	50-60 Hz	
	AC/DC versions	15-400 Hz or DC	
Duty time		100 %	
Measuring circuit			
Monitoring function		Motor load monitoring by $\cos \varphi$	
Voltage range	L1/K-L2-L3	110-500 V AC single-phase or three-phase	
Current range	L1/L-L1/K	0.5-5 A version	2-20 A version
Permissible overload of current input		25 A for 3 s	100 A for 3 s
Thresholds		$\cos \varphi_{\min}$ and $\cos \varphi_{\max}$ adjustable from 0 to 1	
Hysteresis (related to phase angle φ in °)		4°	
Frequency of measuring voltage		15-400 Hz	
Response time		300 ms	
Timing circuits			
Start-up time (Time S)		0.3-30 s, adjustable	
Response delay (Time R)		0.2-2 s, adjustable	
Timing error within rated control supply voltage tolerance		≤ 0,5 %	
Timing error within temperature range		≤ 0,06 % / °C	
Indication of operational states			
Control supply voltage		U: green LED	
below $\cos \varphi_{\min}$		$\cos \varphi_{\min}$: red LED	
$\cos \varphi_{\max}$ exceeded		$\cos \varphi_{\max}$: red LED	
Output circuits			
Kind of output		15-16/18, 25-26/28	
Operational principle ¹⁾		closed-circuit principle	
Contact material		AgCdO	
Rated voltage (VDE 0110, IEC 664-1, IEC 947-1)		250 V	
Max. switching voltage		400 V AC, 300 V DC	
Rated operational current (IEC 60947-5-1)	AC12 (resistive) 230 V	4 A	
	AC15 (inductive) 230 V	3 A	
	DC12 (resistive) 24 V	4 A	
	DC13 (inductive) 24 V	2 A	
AC rating (UL 508)	Utilization category (Control Circuit Rating Code)	B 300	
	max. rated operational voltage	300 V AC	
	max. continuous thermal current at B 300	5 A	
	max. making/breaking apparent power at B 300	3600/360 VA	
Mechanical lifetime		30 x 10 ⁶ switching cycles	
Electrical lifetime	at AC12, 230 V, 4 A	0.1 x 10 ⁶ switching cycles	
Short circuit proof, max. fuse rating	n/c / n/o contact	10 A fast-acting / 10 A fast-acting	
General data			
Dimensions (W x H x D)		45 mm x 78 mm x 100 mm (1.77 inch x 3.07 inch x 3.94 inch)	
Mounting position		any	
Degree of protection	enclosure / terminals	IP50 / IP20	
Ambient temperature range	operation / storage	-25...+65 °C / -40...+85 °C	
Mounting		DIN rail (EN 50022)	
Electrical connection			
Wire size	fine-strand with wire end ferrule	2 x 2.5 mm ² (2 x 14 AWG)	
Standards			
Product standard		IEC 255-6, EN 60255-6	
Low Voltage Directive		2006/95/EC	
EMC Directive		2004/108/EC, 91/263/EEC, 92/31/EEC, 93/68/EEC, 93/67/EEC	
Electromagnetic compatibility		EN 61000-6-2, EN 61000-6-4	
electrostatic discharge (ESD)	IEC/EN 61000-4-2	Level 3 (6 kV / 8 kV)	
electromagnetic field (HF radiation resistance)	IEC/EN 61000-4-3	Level 3 (10 V/m)	
fast transients (Burst)	IEC/EN 61000-4-4	Level 3 (2 kV / 5 kHz)	
powerful impulses (Surge)	IEC 1000-4-5, EN 61000-4-5	Level 4 (2 kV L-L)	
HF line emission	IEC 1000-4-6, EN 61000-4-6	Level 3 (10 V)	
Operational reliability (IEC 68-2-6)		5 g	
Mechanical resistance (IEC 68-2-6)		10 g	
Environmental testing (IEC 68-2-30)		24 h cycle time, 55 °C, 93 % rel., 96 h	
Isolation data			
Rating (HD 625.1 S1, VDE 0110, IEC 664-1, IEC 60255-5)		250 V, 400 V, 500 V depending on the version	
Rated insulation voltage between supply-, measuring- and output circuit		4 kV / 1.2 - 50 μs	
Rated impulse withstand voltage between all isolated circuits		2,5 kV, 50 Hz, 1 min.	
Test voltage between all isolated circuits		3	
Pollution category		III	
Overvoltage category		III	

¹⁾ Open-circuit principle: Output relay is energized if the measured value exceeds/drops below the adjusted threshold.
 Closed-circuit principle: Output relay is de-energized if the measured value exceeds/drops below the adjusted threshold.



Thermistor motor protection relays

Content

Benefits and advantages.....	110
Selection table	110
Ordering details	
CM-MSE	111
CM-MSS	111
CM-MSN	113
PTC sensor C011.....	114
Technical data	115
Approvals and marks	62
Technical diagram	144
Dimensional drawings	145
Accessories	146

Thermistor motor protection relays

CM-MSE, CM-MSS, CM-MSN

Benefits and advantages, Selection table

Operating principle and fields of application for thermistor motor protection relays

The CM range of thermistor motor protection relays are used to control motors equipped with PTC temperature sensors. The PTC temperature sensors are incorporated in the motor windings to measure the motor heating. This enables direct control and evaluation of the following operating conditions:

- heavy duty starting
- increased switching frequency
- single-phase operation
- high ambient temperature
- insufficient cooling
- break operation
- unbalance

The relay is independent of the rated motor current, the insulation class and the method of starting.

The PTC sensors are connected in series to the terminals T_a and T_b (or T_{a1} and T_{b1} without short-circuit detection). The number of possible PTC sensors per measuring circuit is limited by the sum of the individual PTC sensor resistances: $R_G = R_1 + R_2 + R_N \leq 1.5 \text{ k}\Omega$.


Under normal operating conditions the resistance is below the response threshold. If only one of the PTC resistors heats up excessively, the output relay de-energizes. If the autoreset function is configured, the output relay energizes automatically after cooling down.

Devices with manual (pushbutton on front-side) or remote reset configuration have to be controlled via the control input by the required signal.

Further applications:

Temperature monitoring of equipment with PTC sensors integrated, such as

- machine rolling bearings,
- hot-air ventilators,
- oil,
- air,
- heating installations, etc.

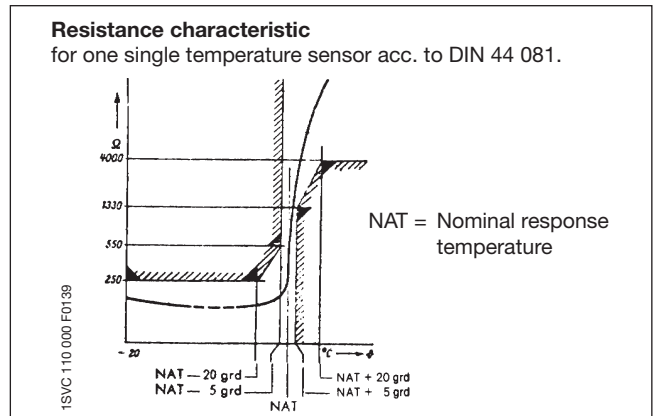

Selection table thermistor motor protection relays

Type	CM-MSE	CM-MSS (1)	CM-MSS (2)	CM-MSS (3)	CM-MSS (4)	CM-MSS (5)	CM-MSS (6)	CM-MSS (7)	CM-MSN
Function									
Measuring range									
Number of sensor circuits	1	1	1	1	1	1	2	3	6
Wire break monitoring	•	•	•	•	•	•	•	•	•
Short-circuit detection	-	-	-	• ¹⁾	•	•	•	•	•
Non-volatile fault storage	-	-	-	-	• ²⁾	• ²⁾	-	• ²⁾	• ²⁾
Operation/ Reset									
Auto reset	•	•	•	•	• ²⁾	• ²⁾	• ²⁾	• ²⁾	• ²⁾
Manual reset	-	-	•	•	•	•	•	•	•
Remote reset	-	-	•	•	•	•	•	•	•
Test button	-	-	-	•	•	•	•	•	•
Output contacts									
Operational principle	closed-circuit principle								
Number / type	1 c/o	1 n/o	2 c/o	2 c/o	1 n/o + 1 n/c	2 c/o	1 c/o per sensor circuit	1 n/o + 1 n/c accumulative evaluation	1 n/o + 1 n/c accumulative evaluation
Width of enclosure	22.5 mm								45 mm
Supply voltages and order codes									
24 V AC	1SVR550805R9300		1SVR430811R9300						
24 V AC/DC		1SVR430800R9100	1SVR430810R9300	1SVR430710R9300					
110-130 V AC	1SVR550800R9300		1SVR430811R0300	1SVR430711R0300					
220-240 V AC	1SVR550801R9300	1SVR430801R1100	1SVR430811R1300	1SVR430711R1300					
380-440 V AC				1SVR430711R2300					
24-240 V AC/DC					1SVR430720R0400	1SVR430720R0300	1SVR430710R0200	1SVR430720R0500	1SVR450025R0100

1) configurable via terminals

2) Auto reset without non-volatile fault storage configurable by permanent jumpering of connecting terminals S1-T2 or S1/X1-S2/X2

Thermistor motor protection relays

CM-MSE, CM-MSS

Ordering details


2CDC 251 012 F06/03



CM-MSE


CM-MSE

- Auto reset
- Connection of several sensors (max. 6 sensors conn. in series)
- Monitoring of bimetals
- 1 n/o contact
- Excellent cost / performance ratio



1SVC 110 000 F0140

A1-A2 Rated control supply voltage
T1-T2 Sensor circuit
13-14 Output contact - Closed-circuit principle




1SVC 110 000 F0141

Type	Rated control supply voltage	Order code	Pack. unit pieces	Price 1 piece	Weight 1 piece kg / lb
CM-MSE	24 V AC	1SVR 550 805 R9300	1		0.11 / 0.24
	110-130 V AC	1SVR 550 800 R9300	1		0.11 / 0.24
	220-240 V AC	1SVR 550 801 R9300	1		0.11 / 0.24


CM-MSS (1), 1 c/o contact

- Auto reset
- Connection of several sensors
- Monitoring of bimetals
- 1 c/o contact
- 2 LEDs for status indication



1SVC 110 000 F0142

A1-A2 Rated control supply voltage
T1-T2 Sensor circuit
11-12/14 Output contact - Closed-circuit principle




1SVC 110 000 F0141

Type	Rated control supply voltage	Order code	Pack. unit pieces	Price 1 piece	Weight 1 piece kg / lb
CM-MSS (1)	24 V AC/DC ¹⁾	1SVR 430 800 R9100	1		0.15 / 0.33
	220-240 V AC	1SVR 430 801 R1100	1		0.15 / 0.33


CM-MSS (2), 2 c/o contacts

- Fault storage can be switched off
- Auto reset configurable
- Reset button
- Remote reset
- Monitoring of bimetals
- 2 c/o contacts
- 2 LEDs for status indication



1SVC 110 000 F519

A1-A2 Rated control supply voltage
T1-T2 Sensor circuit
S1-T2 Remote reset jumper = no storage
X1-T2 Output contacts - Closed-circuit principle




2CDC 252 023 F06/07

Type	Rated control supply voltage	Order code	Pack. unit pieces	Price 1 piece	Weight 1 piece kg / lb
CM-MSS (2)	24 V AC/DC ¹⁾	1SVR 430 810 R9300	1		0.15 / 0.33
	24 V AC	1SVR 430 811 R9300	1		0.15 / 0.33
	110-130 V AC	1SVR 430 811 R0300	1		0.15 / 0.33
	220-240 V AC	1SVR 430 811 R1300	1		0.15 / 0.33


CM-MSS (3), 2 c/o contacts, short-circuit monitoring configurable

- Fault storage can be switched off
- Auto reset configurable
- Reset button
- Remote reset
- Monitoring of bimetals
- Short-circuit monitoring of the sensor circuit configurable
- 2 c/o contacts
- 2 LEDs for status indication



1SVC 110 000 F0143

A1-A2 Rated control supply voltage
S1-T2 remote reset jumper = without storage
T1-T2x measuring circuit without short-circuit monitoring
T1-T2 measuring circuit with short-circuit monitoring
11-12/14 Output contacts
21-22/24 Closed-circuit principle



1SVC 110 000 F0144

Type	Rated control supply voltage	Order code	Pack. unit pieces	Price 1 piece	Weight 1 piece kg / lb
CM-MSS (3)	24 V AC/DC ¹⁾	1SVR 430 710 R9300	1		0.15 / 0.33
	110-130 V AC	1SVR 430 711 R0300	1		0.15 / 0.33
	220-240 V AC	1SVR 430 711 R1300	1		0.15 / 0.33
	380-440 V AC	1SVR 430 711 R2300	1		0.15 / 0.33

¹⁾ not electrically isolated

• Accessories: PTC sensors114	• Technical data115
• Technical diagrams144	• Dimensional drawings145
	• Accessories146


- F: red LED - fault tripping
- U: green LED - control supply voltage
- Marker label
- Reset button

Thermistor motor protection relays

CM-MSS


Ordering details

2

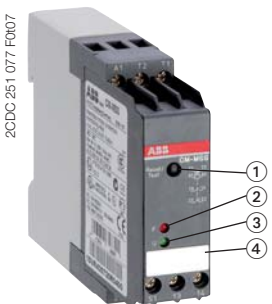

2CDC 251 017 F007

CM-MSS (4)

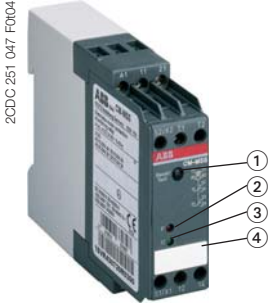

2CDC 251 047 F004


CM-MSS (5)

- ① Reset / test button
- ② F: red LED - fault tripping
- ③ U: green LED - control supply voltage
- ④ Marker label

CM-MSS (4) + CM-MSS (5), 1-channel


- Short-circuit monitoring of the sensor circuit
- Wide supply voltage range: 24-240 V AC/DC
- Non-volatile fault storage selectable
- Reset and test button
- Remote reset
- Auto reset configurable
- Output contacts: 1 n/c and 1 n/o or 2 c/o contacts
- 2 LEDs for status indication

CM-MSS (4)




2CDC 252 016 F0004

A1-A2 Rated control supply voltage
T1-T2 Sensor circuit
S1-T2 Remote reset
13-14 Output contacts - Closed-circuit principle
21-22




11SV 110 000 F0145
jumper = no storage

CM-MSS (5)




2CDC 252 147 F0006

A1-A2 Rated control supply voltage
T1-T2 Sensor circuit
S1/X1-S2/X2 Reset
11-12/14 Output contacts - Closed-circuit principle
21-22/24



2CDC 252 044 F0004

Type	Rated control supply voltage	Order code	Pack. unit pieces	Price 1 piece	Weight 1 piece kg / lb
CM-MSS (4) 1-channel 1n/c, 1n/o	24-240 V AC/DC	1SVR 430 720 R0400	1		0.15 / 0.33
CM-MSS (5) 1-channel 2 c/o	24-240 V AC/DC	1SVR 430 720 R0300	1		0.15 / 0.33

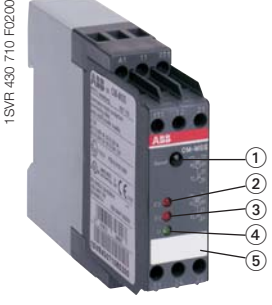


1SVR 430 710 F0200

CM-MSS (6)

- ① Reset button
- ② to ③ F1-F2: red LED - fault tripping 1 to 2
- ④ U: green LED - control supply voltage
- ⑤ Marker label


CM-MSS (6), 2-channel, single evaluation

- Short-circuit monitoring for the sensor circuits
- Wide supply voltage range: 24-240 V AC/DC
- 2 separate sensor circuits for monitoring of two motors or one motor with 2 sensor circuits (prewarning and final switch off)
- Reset button
- Auto reset configurable
- Output contacts: 2 x 1 c/o contact
- 3 LEDs for status indication



11SV 110 000 F 0146

A1-A2 Rated control supply voltage
11-12/14, 21-22/24 Output contacts - Closed-circuit principle
1T1-T2 Sensor circuit

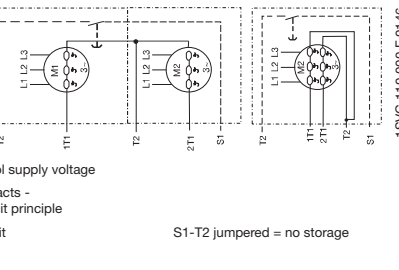

11SV 110 000 F 0146
S1-T2 jumpered = no storage

Type	Rated control supply voltage	Order code	Pack. unit pieces	Price 1 piece	Weight 1 piece kg / lb
CM-MSS (6)	24-240 V AC/DC	1SVR 430 710 R0200	1		0.15 / 0.33


• Accessories: PTC sensors114	• Technical data115
• Technical diagrams144	• Dimensional drawings145
	• Accessories146



Thermistor motor protection relays

CM-MSS, CM-MSN

Ordering details




CM-MSS (7)


- ① Reset / test button
- ② to ④ F1-F3: red LED - fault tripping 1 to 3
- ⑤ U: green LED - control supply voltage
- ⑥ Marker label

CM-MSS (7), 3 sensor circuits, accumulative evaluation

- Short-circuit monitoring for the sensor circuits
- Wide supply voltage range 24-240 V AC/DC
- Non-volatile fault storage configurable
- Remote reset
- Auto reset configurable
- Reset and test button
- Output contacts: 1 n/c and 1 n/o contact
- 4 LEDs for status indication

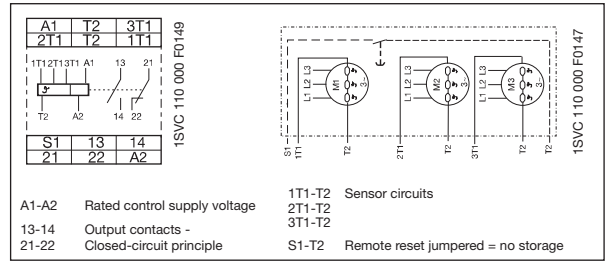

Type	Rated control supply voltage	Order code	Pack. unit pieces	Price 1 piece	Weight 1 piece kg / lb
CM-MSS (7)	24-240 V AC/DC	1SVR 430 720 R0500	1		0.15 / 0.33




CM-MSN

- ① Reset / Test button
- ② to ⑦ F1-F6: red LED - fault tripping F1 to F6
- ⑧ U: green LED - control supply voltage
- ⑨ Marker label

CM-MSN, 6 sensor circuits, accumulative evaluation

- Short-circuit monitoring of the sensor circuit
- Wide supply voltage range: 24-240 V AC/DC
- Non-volatile fault storage configurable
- Remote reset
- Auto reset configurable
- Reset and test button
- Output contacts: 1 n/c, 1 n/o contact
- 7 LEDs for status indication

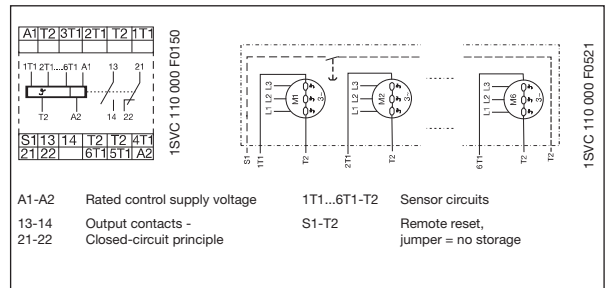

Type	Rated control supply voltage	Order code	Pack. unit pieces	Price 1 piece	Weight 1 piece kg / lb
CM-MSN	24-240 V AC/DC	1SVR 450 025 R0100	1		0.23 / 0.51

accumulative evaluation = if any input exceeds the threshold, the output relay will trip

• Accessories: PTC sensors114	• Technical data115
• Technical diagrams144	• Dimensional drawings145
	• Accessories146

Thermistor motor protection PTC temperature sensors C011

Ordering details, technical data

2

Temperature sensor characteristic

2CDC 252 068 F0208

1SVC 110 000 F0531

The PTC temperature sensors (temperature-dependent with positive temperature coefficient) are selected by the manufacturer of the motor depending on:

- the motor insulation class according to IEC/EN 60034-11,
- the special characteristics of the motor, such as the conductor cross-section of the windings, the permissible overload factor etc.
- special conditions prescribed by the user, such as the permissible ambient temperature, risks resulting from locked rotor, extent of permitted overload etc.

One temperature sensor must be embedded in each phase winding. For instance, in case of three-phase squirrel cage motors, three sensors are embedded in the stator windings. For pole-changing motors with one winding (Dahlander connection), 3 sensors are also sufficient. Pole-changing motors with two windings, however, require 6 sensors.

If an additional warning is required before the motor is switched off, separate sensors for a correspondingly lower temperature must be embedded in the winding. They have to be connected to a second control unit.

The sensors are suitable for embedding in motor windings with rated operating voltages of up to 600 V AC.

Conductor length: 500 mm per sensor.

A 14 V varistor can be connected in parallel to protect the sensors from overvoltage.

Due to their characteristics, the thermistor motor protection relays can also be used with PTC temperature sensors of other manufacturers which comply with DIN 44 081 and DIN 44 082.

Type	Rated response temperature T_{NF}	Color coding	Order code	Pack. unit pieces	Price 1 piece	Weight 1 piece kg / lb
------	-------------------------------------	--------------	------------	-------------------	---------------	------------------------

Temperature sensor C011, standard version acc. to DIN 44081

C011-70	70 °C	white-brown	GHC 011 0003 R0001	3		0.02/0.044
C011-80	80 °C	white-white	GHC 011 0003 R0002	3		0.02/0.044
C011-90	90 °C	green-green	GHC 011 0003 R0003	3		0.02/0.044
C011-100	100 °C	red-red	GHC 011 0003 R0004	3		0.02/0.044
C011-110	110 °C	brown-brown	GHC 011 0003 R0005	3		0.02/0.044
C011-120	120 °C	gray-gray	GHC 011 0003 R0006	3		0.02/0.044
C011-130	130 °C	blue-blue	GHC 011 0003 R0007	3		0.02/0.044
C011-140	140 °C	white-blue	GHC 011 0003 R0011	3		0.02/0.044
C011-150	150 °C	black-black	GHC 011 0003 R0008	3		0.02/0.044
C011-160	160 °C	blue-red	GHC 011 0003 R0009	3		0.02/0.044
C011-170	170 °C	white-green	GHC 011 0003 R0010	3		0.02/0.044

Triple temperature sensor C011-3

C011-3-150	150 °C	black-black	GHC 011 0033 R0008	1		0.05/0.11
------------	--------	-------------	--------------------	---	--	-----------

Technical data

Characteristic data	Sensor type C011
Cold-state resistance	50 -100 Ω at 25 °C
Warm-state resistance ± 5 up to 6 K of rated response temperature T_{NF}	10 000 Ω
Thermal time constant, sensor open ¹⁾	< 5 s
Permitted ambient temperature	+180 °C

Rated response temperature ± tolerance $T_{NF} \pm \Delta T_{NF}$	PTC resistance R from -20 °C to $T_{NF} - 20$ K	PTC resistance R at PTC temperatures of:		
		$T_{NF} - \Delta T_{NF}$ ($U_{PTC} \leq 2.5$ V)	$T_{NF} + \Delta T_{NF}$ ($U_{PTC} \leq 2.5$ V)	$T_{NF} + 15$ K ($U_{PTC} \leq 7.5$ V)
70 ± 5 °C	≤ 100 Ω	≤ 570 Ω	≥ 570 Ω	-
80 ± 5 °C		≤ 550 Ω	≥ 1330 Ω	≥ 4000 Ω
90 ± 5 °C				
100 ± 5 °C				
110 ± 5 °C				
120 ± 5 °C				
130 ± 5 °C				
140 ± 5 °C				
150 ± 5 °C				
160 ± 5 °C		≤ 570 Ω	≥ 570 Ω	-
170 ± 7 °C				

¹⁾ Not embedded in windings.

²⁾ For triple temperature sensor take values x 3.

Thermistor motor protection relays

CM-MSE, CM-MSS, CM-MSN

Technical data

Type		CM-MSE	CM-MSS	CM-MSN
Input circuit				
Rated control supply voltage U_s - power consumption	A1-A2		24 V AC	approx. 1.5 VA
	A1-A2		24 V AC/DC	approx. 1.1 VA / 0.6 W
	A1-A2		110-130 V AC	approx. 1.5 VA
	A1-A2		220-240 V AC	approx. 1.5 VA
	A1-A2		380-440 V AC	approx. 1.7 VA
Rated control supply voltage U_s tolerance			-15 % ... +10 %	
Rated frequency		AC: 50-60 Hz / 24-240 V AC/DC versions: 15-400 Hz		
Duty time		100 %		
Measuring circuit				
		T1-T2	T1-T2/T2x, 1T1...6T1-T2	1T1...6T1-T2
Monitoring function		temperature monitoring by means of PTC sensors		
Number of sensor circuits		1	1, 2 oder 3 (see order details)	6
Short-circuit monitoring		-	see ordering details	yes
Non-volatile fault storage		-	see ordering details	configurable
Test function		-	see ordering details	yes
Sensor circuit				
Temperature threshold (relay de-energizes)		2.7-3.7 k Ω	CM-MSS (1+2): 3050 \pm 550 Ω CM-MSS (3-7): 3.6 k Ω \pm 5 %	3.6 k Ω \pm 5 %
Temperature hysteresis (relay energizes)		1.7-2.3 k Ω	CM-MSS (1+2): 1900 \pm 400 Ω CM-MSS (3-7): 1.6 k Ω \pm 5 %	1.6 k Ω \pm 5 %
Short circuit threshold (relay de-energizes)			<20 Ω	
Short circuit hysteresis (relay energizes)			>40 Ω	
Maximum total resistance of sensors connected in series (cold state)			\leq 1.5 k Ω	
Maximum sensor cable length for short-circuit detection			2 x 100 m at 0.75 mm ² , 2 x 400 m at 2.5 mm ²	
Response time			<100 ms	
Control circuit for storage and hysteresis function				
Remote reset	S1-T2 or S1/X1-S2/X2	-	n/o contact	
Maximum no-load voltage		-	approx. 25 V, 24-240 V; AC/DC versions: 5.5 V	
Maximum cable length		-	\leq 50 m, 100-200 m if shielded	
Indication of operational states				
Control supply voltage	U: green LED	-	□: control supply voltage applied	
Fault indication	F: red LED	-	□: output relay de-energized	
Output circuits				
		13-14	11-12/14, 21-22/24, 13-14, 21-22	13-14, 21-22
Kind of output		1 n/o contact	CM-MSS (1): 1 c/o contact CM-MSS (2,3,5): 2 c/o contacts CM-MSS (4, 7): 1 n/o + 1 n/c CM-MSS (6): 2x1 c/o contact	1 n/o + 1 n/c contact
Operational principle		closed-circuit principle (output relay de-energizes if the measured value exceeds/drops below the adjusted threshold)		
Contact material		AgCdO	CM-MSS (1+2+6): AgCdO CM-MSS (3+4+5+7): AgNi	AgNi
Rated voltage (VDE 0110, IEC 664-1, IEC 60947-1)		250 V		
Maximum switching voltage		250 V		
Rated operational current (IEC 60947-5-1)	AC12 (resistive)	230 V	4 A	
	AC15 (inductive)	230 V	3 A	
	DC12 (resistive)	24 V	4 A	
	DC13 (inductive)	24 V	2 A (1.5 A - n/c contact ¹⁾)	
AC rating (UL 508)	Utilization category (Control Circuit Rating Code)		B 300	
	max. rated operational voltage		300 V AC	
	max. continuous thermal current at B 300		5 A	
	max. making/breaking apparent power at B 300		3600/360 VA	
Mechanical lifetime		30 (10 ¹¹) x 10 ⁶ switching cycles		
Electrical lifetime (AC12, 230 V, 4 A)		0.1 x 10 ⁶ switching cycles		
Short circuit proof	n/c contact	10 A fast-acting	4 A (10 A ¹⁾) fast-acting	10 A fast-acting
maximum fuse rating	n/o contact	10 A fast-acting	6 A (10 A ¹⁾) fast-acting	10 A fast-acting
General data				
Dimensions (W x H x D)		22.5 x 78 x 78.5 mm (0.89 x 3.07 x 3.09 in)	22.5 x 78 x 100 mm (0.89 x 3.07 x 3.94 in)	45 x 78 x 100 mm (1.77 x 3.07 x 3.94 in)
Weight		approx. 0.11 kg (0.24 lb)	approx. 0.15 kg (0.33 lb)	approx. 0.23 kg (0.51 lb)
Mounting position		any		
Degree of protection enclosure / terminals		IP50 / IP20		
Ambient temperature range	operation	-20...+60 °C		-25...+65 °C
	storage	-40...+85 °C		
Mounting		DIN rail (EN 50022)		

¹⁾ 1SVR 430 710 R 0200, 1SVR 430 8xx R xxxx

Thermistor motor protection relays

CM-MSE, CM-MSS, CM-MSN

Technical data

Type	CM-MSE	CM-MSS	CM-MSN
Electrical connection			
Wire size	fine strand with wire end ferrule	2 x 1.5 mm ² (2 x 16 AWG)	2 x 2.5 mm ² (2 x 14 AWG)
	fine strand without wire end ferrule	2 x 0.75-1.5 mm ² (2 x 18-16 AWG)	2 x 0.75-2.5 mm ² (2 x 18-14 AWG)
	rigid	2 x 1-1.5 mm ² (2 x 18-16 AWG)	2 x 0.75-2.5 mm ² (2 x 18-14 AWG)
Stripping length	2 x 0.75-1.5 mm ² (2 x 18-16 AWG)	2 x 0.5-4 mm ² (2 x 20-12 AWG)	
Tightening torque	10 mm (0.39 inch)		7 mm (0.28 inch)
Standards			
Product standard	IEC 255-6, EN 60255-6		
Low Voltage Directive	2006/95/EC		
EMC Directive	2004/108/EC, 91/263/EEC, 92/31/EEC, 93/68/EEC, 93/67/EEC		
Electromagnetic compatibility	EN 61000-6-2, EN 61000-6-4		
electrostatic discharge (ESD)	IEC/EN 61000-4-2	Level 3 (6 kV / 8 kV)	
electromagnetic field (HF radiation resistance)	IEC/EN 61000-4-3	Level 3 (10 V/m)	
fast transients (Burst)	IEC/EN 61000-4-4	Level 3 (2 kV / 5 kHz)	
powerful impulses (Surge)	IEC 1000-4-5, EN 61000-4-5	Level 3/4 (1/2 kV)	
HF line emission	IEC 1000-4-6, EN 61000-4-6	Level 3 (10 V)	
Operational reliability (IEC 68-2-6)	6 g	4 g	5 g
Resistance to vibration (IEC 68-2-6)	10 g	6 g	10 g
Environmental testing (IEC 68-2-30)	24 h cycle time, 55 °C, 93 % rel., 96 h		
Isolation data			
Rated voltage between supply, measuring and output circuit	250 V		
Rated impulse withstand voltage between all isolated circuits	4 kV / 1.2 - 50 µs		
Test voltage between all isolated circuits	2.5 kV, 50 Hz, 1 min.		
Pollution degree	3		
Overvoltage category	III		

• Approvals62



Temperature monitors for PT100, PT1000, KTY83, KTY84 and NTC sensors


Content

Ordering details	118
Overview, functional description and diagrams	120
Connection diagrams, connection of resistance thermometer sensors	121
Technical data	122
Approvals and marks	62
Dimensional drawings	145

Analog temperature monitoring relays C510 and C511


Ordering details

2



C510

- ① Threshold value adjustment
- ② Hysteresis adjustment
- ③ LED: control supply voltage
- ④ LED \varnothing : relay status
- ⑤ Marker label
- ⑥ Circuit diagram



C511

- ① Threshold value 1 (tripping) adjustment
- ② Threshold value 2 (warning) adjustment
- ③ Hysteresis adjustment for threshold value 1
- ④ Selection switch for open- or closed circuit principle
- ⑤ LED: control supply voltage
- ⑥ LED \varnothing 1: relay 1 energized
- ⑦ LED \varnothing 2: relay 2 energized
- ⑧ Marker label
- ⑨ Circuit diagram

Analog tripping devices - C510 and C511

- Sensor types: PT100
- Measuring principle for 2- and 3-wire sensors
- Electrical isolation between the sensors and the power supply (except for 24 V AC/DC devices)
- Separate design for the crossing of the upper or lower threshold
- Depending on the version, measurement ranges for -50...+50 °C / 0...+100 °C / 0...+200 °C
- no storage
- Adjustment precision $\pm 5\%$
- 22.5 mm enclosure with 12 terminals

C510

- 1 threshold adjustable via absolute scale in °C
- Hysteresis adjustable from 2-20 %
- 1 n/o and 1 n/c contact
- 2 LEDs for status indication
- Closed-circuit principle

Type	Rated control supply voltage	Order code	Measuring range	Pack.-unit piece	Price 1 piece	Weight 1 piece kg / lb
------	------------------------------	------------	-----------------	------------------	---------------	------------------------

Monitoring function: Overtemperature

C510.01-24	24 V AC/DC	1SAR 700 001 R0005	-50...+50 °C	1		0.15/0.33
C510.01-K	110/230 V AC	1SAR 700 001 R0006	-50...+50 °C	1		0.19/0.42
C510.02-24	24 V AC/DC	1SAR 700 002 R0005	0...+100 °C	1		0.15/0.33
C510.02-K	110/230 V AC	1SAR 700 002 R0006	0...+100 °C	1		0.19/0.42
C510.03-24	24 V AC/DC	1SAR 700 003 R0005	0...+200 °C	1		0.15/0.33
C510.03-K	110/230 V AC	1SAR 700 003 R0006	0...+200 °C	1		0.19/0.42

Monitoring function: Undertemperature

C510.11-24	24 V AC/DC	1SAR 700 004 R0005	-50...+50 °C	1		0.15/0.33
C510.11-K	110/230 V AC	1SAR 700 004 R0006	-50...+50 °C	1		0.19/0.42
C510.12-24	24 V AC/DC	1SAR 700 005 R0005	0...+100 °C	1		0.15/0.33
C510.12-K	110/230 V AC	1SAR 700 005 R0006	0...+100 °C	1		0.19/0.42
C510.13-24	24 V AC/DC	1SAR 700 006 R0005	0...+200 °C	1		0.15/0.33
C510.13-K	110/230 V AC	1SAR 700 006 R0006	0...+200 °C	1		0.19/0.42

C511

- 2 thresholds (warning and switch-off) adjustable via absolute scale in °C
- Hysteresis for threshold 1 adjustable from 2-20 %
- Hysteresis for threshold 2 fixed 5 %
- 1 n/o and 1 c/o
- 3 LEDs for status indication
- Open- or closed-circuit principle selectable

Type	Rated control supply voltage	Order code	Measuring range	Pack.-unit piece	Price 1 piece	Weight 1 piece kg / lb
------	------------------------------	------------	-----------------	------------------	---------------	------------------------

Monitoring function: Overtemperature

C511.01-24	24 V AC/DC	1SAR 700 011 R0005	-50...+50 °C	1		0.17/0.37
C511.01-W	24-240 V AC/DC	1SAR 700 011 R0010	-50...+50 °C	1		0.18/0.40
C511.02-24	24 V AC/DC	1SAR 700 012 R0005	0...+100 °C	1		0.17/0.37
C511.02-W	24-240 V AC/DC	1SAR 700 012 R0010	0...+100 °C	1		0.18/0.40
C511.03-24	24 V AC/DC	1SAR 700 013 R0005	0...+200 °C	1		0.17/0.37
C511.03-W	24-240 V AC/DC	1SAR 700 013 R0010	0...+200 °C	1		0.18/0.40

Monitoring function: Undertemperature


C511.11-24	24 V AC/DC	1SAR 700 014 R0005	-50...+50 °C	1		0.17/0.37
C511.11-W	24-240 V AC/DC	1SAR 700 014 R0010	-50...+50 °C	1		0.18/0.40
C511.12-24	24 V AC/DC	1SAR 700 015 R0005	0...+100 °C	1		0.17/0.37
C511.12-W	24-240 V AC/DC	1SAR 700 015 R0010	0...+100 °C	1		0.18/0.40
C511.13-24	24 V AC/DC	1SAR 700 016 R0005	0...+200 °C	1		0.17/0.37
C511.13-W	24-240 V AC/DC	1SAR 700 016 R0010	0...+200 °C	1		0.18/0.40

• Function diagrams120 • Technical data122 • Dimensional drawings145

Digital temperature monitoring relays C512 and C513

Ordering details

1SYVC 110 000 F0657



C512, C513

- ① Display
- ② Adjustment button
- ③ Menu selection switch
- ④ LED Ø1: Threshold value 1
- ⑤ LED Ø2: Threshold value 1
- ⑥ LED Ready: device in function
- ⑦ Marker label

Digital tripping devices - C512 und C513

- Adjustable sensor types: PT100, PT1000, KTY83, KTY84, NTC-B57227-K333-A1
- Measuring principle for 2-wire and 3-wire sensors
- Electrical isolation (except 24 V AC/DC devices)
- Adjustable over-, undertemperature monitoring or range monitoring function
- 2 thresholds
- Hysteresis for both thresholds (1-99 Kelvin)
- Adjustable time delay from 0-999 s affects to both thresholds
- Storage function selectable via external signal (Y1-Y2)
- Non-volatile storage of parameter settings
- 1 n/o (for wire-break and short-circuit detection) and 2 c/o
- Multifunctional digital display
- 3 LEDs for status indication
- Open- or closed-circuit principle selectable
- 45 mm wide enclosure with 24 terminals

C512

- Temperature monitor for 1 sensor circuit

Type	Rated control supply voltage	Order code	Measuring range	Pack.-unit piece	Price 1 piece	Weight 1 piece k g / lb
------	------------------------------	------------	-----------------	------------------	---------------	-------------------------

Monitoring function: Over- and undertemperature, range monitoring function

C512-24	24 V AC/DC	1SAR 700 100 R0005	-50...+500 °C *)	1		0.32/0.71
C512-W	24-240 V AC/DC	1SAR 700 100 R0010	-50...+500 °C *)	1		0.33/0.73

C513

- Temperature monitor for 1-3 sensor circuits
 - In the 3-sensor version the status of the single sensors is displayed if the temperature exceeds or falls below the threshold.
- This way it can be easily determined which one of the connected sensors has exceeded or dropped below either one or both threshold values.

Type	Rated control supply voltage	Order code	Measuring range	Pack.-unit piece	Price 1 piece	Weight 1 piece kg / lb
------	------------------------------	------------	-----------------	------------------	---------------	------------------------

Monitoring function: Over- and undertemperature, range monitoring function

C513-W	24-240 V AC/DC	1SAR 700 110 R0010	-50...+500 °C *)	1		0.34/0.75
---------------	----------------	---------------------------	------------------	---	--	-----------

Accessories - Replaceable cover marking for digital devices

Type	use for	Order code	Language	Pack.-unit piece	Price 1 piece	Weight 1 piece kg / lb
------	---------	------------	----------	------------------	---------------	------------------------

C512-D	C512	1SAR 700 101 R0100	German	5		
C512-E	C512	1SAR 700 102 R0100	English	5		
C513-D	C513	1SAR 700 111 R0100	German	5		
C513-E	C513	1SAR 700 112 R0100	English	5		

*) The measuring range depends on the used sensor type:

- PT100: -50...+500 °C
 - PT1000: -50...+500 °C
 - NTC: +80...+160 °C
 - KTY83: -50...+175 °C
 - KTY84: -40...+300 °C
- (Typ Siemens Matsushita B57272-A333-A1 - 100 °C: 1,8 kΩ, 25 °C: 32,762 kΩ)

• Function diagrams120 • Technical data122 • Dimensional drawings145



Temperature monitoring relays

C51x range

Overview, functional description and diagrams

Overview

The C51x temperature monitoring relays can be used for temperature measurement in solid, liquid and gaseous media. The temperature is acquired by the sensor in the medium, evaluated by the device and monitored to determine whether it is within an operating range (range monitoring function) or has exceeded or fallen below a threshold.

Functional description

Analog tripping devices

Once the temperature has reached the set threshold, output relay K1 changes its switching state. In devices with 2 thresholds relay K2 reacts correspondingly if the second threshold is reached. No time delay can be set ($t = 0$).

The relays immediately return to their original switching state if the temperature reaches the set hysteresis value.

Once the temperature has reached the upper threshold of v_1 , output relay K1 changes its switching state after the set time t .

The relay immediately returns to its original switching state if the temperature reaches the set hysteresis value.

K2 reacts correspondingly at the lower threshold value of v_2 .


Once the temperature has reached the set threshold of v_1 , output relay K1 changes its switching state after the set time t has elapsed. (K2 reacts in the same way at v_2).

The relays return to their original state if the temperature drops below the set hysteresis value and the connection Y1-Y2 is interrupted for a short time.

Digital tripping devices

Once the temperature has reached the set threshold of v_1 , output relay K1 changes its switching state after the set time delay t has elapsed (K2 reacts in the same way for v_2).

Characteristic curves of resistance sensors

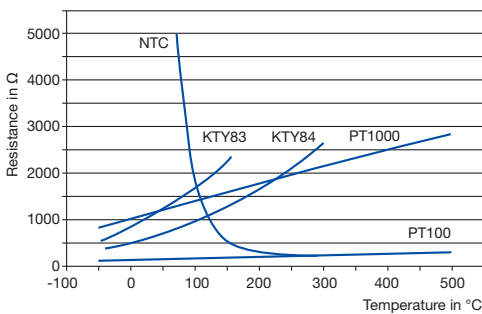

2CDC 252 076 F0207


The family is composed of analog adjustable devices with one or two thresholds, and digital devices which are a good alternative especially in the low-end range.

The output relay switches on or off at the thresholds, depending on the configured functionality (open- or closed-circuit principle selectable).

Function diagrams


Overtemperature

Open-circuit principle



1SVC 110 000 F0191


Closed-circuit principle



1SVC 110 000 F0192


Undertemperature

Open-circuit principle



1SVC 110 000 F0193


Closed-circuit principle



1SVC 110 000 F0194


Range monitoring (only digital devices)

Open-circuit principle



1SVC 110 000 F0195


Closed-circuit principle



1SVC 110 000 F0196

Function principle with storage function

using overtemperature with closed-circuit principle as an example




1SVC 110 000 F0197

— absolute limit
 ■ hysteresis
 hysteresis

Temperature monitoring relays C51x range


Connection diagrams, connection of resistance thermometer sensors

Connection diagrams




C510

A1/A3-A2 Rated control supply voltage
11-12 Output contacts
13-14
T1-T3 Sensor connection




C511

A1-A2 Rated control supply voltage
11-12/14 Output contacts
23-24
T1-T3 Sensor connection



C512

A1-A2 Rated control supply voltage
15-16/18 Output contacts
25-26/28
33-34
T1-T3 Sensor connection
Y1-Y2 Connection for storage bridge



C513

A1-A2 Rated control supply voltage
15-16/18 Output contacts
25-26/28
33-34
1T1-1T3 Sensor connection 1
2T1-2T3 Sensor connection 2
3T1-3T3 Sensor connection 3
Y1-Y2 Connection for storage bridge

Connection of resistance thermometer sensors


2-wire measurement

When using 2-wire temperature sensors the sensor resistance and the wire resistance are added together.

The resulting systematic errors must be taken into account when adjusting the tripping device.

A jumper must be connected between the terminals T2 and T3.

The following table can be used for PT100 sensors to determine the temperature errors caused by the line length.



ATTENTION!

When using resistance sensors with two-wire connection a bridge must be inserted between terminals T2 and T3.

Error caused by the line

The error resulting from the line resistance amounts to approx. 2.5 Kelvin/Ohm. If the resistance of the line is not known and it is not possible to measure it, the error caused by the line can be estimated using the following table.

Temperature error

(depending on the line length and conductor cross section for PT100 sensors at an ambient temperature of 20 °C, in K)


Line length in m	Wire size mm ²			
	0.50	0.75	1	1.5
0	0.0	0.0	0.0	0.0
10	1.8	1.2	0.9	0.6
25	4.5	3.0	2.3	1.5
50	9.0	6.0	4.5	3.0
75	13.6	9.0	6.8	4.5
100	18.1	12.1	9.0	6.0
200	36.3	24.2	18.1	12.1
500	91.6	60.8	45.5	30.2

3-wire measurement

To minimize the influence of the wire resistance, a three-wire connection is usually used.

By means of the additional wire two measuring circuits are created.

One of these two circuits is used for reference. This way, the tripping device can calculate and take into account the wire resistance automatically.



Temperature monitoring relays

C51x range

Technical data

Type		C510	C511	C512	C513
Input circuit					
Rated control supply voltage	A1-A2	24 V AC/DC			-
U _s	A1-A2	230 V AC	24-240 V AC/DC		
	A3-A2	110 V AC	-		
Power consumption	AC	< 4 VA		< 7 VA	
	DC	< 2 W		< 4 W	
Rated control supply voltage U _s tolerance		-15...+10 %			
Rated frequency	AC	50/60 Hz			
Sensor circuit					
Sensor type		PT100		PT100, PT1000, KTY83, KTY84, NTC	
Sensor current	PT100	typ. 1 mA			
	PT1000, KTY83, KTY84, NTC	-		typ. 0.2 mA	
Wire-break detection		no		yes (not for NTC)	
Short-circuit detection		no		yes	
3-wire connection		yes (2-wire connection of sensors with terminals T2 and T3 bridged)			
Measuring circuit					
Setting accuracy at T _s = 20 °C (T ₂₀)		typ. < ± 5 % of full-scale value		< ± 2 K ± 1 digit	
Maximum error within the temperature range		< 2 %		0.05 °C / °C deviation from T ₂₀	
Response time		-		500 ms	
Hysteresis settings	temperature 1	2-20 % of full-scale value		1-99 kelvin	
	temperature 2	-	5 % of full-scale value	1-99 kelvin	
Tripping delay		-		0-999 s	
Output circuit					
Kind of output		1 n/o + 1 n/c	1 c/o + 1 n/o	2 c/o + 1 n/o	2 c/o + 1 n/o
Rated operating current (IEC 60947-1-5)	AC12 (resistive) 230 V				
	AC15 (inductive) 230 V	3 A			
	DC12 (resistive) 24 V	1 A			
	DC13 (inductive) 24 V	0.1 A			
Mechanical lifetime		3 x 10 ⁶ switching cycles		30 x 10 ⁶ switching cycles	
Electrical lifetime (AC15 at 3 A)		0.1 x 10 ⁶ switching cycles			
Short-circuit proof, maximum fuse rating		4 A, operating class gL/gG			
General data					
Dimensions (W x H x D)		22.5 x 101.6 x 86 mm (0.89 x 4 x 3.39 in)		45 x 105.9 x 86 mm (1.77 x 4.17 x 3.39 in)	
Tightening torque		0.8-1.2 Nm			
Mounting position		any			
Degree of protection enclosure / terminals		IP 40 / IP 20			
Ambient temperature range	operation	-25...+60 °C			
	storage	-40...+80 °C			
Mounting		DIN rail (EN 50022)			
Electrical connection					
Wire size	rigid	1 x 4 mm ² (1 x 12 AWG), 2 x 2.5 mm ² (2 x 14 AWG)			
	fine-strand with wire end ferrule	1 x 2.5 mm ² (1 x 14 AWG), 2 x 1.5 mm ² (2 x 16 AWG)			
Standards					
Environmental conditions		IEC 60721-3-3			
Low Voltage Directive		IEC 60947-5-1, VDE 0660			
Electromagnetic compatibility	Interference immunity	EN 61000-6-2			
	Interference emission	EN 61000-6-4			
Vibration resistance (IEC 68-2-6)		5-26 Hz / 0.75 mm			
Shock resistance (IEC 68-2-27)		15 g / 11 ms			
Isolation data					
Rated insulation voltage		300 V AC			
Pollution degree		3			

• Approvals62



Content

Ordering details	
CM-ENE MIN, CM-ENE MAX.....	124
CM-ENS	125
CM-ENS UP/DOWN.....	126
CM-ENN.....	127
CM-ENN UP/DOWN	128
Accessories for liquid level relays	129
Technical data	
CM-ENE MIN, CM-ENE MAX.....	130
CM-ENS, CM-ENS UP/DOWN	131
CM-ENN, CM-ENN UP/DOWN.....	132
Approvals and marks	62
Technical diagrams.....	144
Dimensional drawings	145
Accessories	146

Liquid level relays

CM-ENE MIN, CM-ENE MAX

Ordering details

2



CM-ENE MIN



CM-ENE MAX

① R: yellow LED - relay status


The liquid level relays CM-ENE MIN and CM-ENE MAX are used to monitor levels of conductive liquids, for example in pump control systems for dry-running or overflow monitoring.

The measuring principle is based on the occurring resistance change when moistening single-pole electrodes. The single-pole electrodes (see also section Accessories) are connected to the terminals C and MIN or MAX.


If the supply voltage is applied to A1-A2 and the electrodes are wet, the output relay of the CM-ENE MIN is energized and the output relay of the CM-ENE MAX is de-energized.

The output relay of the CM-ENE MIN de-energizes if the electrodes are no longer wet. The output relay of the CM-ENE MAX energizes if the electrodes are no longer wet.


Function diagram CM-ENE MIN

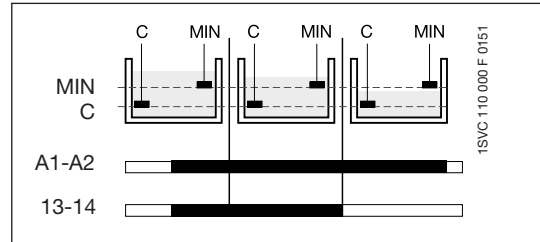


Connection diagram CM-ENE MIN

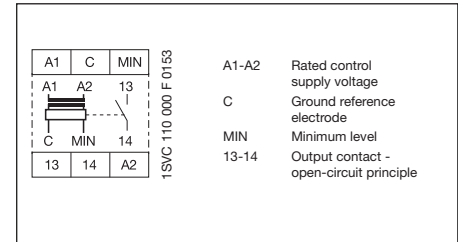

Function diagram CM-ENE MAX

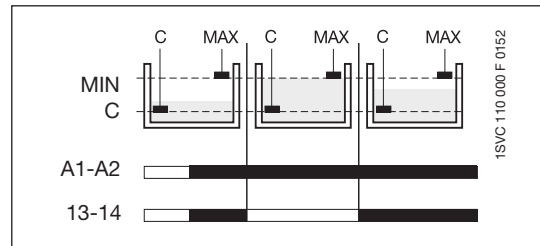


Connection diagram CM-ENE MAX

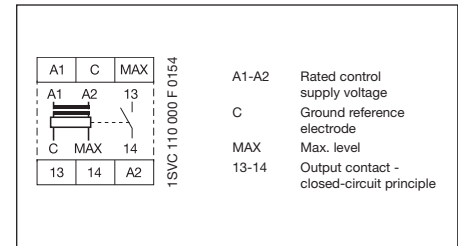

If a metal tank is used, the ground reference electrode C is not required. In this case the cable can be connected directly to the metal surface of the tank.

Application examples

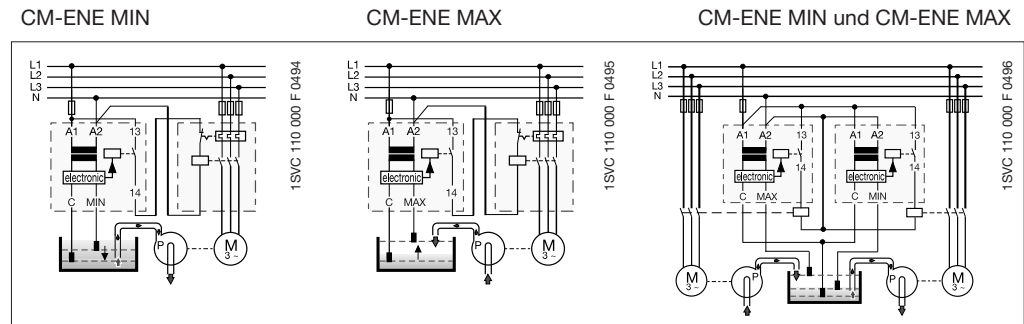

- Monitoring of pump systems for dry running (ENE MIN) and overflow (ENE MAX)
- Connection of 2 electrodes possible at C and MIN/MAX
- 3 supply voltage versions
- Optimal price/performance ratio
- 1 n/o contact:
Open-circuit principle for CM-ENE MIN
- Closed-circuit principle for CM-ENE MAX
- LED for status indication

Suitable for	Not suitable for
spring water drinking water sea water sewage	chemically pure water fuel oils explosive areas (liquid gas)
acids, bases liquid fertilizers milk, beer, coffee non-concentrated alcohol ...	ethylene glycol concentrated alcohol paraffin lacquers ...

Type	Rated control supply voltage	Order code	Pack. unit pieces	Price 1 piece	Weight 1 piece kg / lb
CM-ENE MIN	24 V AC	1SVR 550 855 R9500	1		0.15 / 0.33
	110-130 V AC	1SVR 550 850 R9500	1		0.15 / 0.33
	220-240 V AC	1SVR 550 851 R9500	1		0.15 / 0.33
CM-ENE MAX	24 V AC	1SVR 550 855 R9400	1		0.15 / 0.33
	110-130 V AC	1SVR 550 850 R9400	1		0.15 / 0.33
	220-240 V AC	1SVR 550 851 R9400	1		0.15 / 0.33

• Accessories 129 and 146 • Technical data 130 • Dimensional drawings 145

Liquid level relays

CM-ENS

Ordering details

1SVR 430 851 F 1100



CM-ENS

- ① "Sens." - sensitivity potentiometer for adjusting the response sensitivity
- ② R: yellow LED - relay status
- ③ U: green LED - control supply voltage
- ④ Marker label


The CM-ENS monitors levels of conductive liquids and is used for example for liquid level control in pump systems. It can be used for filling or draining tanks for example.

It is also suitable for monitoring the conductivity of liquids. The measuring principle is based on the resistance change sensed by single-pole electrodes. After the supply voltage is applied to the terminals A1 and A2, the output relay is de-energized. The probes must be connected to C, MAX, MIN.


The output relay energizes if the liquid exceeds the maximum level (C and MAX wet) and de-energizes if the liquid level is below the minimum level (MAX and MIN dry).

Based on the measuring circuit there will be a response delay of approx. 250 ms at maximum sensitivity. Different levels in one tank can be controlled by up to 5 CM-ENS without interfering with each other.



Function diagram CM-ENS

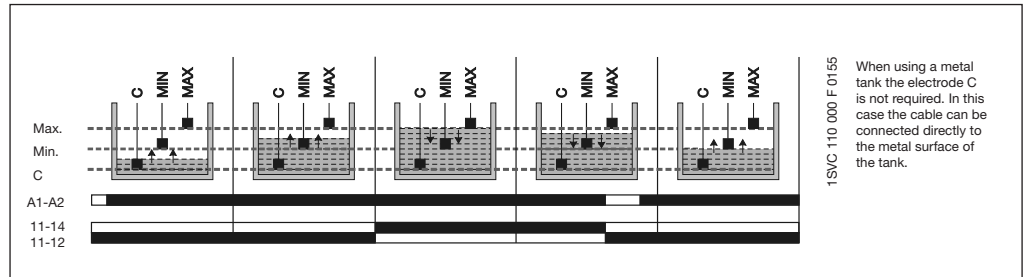

Application examples

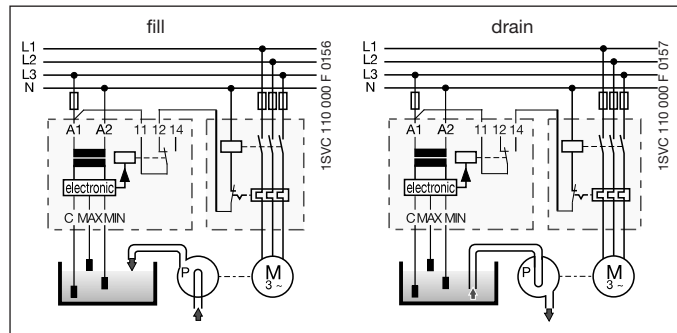

Connection diagram CM-ENS

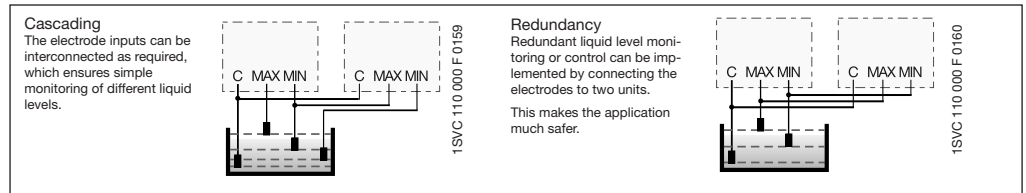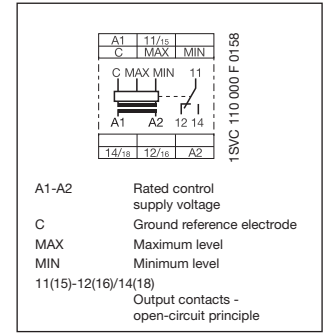

- Monitoring and control of liquid levels (when draining or filling liquids in tanks)
- Monitoring and control of mixture ratios (conductivity of liquids)
- Adjustable response sensitivity 5-100 kΩ
- 4 supply voltage versions 24 - 415 V AC
- Version with safe isolation acc. to VDE 0160
- Cascadable
- 1 c/o contact or 1 n/o and 1 n/c contact
- 2 LEDs for status indication

Suitable for	Not suitable for
spring water drinking water sea water sewage	chemically pure water fuel oils explosive areas (liquid gas)
acids, bases liquid fertilizers milk, beer, coffee non-concentrated alcohol ...	ethylene glycol concentrated alcohol paraffin lacquers ...

Type	Rated control supply voltage	Order code	Pack. unit pieces	Price 1 piece	Weight 1 piece kg / lb
CM-ENS	24 V AC	1SVR 430 851 R9100	1		0.15 / 0.33
	110-130 V AC	1SVR 430 851 R0100	1		0.15 / 0.33
	220-240 V AC	1SVR 430 851 R1100	1		0.15 / 0.33
	380-415 V AC	1SVR 430 851 R2100	1		0.15 / 0.33


Version with safety isolation acc. to VDE 0160, 1 n/o, 1 n/c

CM-ENS	220-240 V AC	1SVR 430 851 R1300	1		0.15 / 0.33
---------------	--------------	---------------------------	---	--	-------------

• Accessories	129 and 146	• Technical data	131
• Technical diagrams	144	• Dimensional drawings	145

Liquid level relays CM-ENS UP/DOWN

Ordering details



CM-ENS UP/DOWN

- ① "Func." - function selector switch:
"UP" - fill
"DOWN" - drain
- ② "Sens." - sensitivity potentiometer for adjusting the response sensitivity
- ③ R: yellow LED - relay status
- ④ U: green LED - control supply voltage
- ⑤ Marker label

The CM-ENS UP/DOWN monitors levels of conductive liquids and other media, and is used e.g. for liquid level control in pump systems.

The measuring principle is based on the resistance change sensed by single-pole electrodes.

The output relay functions fill (UP) or drain (DOWN) can be selected on a front-face selector switch.


If the "UP" function is selected, the output relay is energized until the MAX electrode becomes wet.

Then it is de-energized and not re-energized until the MIN electrode becomes dry.


If the "DOWN" function is selected, the output relay is energized as soon as the MAX electrode becomes wet. It remains energized until the liquid level has dropped below the MIN electrode.

The electrodes can be connected to more than one CM-ENS unit without interference.



Function diagram CM-ENS UP/DOWN

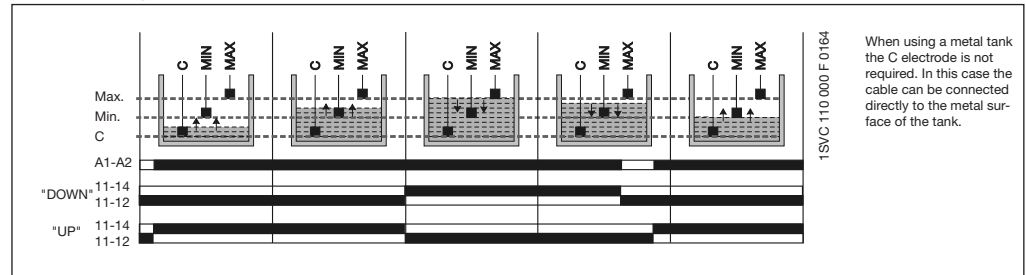

Application examples

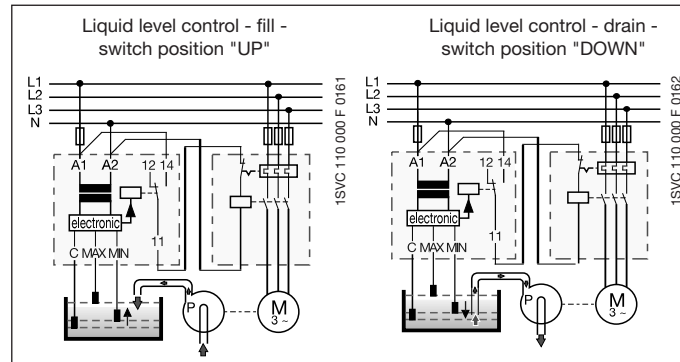

Connection diagram CM-ENS UP/DOWN

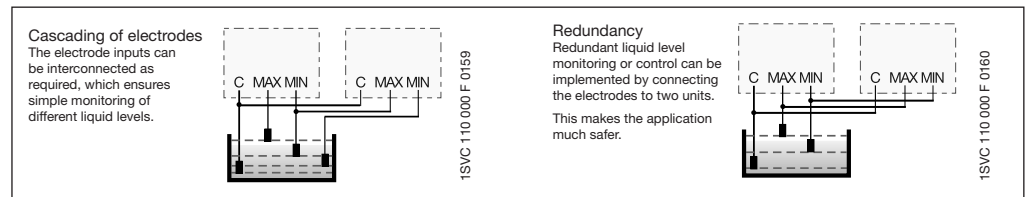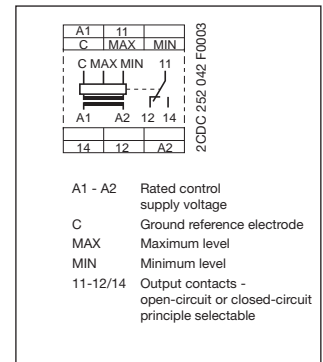

Suitable for		Not suitable for	
spring water	acids, bases	chemically pure water	ethylene glycol
drinking water	liquid fertilizers	fuel	concentrated alcohol
sea water	milk, beer, coffee	oils	paraffin
sewage	non-concentrated alcohol	explosive areas (liquid gas)	lacquers

- Monitoring and control of liquid levels
- Selectable function "fill" or "drain"
- Adjustable response sensitivity 5-100 kΩ
- Cascadable
- 1 c/o contact
- 2 LEDs for status indication

Type	Rated control supply voltage	Order code	Pack. unit pieces	Price 1 piece	Weight 1 piece kg / lb
CM-ENS UP/DOWN	24 V AC	1SVR 430 851 R9200	1		0.15/0.33
	110-130 V AC	1SVR 430 851 R0200	1		0.15/0.33
	220-240 V AC	1SVR 430 851 R1200	1		0.15/0.33

• Accessories 129 nd 146	• Technical data 131
• Technical diagrams 144	• Dimensional drawings 145

Liquid level relays

CM-ENN

Ordering details

1SVR 450 055 F0000



CM-ENN

- ① "Function" - time function selector switch:
 ON-delay
 OFF-delay
- ② "Sens.-sector" - measuring range selector switch
- ③ "Sens." - sensitivity potentiometer for adjusting the response sensitivity
- ④ "Time value" - fine adjustment of time delay
- ⑤ R: yellow LED - relay status
- ⑥ U: green LED - control supply voltage
- ⑦ Marker label


- Monitoring and control of liquid levels (when emptying or filling liquids in tanks)
- Monitoring and control of mixture ratios (conductivity of liquids)
- 3 response sensitivities from 250 Ω - 500 kΩ in one unit
- 5 supply voltage versions 24 V AC/DC - 415 V AC
- Selectable ON- or OFF-delay 0.1-10 s
- 2 c/o contacts
- 2 LEDs for status indication

The CM-ENN monitors levels of conductive liquids and is used for example for liquid level monitoring in pump control systems, for dry-running protection of submersible pumps or overflow monitoring of tanks. It is also suitable for conductivity monitoring of liquids.


The measuring principle is based on the resistance change sensed by single-pole electrodes (wet or dry). Instead of electrodes, other sensors or transducers can also be used if their output quantities are different resistance values. The measuring, output and supply circuits are electrically isolated for potential separation and to prevent electrical interference.

Due to the integrated ON- or OFF-delay, it is possible to set up time-dependent liquid controls using only two electrodes (C, MAX). Different liquid levels in one tank can be controlled by up to 5 CM-ENN (AC version) without mutual interference.


Function diagrams CM-ENN

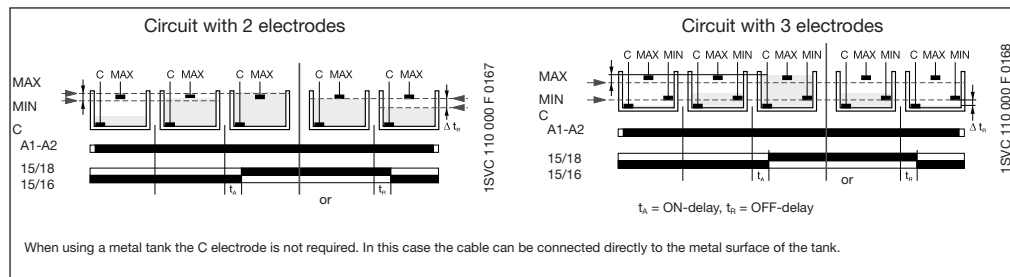

Application examples

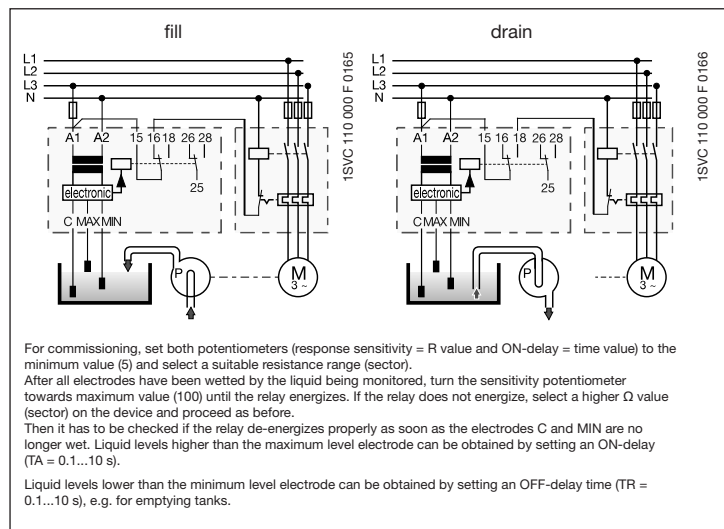

Connection diagram CM-ENN

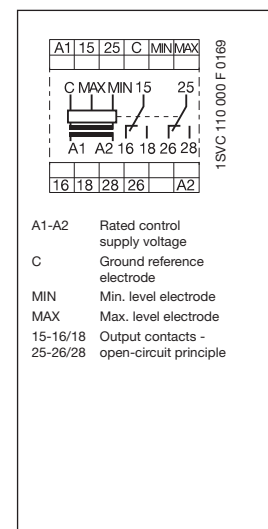

Typ	Rated control supply voltage	Order code	Pack. unit pieces	Price 1 piece	Weight 1 piece kg / lb
CM-ENN	24-240 V AC/DC	1SVR 450 055 R0000	1		0.30 / 0.66
	24 V AC	1SVR 450 059 R0000	1		0.30 / 0.66
	110-130 V AC	1SVR 450 050 R0000	1		0.30 / 0.66
	220-240 V AC	1SVR 450 051 R0000	1		0.30 / 0.66
	380-415 V AC	1SVR 450 052 R0000	1		0.30 / 0.66

Response sensitivity	Max. electrode current	Max. cable capacity	Max. cable length
250 Ω - 5 kΩ	8 mA	200 nF	1000 m
2.5-50 kΩ	2 mA	20 nF	100 m
25-500 kΩ	0.5 mA	4 nF	20 m

• Accessories 129 and 146	• Technical data 132
• Technical diagrams 144	• Dimensional drawings 145

Liquid level relays - Liquid level control with two alarm outputs - CM-ENN UP/DOWN

Ordering details



CM-ENN UP/DOWN


- ① "Func." - function selector switch:
"UP" - fill
"DOWN" - drain
- ② "Sens." - sensitivity potentiometer for adjusting the response sensitivity
- ③ R AL1: yellow LED - relay status AL1
- ④ R AL2: yellow LED - relay status AL2
- ⑤ R: MIN/MAX: yellow LED - relay status MIN/MAX
- ⑥ U: green LED - control supply voltage
- ⑦ Marker label

The CM-ENN UP/DOWN monitors levels of conductive liquids and media and is used e.g. for liquid level control in pump systems. The measuring principle is based on the resistance change sensed by single-pole electrodes.


The function of the output relay 11-12/14 can be selected by a selector switch on the front of the unit to fill "UP" or drain "DOWN". If the "UP" function is selected, the output relay is energized until the MAX electrode becomes wet. Then it is de-energized and not re-energized until the MIN electrode becomes dry. If the "DOWN" function is selected, the output relay is energized as soon as the MAX electrode becomes wet. It remains energized until the liquid level has dropped below the MIN electrode.

The electrode inputs AL1 and AL2 energize/de-energize the corresponding output relays RAL1 (21-22) and RAL2 (31-32). AL1 opens if contact RAL1 (21-22) is wet. AL2 closes if contact RAL2 (31-32) is wet. This way, two additional alarm outputs for exceeding or dropping below the normal level can be implemented in addition to the filling levels MAX and MIN.



Function diagram CM-ENN UP/DOWN

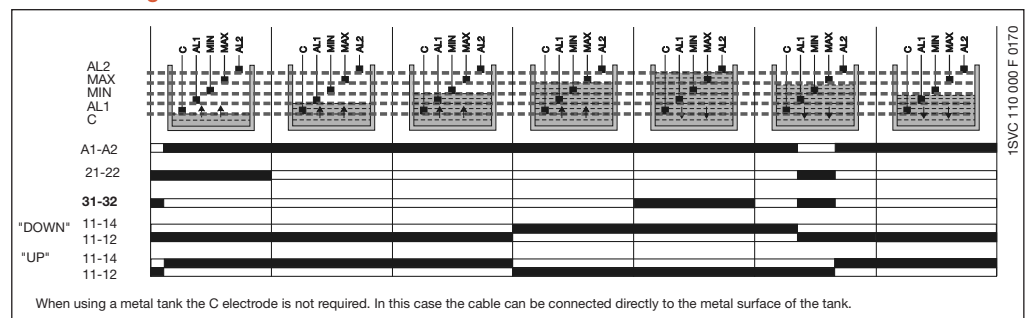


Application example

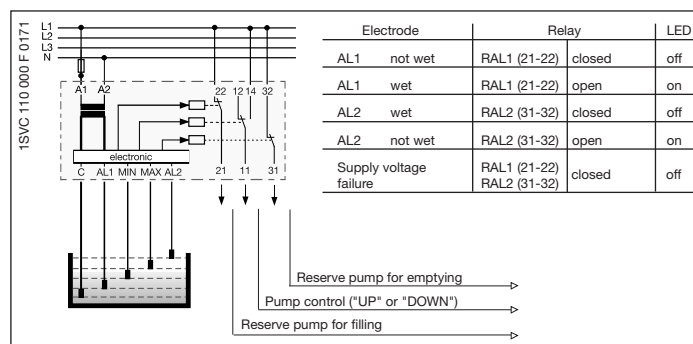

Connection diagram CM-ENN UP/DOWN

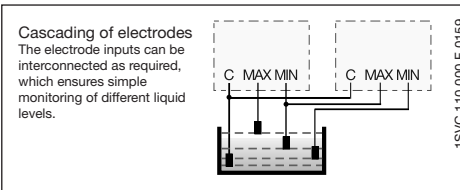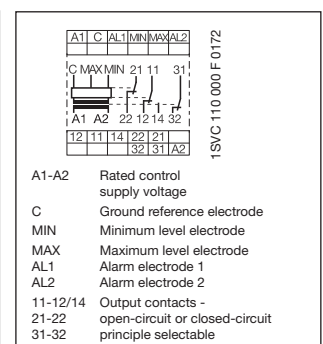

Redundancy
Redundant liquid level monitoring or control can be implemented by connecting the electrodes to two units. This makes the application much safer.



Suitable for

spring water
drinking water
sea water
sewage
acids, bases
liquid fertilizers
milk, beer, coffee
non-concentrated alcohol
...

Not suitable for

chemically pure water
fuel
oils
explosive areas (liquid gas)
ethylene glycol
concentrated alcohol
paraffin
lacquers
...

- Liquid level relay with 5 electrode inputs
- Level control with integrated overflow and dry-running protection
- Adjustable response sensitivity 5-100 kΩ
- Cascadable
- 1 c/o contact and 2 n/c contacts as alarm outputs
- 4 LEDs for status indication

Type	Rated control supply voltage	Order code	Pack. unit pieces	Price 1 piece	Weight 1 piece kg / lb
CM-ENN UP/DOWN	24 V AC	1SVR 450 059 R0100	1		0.15 / 0.33
	110-130 V AC	1SVR 450 050 R0100	1		0.15 / 0.33
	220-240 V AC	1SVR 450 051 R0100	1		0.15 / 0.33
	380-415 V AC	1SVR 450 052 R0100	1		0.15 / 0.33

• Accessories 129 and 146 • Technical data 132 • Technical diagrams 145
• Dimensional drawings 145

Liquid level relays - Accessories


Electrodes

Ordering details, dimensional drawings


Compact support CM-KH-3 for 3 bar electrodes

Dimensions in mm


- Ideally suited for use with liquid level relays CM-ENS and CM-ENN
- Wire connection by screw terminals
- Pull relief by M16 screwed cable glands
- Temperature range up to 90 °C
- Food safe material (PPH)
- Screw-in electrodes (M4 thread)
- Distance plate (CM-AH-3) and locking nut (CM-GM-1) optionally available as an accessory

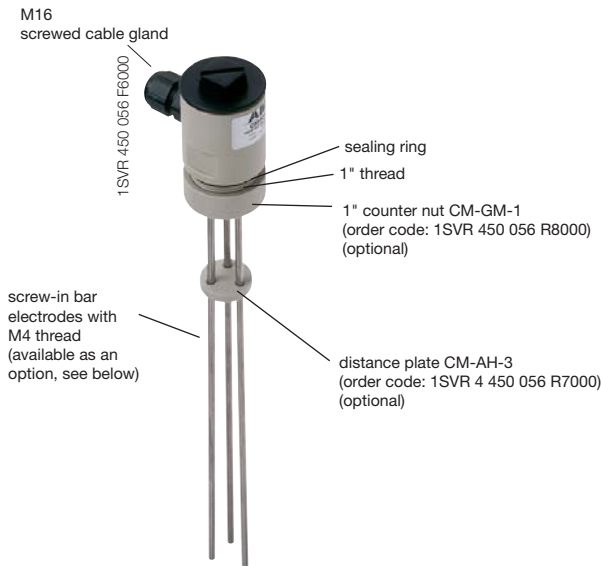


Compact support CM-KH-3

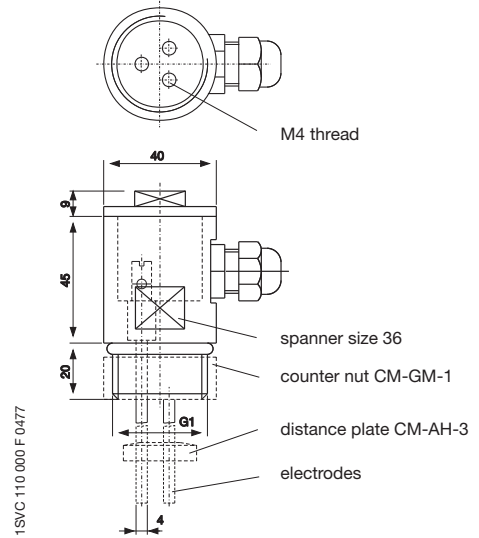

Distance plate CM-AH-3



Counter nut CM-GM-1




Technical data compact support


Type of mounting: G 1" thread
 Mounting position: any
 Enclosure material: PPH
 Sealing: NBR 70
 Temperature range: 90 °C max.
 Pressure: 10 bar max. (60 °C)

Type	Description	Order code	Pack. unit	Price 1 piece	Weight 1 piece kg / lb
CM-KH-3	Compact support for 3 bar electrodes	1SVR 450 056 R6000	1		0.06 / 0.132
CM-AH-3	Distance plate for 3 bar electrodes	1SVR 450 056 R7000	1		0.06 / 0.132
CM-GM-1	Counter nut for 1" thread	1SVR 450 056 R8000	1		0.06 / 0.132

Screw-in bar electrodes for compact support CM-KH-3



Suspension electrode CM-HE

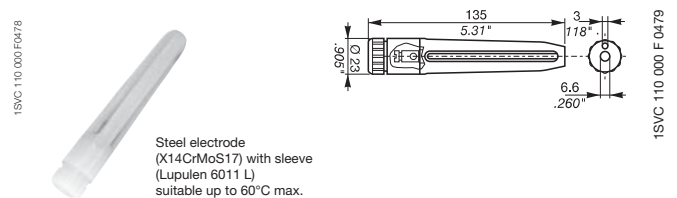

During project engineering the compatibility of the electrode material with the medium to be supervised is to be examined!

Type	Length	Order code	Pack. unit	Price 1 piece	Weight 1 piece kg / lb
CM-SE-300	300 mm	1SVR 450 056 R0000	1		0.08 / 0.176
CM-SE-600	600 mm	1SVR 450 056 R0100	1		0.08 / 0.176
CM-SE-1000	1000 mm	1SVR 450 056 R0200	1		0.08 / 0.176
CM-HE	-	1SVR 402 902 R0000	1		0.08 / 0.176

Liquid level relays

CM-ENE MIN, CM-ENE MAX

Technical data

Type		CM-ENE MIN	CM-ENE MAX
Supply circuit			
Rated control supply voltage U_s - power consumption	A1-A2	24 V AC	approx. 1.5 VA
	A1-A2	110-130 V AC	approx. 1.2 VA
	A1-A2	220-240 V AC	approx. 1.4 VA
Rated control supply voltage U_s tolerance		-15...+15 %	
Rated frequency		50-60 Hz	
Duty time		100 %	
Measuring circuit			
Monitoring function		dry-running protection	overflow protection
Response sensitivity		0-100 k Ω , not adjustable	
Maximum electrode voltage		30 V AC	
Maximum electrode current		1.5 mA	
Electrode supply line	max. cable capacity	3 nF	
	max. cable length	30 m	
Timing circuit			
Time delay		-	
Tripping delay		fixed approx. 200 ms	
Indication of operational states			
Output relay energized		R: yellow LED	
Output circuits			
Kind of output		1 n/o contact	
Operational principle ¹⁾		open-circuit principle	closed-circuit principle
Contact material		AgCdo	
Rated voltage (VDE 0110, IEC 60947-1)		250 V	
Minimum switching voltage / minimum switching current		- / -	
Maximum switching voltage		250 V	
Rated operational current (IEC 60947-5-1)	AC12 (resistive) 230 V	4 A	
	AC15 (inductive) 230 V	3 A	
	DC12 (resistive) 24 V	4 A	
	DC13 (inductive) 24 V	2 A	
AC rating (UL 508)	Utilization category (Control Circuit Rating Code)	B 300	
	max. rated operational voltage	300 V AC	
	max. continuous thermal current at B 300	5 A	
	max. making/breaking apparent power at B 300	3600/360 VA	
Mechanical lifetime		30 x 10 ⁶ switching cycles	
Electrical lifetime (AC12, 230 V, 4 A)		0.3 x 10 ⁶ switching cycles	
Short-circuit proof, maximum fuse rating	n/c contact	-	
	n/o contact	10 A fast-acting	
General data			
Dimensions (W x H x D)		22.5 x 78 x 78.5 mm (0.89 x 3.07 x 3.09 in)	
Mounting position		any	
Degree of protection	enclosure / terminals	IP50 / IP20	
Ambient temperature range	operation / storage	-20...+60 °C / -40...+85 °C	
Mounting		DIN rail (EN 50022)	
Electrical connection			
Wire size	fine-strand with wire-end ferrule	2 x 0.75-1.5 mm ² (2 x 18-16 AWG)	
	fine-strand without wire-end ferrule	2 x 1-1.5 mm ² (2 x 18-16 AWG)	
	rigid	2 x 0.75-1.5 mm ² (2 x 18-16 AWG)	
Stripping length		10 mm (0.39 inch)	
Tightening torque		0.6-0.8 Nm	
Standards			
Product standard		IEC 255-6, EN 60255-6	
Low Voltage Directive		2006/95/EC	
EMC Directive		2004/108/EC	
Electromagnetic compatibility		EN 61000-6-2, EN 61000-6-4	
electrostatic discharge (ESD)	acc. to IEC/EN 61000-4-2	Level 3 (6 kV / 8 kV)	
electromagnetic field (HF radiation resistance)	acc. to IEC/EN 61000-4-3	Level 3 (10 V/m)	
fast transients (Burst)	acc. to IEC/EN 61000-4-4	Level 3 (2 kV / 5 kHz)	
powerful impulses (Surge)	acc. to IEC 1000-4-5, EN 61000-4-5	Level 4 (2 kV L-L)	
HF line emission	acc. to IEC 1000-4-6, EN 61000-4-6	Level 3 (10 V)	
Resistance to vibration (IEC 68-2-6)		6 g	
Mechanical resistance (IEC 68-2-6)		10 g	
Isolation data			
Rat. insulation volt. betw. supply, meas. & output circuit (VDE 0110, IEC 60947)		250 V	
Rated impulse withstand voltage between all isolated circuits (VDE 0110, IEC 664)		4 kV / 1.2-50 μ s	
Test voltage between all isolated circuits		2.5 kV, 50 Hz, 1 min.	
Pollution category (VDE 0110, IEC 664, IEC 255-5)		3 / C	
Overvoltage category (VDE 0110, IEC 664, IEC 255-5)		III / C	
Environmental testing (IEC 68-2-30)		24 h cycle time, 55 °C, 93 % rel., 96 h	

¹⁾ Open-circuit principle: Output relay energizes if the measured value exceeds/drops below the adjusted threshold.
 Closed-circuit principle: Output relay de-energizes if the measured value exceeds/drops below the adjusted threshold.

• Approvals62

Liquid level relays

CM-ENS, CM-ENS UP/DOWN

Technical data

Type		CM-ENS	CM-ENS UP/DOWN
Supply circuit			
Rated control supply voltage U_s - power consumption	A1-A2	24 V AC	24 V AC
	A1-A2	110-130 V AC approx. 1.5 VA	110-130 V AC approx. 4 VA
	A1-A2	220-240 V AC approx. 1.5 VA	220-240 V AC approx. 4 VA
	A1-A2	380-415 V AC approx. 1.5 VA	
Rated control supply voltage U_s tolerance		-15...+10 %	
Rated frequency		50-60 Hz	
Duty time		100 %	
Measuring circuit			
Monitoring function		MAX-MIN-C	
Response sensitivity		liquid level control	
Maximum electrode voltage		5-100 k Ω , adjustable	
Maximum electrode current		30 V AC	
Electrode supply line	max. cable capacity	1 mA	
	max. cable length	10 nF	
		100 m	
Timing circuit			
Time delay		-	
Tripping delay		approx. 250 ms	
Indication of operational states			
Control supply voltage		U: green LED	
Output relay energized		R MAX/MIN: yellow LED	
Alarm relay AL1		-	R AL1: yellow LED
Alarm relay AL2		-	R AL2: yellow LED
Output circuits			
		11-12/14, 21-22, 31-32	
Kind of output		1 c/o contact, 1 n/o + 1 n/c contact ²⁾	
Operational principle ¹⁾		open-circuit principle	open- and closed-circuit principle
Contact material		AgCdo	
Rated voltage (VDE 0110, IEC 60947-1)		250 V	
Minimum switching voltage / minimum switching current		- / -	
Maximum switching voltage		250 V	
Rated operational current (IEC 60947-5-1)	AC12 (resistive) 230 V	4 A	
	AC15 (inductive) 230 V	3 A	
	DC12 (resistive) 24 V	4 A	
	DC13 (inductive) 24 V	2 A	
AC rating (UL 508)	Utilization category (Control Circuit Rating Code)	B 300	
	max. rated operational voltage	300 V AC	
	max. continuous thermal current at B 300	5 A	
	max. making/breaking apparent power at B 300	3600/360 VA	
Mechanical lifetime		30 x 10 ⁶ switching cycles	
Electrical lifetime (AC12, 230 V, 4 A)		0.3 x 10 ⁶ switching cycles	
Short-circuit proof, maximum fuse rating	n/c / n/o contact	10 A (4 A ²⁾ fast-act. / 10 A (6 A ²⁾ fast-act.	10 A fast-acting / 10 A fast-acting
General data			
Dimensions (W X H X D)		22.5 x 70 x 100 mm (0.89 x 3.07 x 3.94 in)	
Mounting position		any	
Degree of protection	enclosure / terminals	IP50 / IP20	
Ambient temperature range	operation / storage	-20...+60 °C / -40...+85 °C	
Mounting		DIN rail (EN50022)	
Electrical connection			
Wire size	fine-strand with wire end ferrule	2 x 2.5 mm ² (2 x 14 AWG)	
Standards			
Product standard		IEC 255-6, EN 60255-6	
Low Voltage Directive		2006/95/EG	
EMC Directive		2004/108/EG	
Electromagnetic compatibility		-	
electrostatic discharge (ESD)	IEC/EN 61000-4-2	Level 3 (6 kV / 8kV)	
electromagnetic field (HF radiation resistance)	IEC/EN 61000-4-3	Level 3 (10 V/m)	
fast transients (Burst)	IEC/EN 61000-4-4	Level 3 (2 kV / 5 kHz)	
powerful impulses (Surge)	IEC 1000-4-5, EN 61000-4-5	Level 4 (2 kV L-L)	
HF line emission	IEC 1000-4-6, EN 61000-4-6	Level 3 (10 V)	
Resistance to vibration (IEC 68-2-6)		4 g	
Mechanical resistance (IEC 68-2-6)		6 g	
Isolation data			
Rated insulation voltage between supply, measuring and output circuit (VDE 0110, IEC 60947)		250 V	
Rated impulse withstand voltage between all isolated circuits (VDE 0110, IEC 664)		4 kV / 1.2 - 50 μ s	
Test voltage between all isolated circuits		2.5 kV, 50 Hz, 1 min.	
Pollution category (VDE 0110, IEC 664, IEC 255-5)		3 / C	
Overvoltage category (VDE 0110, IEC 664, IEC 255-5)		III / C	
Environmental testing (IEC 68-2-30)		24 h cycle time, 55 °C, 93 % rel., 96 h	

¹⁾ Open-circuit principle: Output relay energizes if the measured value exceeds/drops below the adjusted threshold.

²⁾ Closed-circuit principle: Output relay de-energizes if the measured value exceeds/drops below the adjusted threshold.

²⁾ 1SVR 430 851 R1300 (version with safe isolation)

• Approvals62



Liquid level relays

CM-ENN UP/DOWN, CM-ENN

Technical data

Type	CM-ENN UP/DOWN		CM-ENN	
Supply circuit				
Rated control supply voltage U_s - power consumption	A1-A2	24 V AC	24 V AC	
	A1-A2	110-130 V AC approx. 1.5 VA	110-130 V AC approx. 2.5 VA	
	A1-A2	220-240 V AC approx. 1.5 VA	220-240 V AC approx. 3 VA	
	A1-A2	380-415 V AC approx. 1.5 VA	380-415 V AC approx. 4 VA	
	A1-A2		24-240 V AC/DC approx. 2 VA/W	
Rated control supply voltage U_s tolerance			-15...+10 %	
Rated frequency		50-60 Hz	50-60 Hz oder DC	
Duty time			100 %	
Measuring circuit				
Monitoring function			MAX-MIN-C	
Response sensitivity			liquid level control	
		adjustable 5-100 k Ω	adjustable 250 Ω - 5 k Ω	adjustable 2.5-50 k Ω 25-500 k Ω
Maximum electrode voltage		30 V AC	20 V AC	
Maximum electrode current		1 mA	8 mA	2 mA 0.5 mA
Electrode supply line	max. cable capacity	10 nF	200 nF	20 nF 4 nF
	max. cable length	100 m	1000 m	100 m 20 m
Timing circuit				
Time delay		-	0.1-10 s, adjustable, ON- or OFF-delay	
Tripping delay		approx. 250 ms	-	
Indication of operational states				
Control supply voltage			U: green LED	
Output relay energized		R MAX/MIN: yellow LED	R: yellow LED	
Output circuits				
Kind of output		11-12/14, 21-22, 31-32	15-16/18, 25-26/28	
Operational principle ¹⁾		1 c/o + 2 n/c contacts	2 c/o contacts	
Contact material		open-circuit principle	open- and closed-circuit principle	
Rated voltage (VDE 0110, IEC 60947-1)		250 V	400 V	
Minimum switching voltage / minimum switching current		- / -		
Maximum switching voltage		250 V	400 V	
Rated operational current (IEC 60947-5-1)	AC12 (resistive) 230 V	4 A	5 A	
	AC15 (inductive) 230 V		3 A	
	DC12 (resistive) 24 V	4 A	5 A	
	DC13 (inductive) 24 V	2 A	2.5 A	
AC rating (UL 508)	Utilization category (Control Circuit Rating Code)		B 300	
	max. rated operational voltage		300 V AC	
	max. continuous thermal current at B 300		5 A	
	max. making/breaking apparent power at B 300		3600/360 VA	
Mechanical lifetime			30 x 10 ⁶ switching cycles	
Electrical lifetime (AC12, 230 V, 4 A)		0.3 x 10 ⁶ switching cycles	0.1 x 10 ⁶ switching cycles	
Short-circuit proof, maximum fuse rating	n/c / n/o contact		4 A fast-acting / 6 A fast-acting	
General data				
Dimensions (W X H X D)		45 x 78 x 100 mm (1.77 x 3.07 x 3.94 in)		
Mounting position		any		
Degree of protection	enclosure / terminals	IP50 / IP20		
Ambient temperature range	operation / storage	-25...+65 °C / -40...+85 °C		
Mounting		DIN rail (EN50022)		
Electrical connection				
Wire size	fine-strand with wire end ferrule	2 x 2.5 mm ² (2 x 14 AWG)		
Standards				
Product standard		IEC 255-6, EN 60255-6		
Low Voltage Directive		2006/95/EG		
EMC Directive		2004/108/EG		
Electromagnetic compatibility		-		
electrostatic discharge (ESD)	IEC/EN 61000-4-2	Level 3 (6 kV / 8kV)		
electromagnetic field (HF radiation resistance)	IEC/EN 61000-4-3	Level 3 (10 V/m)		
fast transients (Burst)	IEC/EN 61000-4-4	Level 3 (2 kV / 5 kHz)		
powerful impulses (Surge)	IEC 1000-4-5, EN 61000-4-5	Level 4 (2 kV L-L)		
HF line emission	IEC 1000-4-6, EN 61000-4-6	Level 3 (10 V)		
Resistance to vibration (IEC 68-2-6)		5 g		
Mechanical resistance (IEC 68-2-6)		10 g		
Isolation data				
Rated insulation voltage between supply, measuring and output circuit (VDE 0110, IEC 60947)		250 V	500 V	
Rated impulse withstand voltage between all isolated circuits (VDE 0110, IEC 664)		4 kV / 1.2 - 50 μ s		
Test voltage between all isolated circuits		2.5 kV, 50 Hz, 1 min.		
Pollution category (VDE 0110, IEC 664, IEC 255-5)		3 / C		
Overvoltage category (VDE 0110, IEC 664, IEC 255-5)		III / C		
Environmental testing (IEC 68-2-30)		24 h cycle time, 55 °C, 93 % rel., 96 h		

¹⁾ Open-circuit principle: Output relay energizes if the measured value exceeds/drops below the adjusted threshold.
 Closed-circuit principle: Output relay de-energizes if the measured value exceeds/drops below the adjusted threshold.

• Approvals62



Contact protection relays

Sensor interface relay

Content

Ordering details	
CM-KRN.....	134
CM-SIS	135
Technical data	
CM-KRN.....	136
CM-SIS	137
Approvals and marks	62
Technical diagrams.....	144
Dimensional drawings	145
Accessories	146

Contact protection relay CM-KRN

Ordering details

2



CM-KRN

- ① Time range selector switch
- ② Response (ON-)delay
- ③ U: green LED - control supply voltage
- ④ R: yellow LED - relay status
- ⑤ Marker label

- Protects and reduces load from sensitive control contacts
- Adjustable ON-delay 0.05-30 s
- Acts as two-position switch
- Stores switch positions
- Electrically isolated circuits
- 2 c/o contacts
- 2 LEDs for status indication

The CM-KRN protects sensitive control contacts from excessive load. It can be used with latching function or without. Bounce time of control contacts can be bypassed by the adjustable response delay time.

Use for contact protection


The contact to be protected is connected to terminals Y1 and Y2.

Use for contact protection with latching capacity


The output relay energizes after contact Y1-Y3 has been closed for at least 20 ms. It remains energized until contact Y1-Y4 closes. The switching positions are stored.

The relay is suitable for load reduction purposes for devices with minimum and maximum contacts. The CM-KRN can be operated via 3-wire proximity sensors for switching of higher power. The supply circuit, the control circuit and the output circuit are electrically isolated against each other.



Function diagram CM-KRN

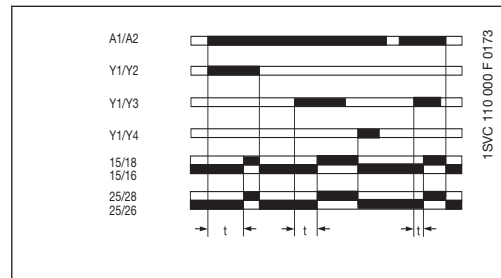

Connection diagram CM-KRN

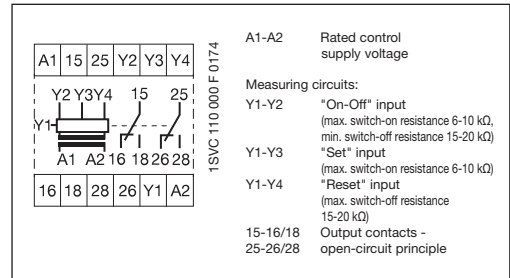

Use, applications

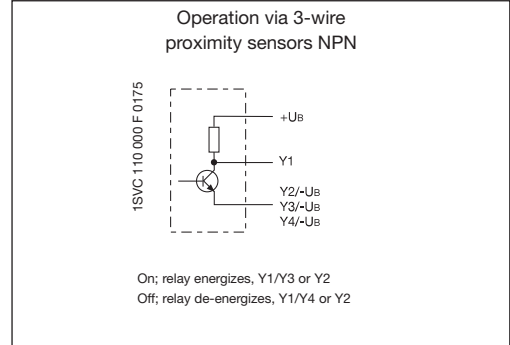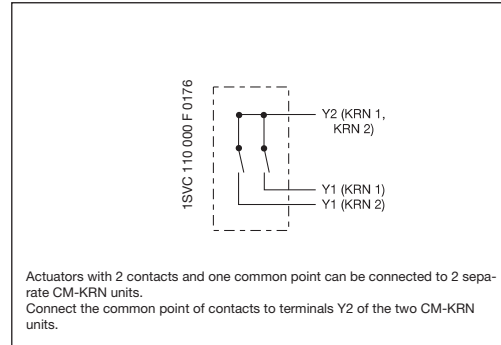

Type	Rated control supply voltage 50-60 Hz	Order code	Pack. unit pieces	Price 1 piece	Weight 1 piece kg / lb
------	--	------------	-------------------	---------------	------------------------

with timing circuit 0.05-30 s

CM-KRN	24 V AC	1SVR 450 089 R0000	1		0.30 / 0.66
	110-130 V AC	1SVR 450 080 R0000	1		0.30 / 0.66
	220-240 V AC	1SVR 450 081 R0000	1		0.30 / 0.66
	380-415 V AC	1SVR 450 082 R0000	1		0.30 / 0.66

without timing circuit


CM-KRN	24 V AC	1SVR 450 099 R0000	1		0.30 / 0.66
	110-130 V AC	1SVR 450 090 R0000	1		0.30 / 0.66
	220-240 V AC	1SVR 450 091 R0000	1		0.30 / 0.66
	24 V AC/DC ¹⁾	1SVR 450 099 R1000	1		0.30 / 0.66

¹⁾ not electrically isolated

• Technical data136	• Technical diagrams144	• Dimensional drawings145
• Accessories146		

Sensor interface relay CM-SIS

Ordering details



CM-SIS

- ① Rotary switch for sensor type selection
- ② U: green LED - control supply voltage
- ③ R1: red LED - relay status R1
- ④ R2: red LED - relay status R2
- ⑤ Marker label

- High efficiency
- Low heating
- Wide range of supply voltage
- Constant output voltage 24 V DC
- Safe isolation acc. to EN 50178 (VDE 0160)
- Short-circuit and overload proof
- Input protected by internal fuse
- 2 x 1 c/o contact
- 3 LEDs for status indication

The CM-SIS is used to supply 2- or 3-wire NPN or PNP sensors with power and to evaluate their switching signals. Two sensors of the types NPN or PNP can be connected simultaneously. Selection is done via the front-face rotary switch.


The CM-SIS (terminals L+, L-) supplies the connected sensors with voltage (24 V DC), the maximum power supply current is 0.5 A. The supply voltage and the sensor inputs are electrically isolated from the supply circuit. To ensure maximum safety when using these sensors, the principle of safe isolation has been included.

Each sensor input signal energizes the corresponding output relay without delay. The relay is energized as soon as a threshold current is exceeded at input I1 or I2. Sensor leakage currents of up to 8 mA don't affect the evaluation. The threshold value is about 9 mA. If the threshold value at input I1 or I2 is exceeded the corresponding relay R1 or R2 energizes and the corresponding LED lights up.


The wide-range supply voltage input of CM-SIS allows its application in nearly all supply systems.

The CM-SIS is also suitable for other applications, for example it is also possible to connect PTC or NTC resistors instead of PNP or NPN sensors or to operate the SIS directly by switching contacts.


Function diagram CM-SIS

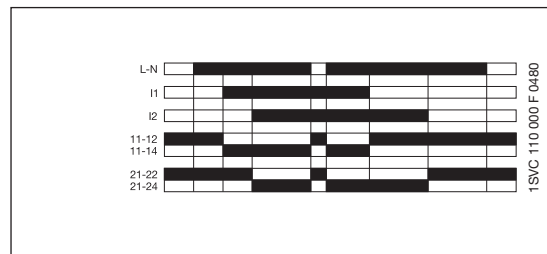


Connection diagram CM-SIS

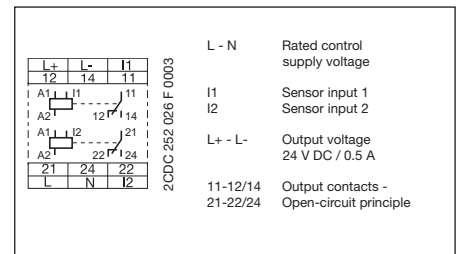

Connection of 2-wire sensors

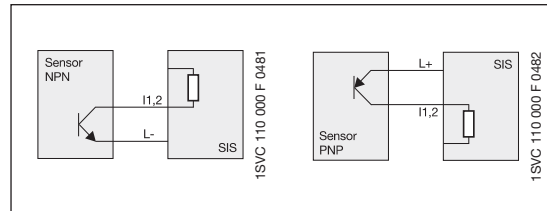

Connection of 3-wire sensors

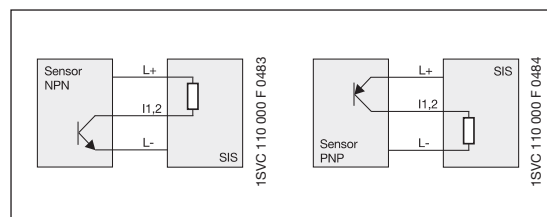



Type	Rated control supply voltage 50-60 Hz	Order code	Pack. unit pieces	Price 1 piece	Weight 1 piece kg / lb
CM-SIS	110-240 V AC / 105-260 V DC	1SVR 430 500 R2300	1		0.22 / 0.48

• Technical data136	• Technical diagrams144	• Dimensional drawings145
• Accessories146		

Contact protection relay

CM-KRN

Technical data




Type	CM-KRN	
Supply circuit	A1-A2	
Rated control supply voltage U_s - power consumption	A1-A2	24 V AC - approx. 3.5 VA
	A1-A2	24 V AC/DC - approx. 3.5 VA
	A1-A2	110-130 V AC - approx. 3,5 VA
	A1-A2	220-240 V AC - approx. 3.5 VA
	A1-A2	380-415 V AC - approx. 3.5 VA
Rated control supply voltage U_s tolerance		-15...+10 %
Rated frequency		50-60 Hz
Duty time		100 %
Timing circuit		
ON-delay time		0.05-1 s, 1.5-30 s
OFF-delay time		max. 50 ms
Measuring circuit / contact circuit	Y1-Y2/Y3/Y4	
Measuring input	contact protection without latching	Y1-Y2
	contact protection with latching	Y1-Y3/Y4
Threshold	Y1-Y2/Y3	6-10 k Ω
Threshold-Hysteresis	Y1-Y2/Y4	15-20 k Ω
No-load voltage at the measuring input		\leq 10 V DC
Contact time for latching (CM-KRN without timing circuit)		min. 20 ms
Switching current at the measuring input		3 mA
Maximum applied voltage at the measuring input		\leq \pm 30 V (contact voltage)
Indication of operational states		
Control supply voltage	U: green LED	 : control supply voltage applied
Relay status	R: yellow LED	 : output relay energized
Output circuit	15-16/18, 25-26/28	
Kind of output		relay, 2 c/o contacts
Operating principle ¹⁾		open-circuit principle
Rated operating voltage (VDE 0110, IEC 60947-5-1)		400 V
Rated switching voltage		400 V AC
Rated operational current (IEC 60974-5-1)	AC12 (resistive) 230 V	5 A
	AC15 (inductive) 230 V	3 A
	DC12 (resistive) 24 V	5 A
	DC13 (inductive) 24 V	2.5 A
AC rating (UL 508)	Utilization category (Control Circuit Rating Code)	B 300
	max. rated operational voltage	300 V AC
	max. continuous thermal current at B 300	5 A
	max. making/breaking apparent power at B 300	3600/360 VA
Mechanical lifetime		30 x 10 ⁶ switching cycles
Electrical lifetime (AC12, 230 V, 5 A)		0.1 x 10 ⁶ switching cycles
Short-circuit proof, maximum fuse rating	n/c / n/o contact	10 A fast-acting / 10 A fast-acting
General data		
Dimensions (W x H x D)		45 x 78 x 100 mm (1.77 x 3.07 x 3.94 in)
Mounting position		any
Degree of protection	enclosure / terminals	IP20 / IP50
Ambient temperature range	operation / storage	-25...+65 °C / -40...+85 °C
Mounting		DIN rail (EN 50022)
Electrical connection		
Wire size	fine-strand with wire end ferrule	2 x 2.5 mm ² (2 x 14 AWG)
Standards		
Product standard		IEC 255-6, EN 60255-6
Low Voltage Directive		2006/95/EC
EMC Directive		2004/108/EC
Electromagnetic compatibility		
Interference immunity		
electrostatic discharge (ESD)	IEC/EN 61000-4-2	6 kV / 8 kV
electromagnetic field (HF radiation resistance)	IEC/EN 61000-4-3	10 V/m
fast transients (Burst)	IEC/EN 61000-4-4	2 kV / 5 kHz
powerful impulses (Surge)	IEC/EN 61000-4-5	2 kV symmetrical
HF line emission	IEC/EN 61000-4-6	10 V
Isolation data		
Rated insulation voltage (IEC 60947-1)		400 V
Rated impulse withstand voltage U_{imp} (IEC 644-6)		4 kV
Pollution category (IEC 255-5, IEC 664)		3
Overvoltage category (IEC 255-5, IEC 664)		III

¹⁾ Open-circuit principle: Output relay is energized if the measured value exceeds/drops below the adjusted threshold.

Sensor interface relay

CM-SIS

Technical data

Type	CM-SIS	
Input circuit		
Supply voltage	L-N	AC DC
		110-240 V AC (-15...+10 %)
		110-240 V (max. 105-260 V DC)
Frequency, AC supply		47-440 Hz
Supply voltage failure bridging time		10 ms min. at 100 % load
Current consumption		max. 0.35 A
		at 115 V AC 0.27 A
		at 230 V AC 0.14 A
Inrush current at 25°C (≤ 2 ms)		33 A
Internal input fuse		800 mA slow-acting
Measuring circuit		
L+, L- / I1, I2		
Sensor voltage	L+ L-	24 V DC ± 3%
Sensor current / power		max. 0.5 A / 12 W
Residual ripple		max. 100 mV _{pp}
Deviation with	load change statical	max. ± 0.5 %
	load change dynamical 10-90 %	max. .5 %
	change of the input voltage	max. ± 0.5 %
Short-circuit protection		overcurrent switch-off with automatic restart
Overload protection		excess temperature and overcurrent switch-off
Reset after thermal overload switch-off		automatic reset after cooling down
Sensor type connection possibilities	I1, I2	2- or 3-wire connection, NPN or PNP selectable by front-face switch
Input resistance		approx. 2.5 kΩ
Threshold value for relays R1, R2		$U_{emitter-collector} < 2,3 \text{ V}$ (I1, I2 > 8 mA)
Maximum switching frequency		approx. 20 Hz
Output circuit		
11-12/14, 21-22/24		
Kind of output		2 relays, 1 c/o contact each
Operating principle ¹⁾		open-circuit principle
Rated operating voltage		250 V
Maximum switching voltage		250 V AC
Rated operational current (IEC 60947-5-1)	AC12 (resistive) 230 V	4 A
	AC15 (inductive) 230 V	3 A
	DC12 (resistive) 24 V	4 A
	DC13 (inductive) 24 V	2 A
AC rating (UL 508)	Utilization category (Control Circuit Rating Code)	B 300
	max. rated operational voltage	300 V AC
	max. continuous thermal current at B 300	5 A
	max. making/breaking apparent power at B 300	3600/360 VA
Mechanical lifetime		10 x 10 ⁶ switching cycles
Electrical lifetime		0.1 x 10 ⁶ switching cycles
Short-circuit proof, maximum fuse rating	n/c / n/o contact	6 A fast-acting / 10 A fast-acting
Indication of operational states		
Control supply voltage	U: green LED	 : control supply voltage applied
Relay status R1	R1: yellow LED	 : threshold value at input I1 exceeded
Relay status R2	R2: yellow LED	 : threshold value at input I2 exceeded
General data		
Efficiency at rated load		approx. 84 % (at 230 V AC)
Ambient temperature range	operation / storage	0...+55 °C / -25...+75 °C
Dimensions (W x H x D)		22.5 x 78 x 100 mm (0.89 x 3.07 x 3.94 in)
Mounting position		horizontally
Mounting		DIN rail
Minimum distance to other units		left-hand side 10 mm (0.39 in), vertical distance 50 mm (1.97 in)
Electrical connection		
Wire size		2 x 2,5 mm ² (2 x 14 AWG)
Standards		
Product standard		IEC 255-6, EN 60255-6
Electrical safety		IEC(EN) 60255-5, EN 50178 (VDE 0160), EN60950, UL 508, CSA 22.2
Galvanic isolation		safe isolation between L+,L-, I1,I2, and L,N,I1,I2,I4,I2,I2,I2,I4



Sensor interface module

CM-SIS

Technical data

2

Type		CM-SIS
Electromagnetic compatibility		
Interference immunity		EN 61000-6-2
electrostatic discharge (ESD)	EN 61000-4-2	Level 3 (6 / 8 kV)
electromagnetic field (HF radiation resistance)	EN 61000-4-3	Level 3 (10 V/m)
fast transients (Burst)	EN 61000-4-4	Level 4 (4 kV)
powerful impulses (Surge)	EN 61000-4-5	Inst. class 3 (2 kV)
HF line emission	EN 61000-4-6	Level 3 (10 V)
Interference emission	EN 50081-2	radiated noise EN 55011, class B
Input current harmonics		no limitation
Isolation data		
Insulation testing		2.5 kV AC (routine test), 3 kV AC (type test)
Degree of pollution		2
Overvoltage category		II

¹⁾ Open-circuit principle: Output relay is energized if the measured value exceeds/drops below the adjusted threshold.



Cycle monitor with watchdog function


Content

Ordering details	140
Technical data	141
Approvals and marks	62
Technical diagrams.....	144
Dimensional drawing.....	145
Accessories	146

Cycle monitoring relay with watchdog function CM-WDS

Ordering details

2



CM-WDS

- ① Setting the lower threshold value of cycle monitoring time
- ② F: red LED - cycle error
- ③ U: green LED - control supply voltage
- ④ Wiring diagram
- ⑤ Marker label


The cycle monitoring relay CM-WDS (watchdog) observes if a regularly intermittent pulse is applied to its pulse input "I". It is, for example, possible to connect the output of a programmable logic controller (plc), which is set and reset regularly (e. g. once each cycle). The connected cycle pulse must be generated by suitable programming of the plc/ipc. Now, the CM-WDS monitors if the cycle time of the plc/ipc program is smaller than the cycle monitoring time set by means of the front-face selector switch "time value (ms)".

The output relay 11-12/14 of the CM-WDS energizes and the red LED is switched off, if there are minimum 8 successive regular pulses on input "I". When the pulse signal stays out or is not regular, the output relay de-energizes and the red LED is illuminated.


In case the monitoring time is too short or too long, this can be adjusted by a modified programming of the plc/ipcs or by modified setting of the monitoring time "time value (ms)".

A fault recognized and stored with the CM-WDS can be reset by an H-impulse (0-1-transition) on the reset input "R(9)", so that the cycle monitoring is again released. The reset impulse can be generated by means of a reset button or by suitable programming of the controller (plc/ipc).


Funktion diagram CM-WDS

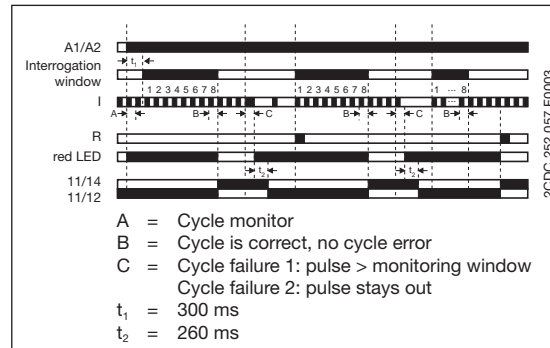

Connection diagram CM-WDS

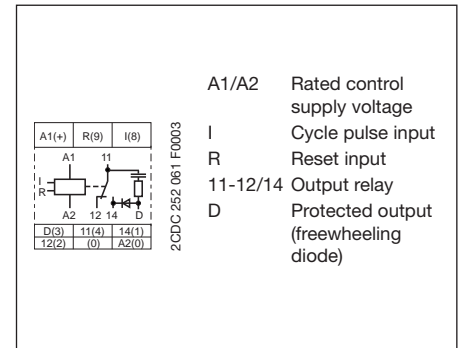

Example of application - circuit diagram

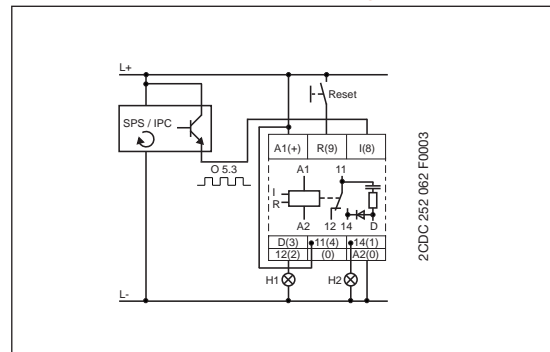

Application

The CM-WDS is designed for the external monitoring of the correct function of programmable logic controllers (plc) and industrial pcs (ipc).

- Cycle monitor for monitoring the function of programmable logic controllers or industrial pcs
- 4 selectable cycle monitoring time ranges from 0.5 to 1000 ms
- 24 V DC supply
- 1 c/o contact
- 2 LEDs for status indication

Type	Rated control supply voltage	Order code	Pack. unit pieces	Price 1 piece	Weight 1 piece kg / lb
CM-WDS	24 V DC	1SVR 430 896 R0000	1		0.15 / 0.33

• Technical data141	• Dimensional drawing145	• Accessories146
• Technical diagrams144		

Cycle monitoring relay with watchdog function

CM-WDS

Technical data

Type		CM-WDS
Input circuit		A1-A2
Rated control supply voltage U_s - power consumption	A1-A2	24 V DC - approx. 1 W
Tolerance of the rated control supply voltage U_s		-30 % - +30 %
Duty time		100 %
Measuring circuit		I
Monitoring function		cycle monitoring
Measuring voltage		24 V DC
Current consumption at the measuring input		approx. 5 mA
Setting range of cycle monitoring time		selectable: 0.5-150 ms, 0.5-260 ms, 0.5-500 ms, 0.5-1000 ms
Response time		approx. 0.5-1000 ms
Measuring error within the supply voltage tolerance		≤ 0.5 %
Measuring error within the temperature range		≤ 0.06 % / °C
Timing circuit		
ON-delay		approx. 2.2-10 s
Tripping delay		approx. 260 ms
Indication of operational states		
Control supply voltage		U: green LED
Output relay de-energized / cycle error		F: red LED
Output circuit		11-12/14
Kind of output		1 c/o
Operating principle ¹⁾		Closed-circuit principle
Contact material		AgCdo
Rated voltage (VDE 0110, IEC 60947-1)		250 V
Minimum switching voltage / Minimum switching current		
Maximum switching voltage		250 V AC, 250 V DC
Rated operational current (IEC 60947-5-1)	AC12 (resistive) 230 V	4 A
	AC15 (inductive) 230 V	3 A
	DC12 (resistive) 24 V	4 A
	DC13 (inductive) 24 V	2 A
AC rating (UL 508)	Utilization category (Control Circuit Rating Code)	B 300
	max. rated operational voltage	300 V AC
	max. continuous thermal current at B 300	5 A
	max. making/breaking apparent power at B 300	3600/360 VA
Mechanical lifetime		10 x 10 ⁶ switching cycles
Electrical lifetime (AC12, 230 V, 4 A)		0.1 x 10 ⁶ switching cycles
Short-circuit proof, maximum fuse rating	n/c / n/o contacts	10 A fast-acting / 10 A fast-acting
General data		
Dimensions (W x H x D)		22.5 x 78 x 100 mm (0.89 x 3.07 x 3.94 in)
Mounting position		any
Degree of protection	enclosure / terminals	IP50 / IP20
Ambient temperature range	operation / storage	-20...+60 °C / -40...+85 °C
Mounting		DIN rail (EN 50022)
Electrical connection		
Wire size	fine-strand with wire end ferrule	2 x 2.5 mm ² (2 x 14 AWG)
Standards		
Product standard		IEC 255-6, EN 60255-6
Low Voltage Directive		2006/95/EC
EMC Directive		2004/108/EC
Operational reliability (IEC 68-2-6)		4 g
Mechanical shock resistance (IEC 68-2-6)		6 g
Electromagnetic compatibility		
Interference immunity		EN 61000-6-2
electrostatic discharge (ESD)	IEC/EN 61000-4-2	Level 3 (6 kV / 8 kV)
electromagnetic field (HF radiation resistance)	IEC/EN 61000-4-3	Level 3 (10 V/m)
fast transients (Burst)	IEC/EN 61000-4-4	Level 3 (2 kV / 5 kHz)
powerful impulses (Surge)	IEC/EN 61000-4-5	Level 3 (2 kV L-L)
HF line emission	IEC/EN 61000-4-6	Level 3 (10 V)
Interference emission		EN 61000-6-4

Cycle monitoring relay with watchdog function

CM-WDS

Technical data

Isolation data	
Rated insulation voltage between supply-, control- and output circuit (VDE 0110, IEC 60947-1)	250 V
Rated impulse withstand between all isolated circuits (VDE 0110, IEC 664)	4 kV / 1.2-50 μs
Test voltage between all isolated circuits	2.5 kV, 50 Hz, 1 min
Pollution degree (VDE 0110, IEC 664, IEC 255-5)	3/C
Overvoltage category (VDE 0110, IEC 664, IEC 255-5)	III
Environmental tests (IEC 68-2-30)	24 h cycle, 55 °C, 93 % rel. 96 h

¹⁾ Closed-circuit principle: Output relay de-energizes if a cycle error occurs



General technical data, Accessories, Current transformers

Content

General technical data

Technical diagrams.....	144
Dimensional drawings	145

Accessories

Ordering data	146
---------------------	-----

Current transformer

Ordering data	147
---------------------	-----

Measuring and monitoring relays


CM range

Technical diagrams


Load limit curves

CM-S (22.5 mm) and CM-E (22.5 mm) range


AC load (resistive)

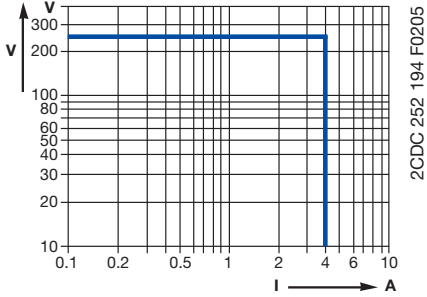


DC load (resistive)

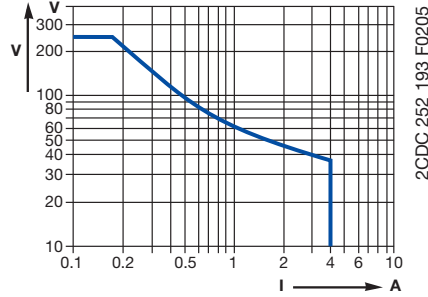

Derating factor F for inductive AC load

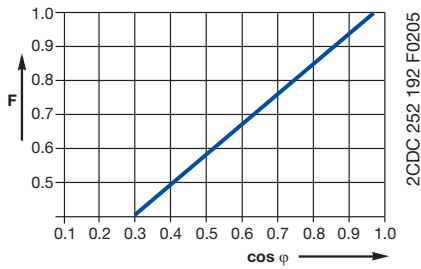


Contact lifetime

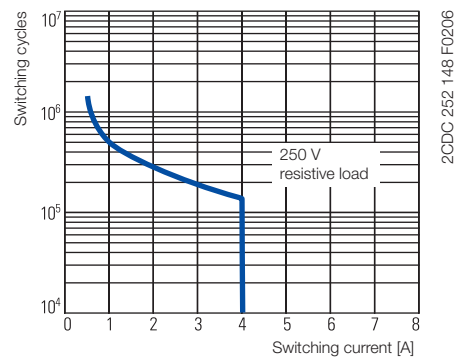


CM-N (45 mm) range


AC load (resistive)

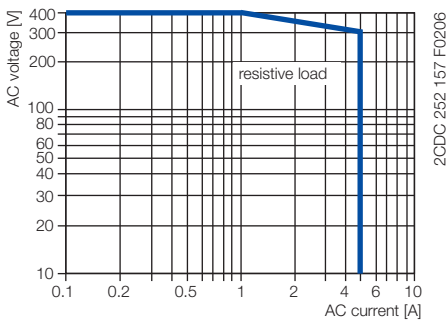


DC load (resistive)

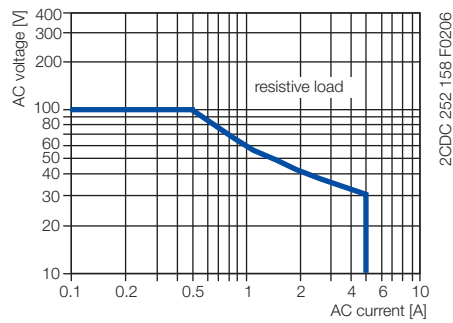

Derating factor F for inductive AC load

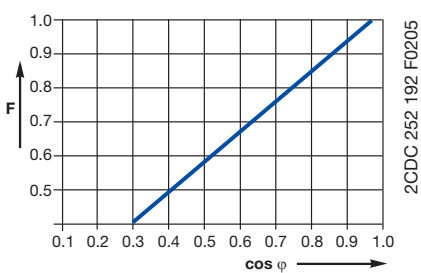

Contact lifetime

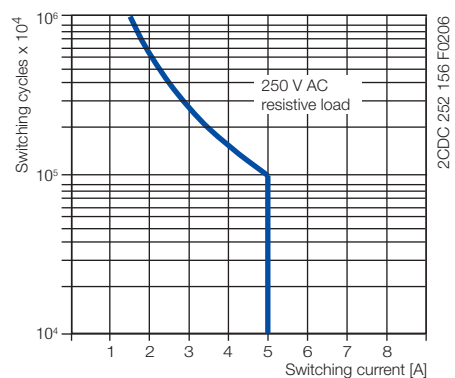





Measuring and monitoring relays CM and C51x Dimensional drawings

Dimensional drawings


Dimensions in mm

Measuring and monitoring relays CM range

Insulation monitors for ungrounded supply mains C558.xx

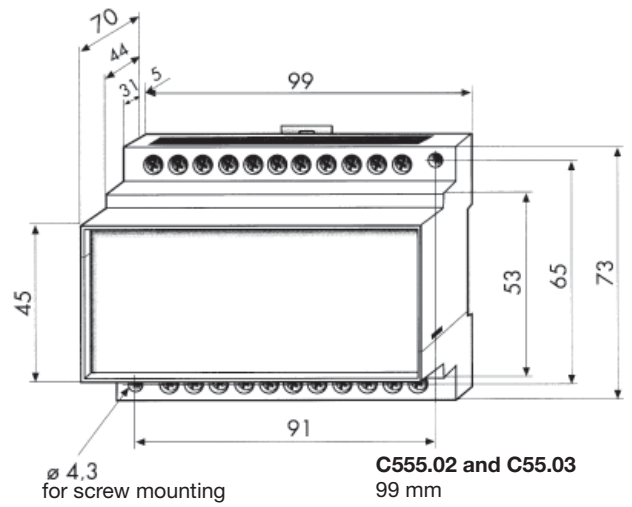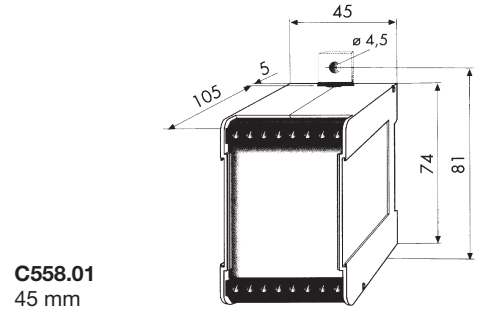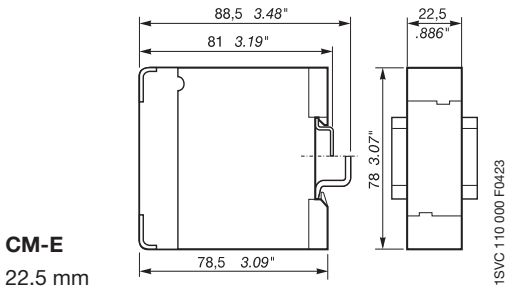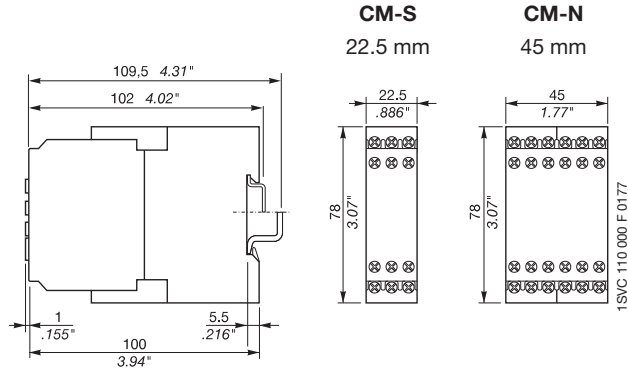


Temperature monitoring relays C51x range

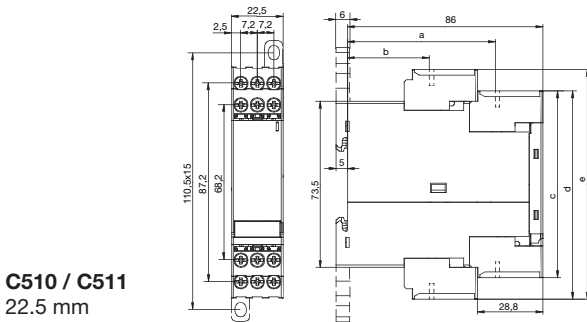

	C510, C511
	0,8 ... 1,2 Nm 7 ... 10,3 lb-in
	1 x 0,5 ... 4,0 mm ² 2 x 0,5 ... 2,5 mm ²
	2 x 0,5 ... 1,5 mm ² 1 x 0,5 ... 2,5 mm ²
	—
AWG	2 x 20 ... 14

2CDC 252 287 F0005

	a	b	c	d	e
C510, C511	65	36	82,6	92,2	101,6

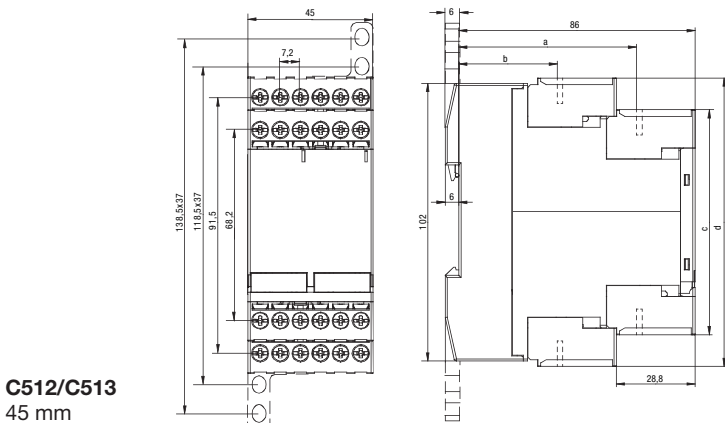

	C512 C513
	0,8 ... 1,2 Nm 7 ... 10,3 lb-in
	1 x 0,5 ... 4,0 mm ² 2 x 0,5 ... 2,5 mm ²
	2 x 0,5 ... 1,5 mm ² 1 x 0,5 ... 2,5 mm ²
	—
AWG	2 x 20 ... 14

2CDC 252 288 F0005


	a	b	c	d
C512, C513	65	36	82,6	105,9

Measuring and monitoring relays

Accessories for CM range

Ordering details

2

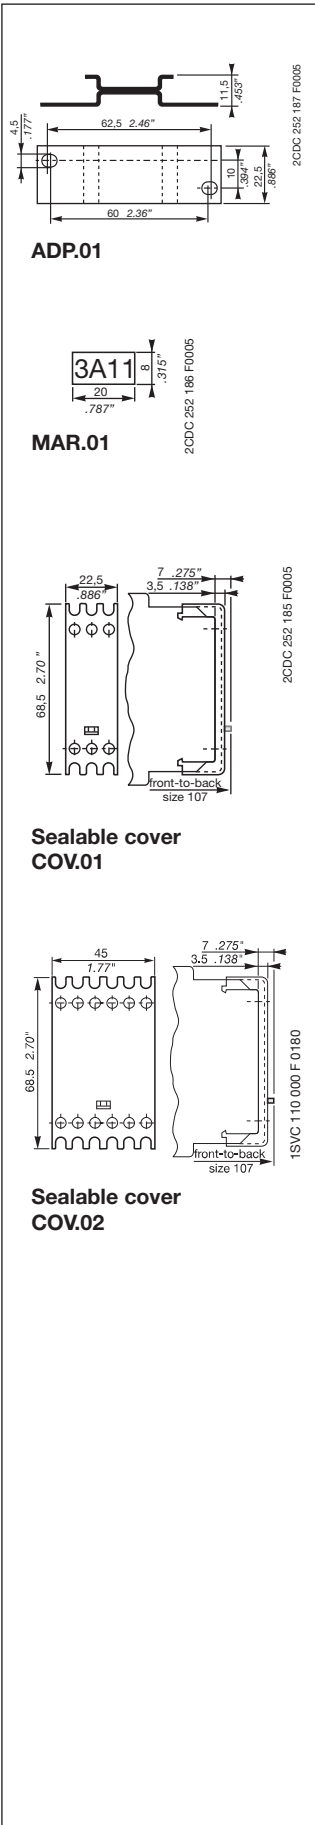

Accessories

Adapter for screw mounting

Type	for type	Width in mm	Order code	Pack. unit pieces	Price 1 piece	Weight 1 piece g / oz
ADP.01	CM-S	22.5	1SVR 430 029 R0100	1		18.4/0.65
ADP.02	CM-N	45.0	1SVR 440 029 R0100	1		36.7/1.30

Marker label

Type	for type	for devices	Order code	Pack. unit pieces	Price 1 piece	Weight 1 piece g / oz
MAR.01	CM-S, CM-N	without DIP switches	1SVR 366 017 R0100	10		0.19/0.007
MAR.02	CM-S, CM-N	with DIP switches	1SVR 430 043 R0000	10		0.13/0.005

Sealable transparent cover

Type	for type	Width in mm	Order code	Pack. unit pieces	Price 1 piece	Weight 1 piece g / oz
COV.01	CM-S	22.5	1SVR 430 005 R0100	1		5.2/0.18
COV.02	CM-N	45.0	1SVR 440 005 R0100	1		7.7/0.27

Accessories for measuring and monitoring relays

Current transformers CM-CT

Ordering details

2CDC 251 002 F0005



CM-CT

2CDC 251 003 F0005



CM-CT
with mounted accessories

2CDC 251 159 F0006



CM-CT-A
mounted on DIN rail

Plug-in current transformers CM-CT

- Without primary conductor though with foot angle, insulating protective cap and bar fastening screws
- Primary / rated current from 50 A to 600 A
- Secondary current of 1 A or 5 A
- Class 1

Secondary current 1 A

Type	Rated / primary current	Burden / class	Order code	Pack. unit pieces	Price 1 piece
CM-CT 50/1	50 A	1 VA / 1	1SVR 450 116 R1000	1	
CM-CT 75/1	75 A	1.5 VA / 1	1SVR 450 116 R1100	1	
CM-CT 100/1	100 A	2.5 VA / 1	1SVR 450 116 R1200	1	
CM-CT 150/1	150 A	2.5 VA / 1	1SVR 450 116 R1300	1	
CM-CT 200/1	200 A	2.5 VA / 1	1SVR 450 116 R1400	1	
CM-CT 300/1	300 A	5 VA / 1	1SVR 450 117 R1100	1	
CM-CT 400/1	400 A	5 VA / 1	1SVR 450 117 R1200	1	
CM-CT 500/1	500 A	5 VA / 1	1SVR 450 117 R1300	1	
CM-CT 600/1	600 A	5 VA / 1	1SVR 450 117 R1400	1	


Secondary current 5 A

Type	Rated / primary current	Burden / class	Order code	Pack. unit pieces	Price 1 piece
CM-CT 50/5	50 A	1 VA / 1	1SVR 450 116 R5000	1	
CM-CT 75/5	75 A	1.5 VA / 1	1SVR 450 116 R5100	1	
CM-CT 100/5	100 A	2.5 VA / 1	1SVR 450 116 R5200	1	
CM-CT 150/5	150 A	2.5 VA / 1	1SVR 450 116 R5300	1	
CM-CT 200/5	200 A	5 VA / 1	1SVR 450 116 R5400	1	
CM-CT 300/5	300 A	5 VA / 1	1SVR 450 117 R5100	1	
CM-CT 400/5	400 A	5 VA / 1	1SVR 450 117 R5200	1	
CM-CT 500/5	500 A	5 VA / 1	1SVR 450 117 R5300	1	
CM-CT 600/5	600 A	5 VA / 1	1SVR 450 117 R5400	1	

Accessories


Type	Description	Order code	Pack. unit pieces	Price 1 piece
CM-CT-A	Snap-on fastener for DIN rail mounting of CM-CT	1SVR 450 118 R1000	10	

Operating principle / circuit diagram

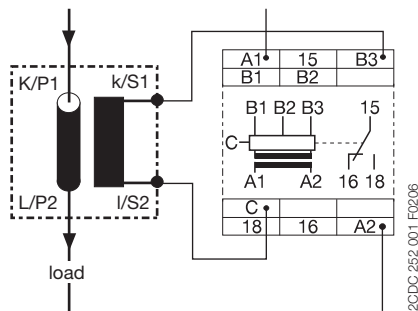

2CDC 252 001 F0206

Dimensional drawing

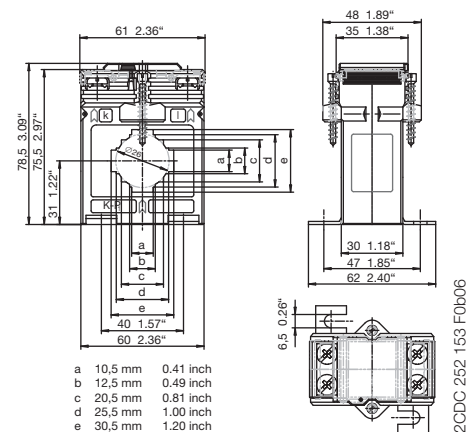

2CDC 252 153 F0006

