

CONTINUOUS CONTACT

WB REELS

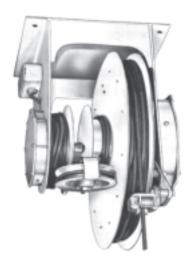

Gleason WB Reels are continuous contact reels ideal for use in applications where slip ring assemblies are not desired. No slip rings or other sliding contacts are used. Rather, a dual spool and pulley system safely and efficiently pays out and rewinds the cable.

The absence of electrical contact points on WB Reels make them an outstanding choice for applications involving portable or movable communication or instrumentation equipment. Such equipment could be adversely affected by the varying resistance of sliding electrical contacts or undue twisting of cords or cables resulting in varying imped-

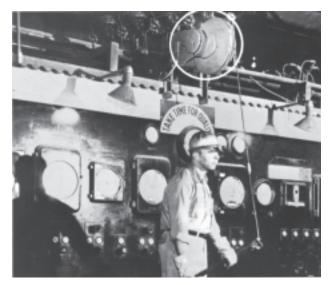

ance. WB Reels are also a smart choice for hazardous locations where electrical parts on the reel would require dust-tight or explosion-

A roller guide is included as standard equipment. A holding dog for window shade-type action can be furnished when required.

FIBER OPTIC CABLE of same approximate O.D. as SO shielded cable listed can be used with Series "WB" reels. Contact your factory representative for details.

WB Reels are selected using the standard process shown in the front of this catalog.

Reel models in selection charts based on travel speed of 150 fpm and 4 conductor shielded cable. Stretch reels based on 6% sag. Retrieve reels based on 3 ft lift to center line of reel.

Necessary reeling tensions suggest the use of high quality cable for good service life.

FOR CABLE SIZES NOT LISTED, CONSULT YOUR FACTORY REPRESENTATIVE. MAXIMUM CABLE O.D. = 0.625"

WB REEL **SELECTION CHARTS**

| WIRE SIZE | | FEET OF ACTIVE TRAVEL | | | | | | | | | | | | | | |
|--------------|----------|-----------------------|----------|-----------|-----------|-----------|---------------|---------------|---------------|---------------|--|--|--|--|--|--|
| (AWG) | 30 | 40 | 50 | 60 | 70 | 80 | 90 | 100 | 110 | 120 | | | | | | |
| 18 | WB-60-25 | WB-60-25 | WB-60-25 | WB-60-25 | WB-60-25 | WB-100-60 | WB-100-60 | WB-100-60 | WB-100-60 | WB-100-60 | | | | | | |
| 16 | WB-60-25 | WB-60-25 | WB-60-25 | WB-60-25 | WB-75-25 | WB-100-60 | WB-100-60 | WB-100-60 | WB-100-60 | WB-100-100-60 | | | | | | |
| 14 | WB-60-25 | WB-60-25 | WB-75-25 | WB-100-60 | WB-100-60 | WB-100-60 | WB-100-100-60 | WB-100-100-60 | WB-100-100-60 | WB-100-100-60 | | | | | | |


Stretch Reels (6% sag)


Lift Reels

| | | • (° /° ° °°) | , | | | | | | | | |
|------|----------|---------------|-----------|-----------|-----------|---------------|---------------|---------------|---------------|---------------|--|
| WIRE | | | | FEE | ET OF A | ACTIVE | TRAVEL | _ | | | |
| (AWC | | 30 40 50 | | 60 | 70 | 80 | 90 | 100 | 110 | 120 | |
| 18 | WB-60-25 | WB-60-25 | WB-60-25 | WB-75-25 | WB-75-25 | WB-100-60 | WB-100-60 | WB-100-60 | WB-100-60 | WB-100-60 | |
| 16 | WB-60-25 | WB-60-25 | WB-60-25 | WB-75-25 | WB-100-60 | WB-100-60 | WB-100-60 | WB-100-60 | WB-100-60 | WB-100-100-60 | |
| 14 | WB-60-25 | WB-75-25 | WB-100-60 | WB-100-60 | WB-100-60 | WB-100-100-60 | WB-100-100-60 | WB-100-100-60 | WB-100-100-60 | WB-100-100-60 | |


Retrieve Reels (3 ft mounting height)

| | , | | | | | | | | | | | | | | |
|--------------|----------|----------|----------|-----------|-----------|-----------|---------------|---------------|---------------|---------------|--|--|--|--|--|
| WIRE SIZE | | | | FEE | ET OF A | CTIVE | TRAVEL | _ | | | | | | | |
| (AWG) | 30 | 30 40 50 | | 60 | 70 | 80 | 90 | 100 | 110 | 120 | | | | | |
| 18 | WB-60-25 | WB-60-25 | WB-60-25 | WB-60-25 | WB-60-25 | WB-60-25 | WB-100-60 | WB-100-60 | WB-100-60 | WB-100-60 | | | | | |
| 16 | WB-60-25 | WB-60-25 | WB-60-25 | WB-60-25 | WB-75-25 | WB-100-60 | WB-100-60 | WB-100-60 | WB-100-60 | WB-100-100-60 | | | | | |
| 14 | WB-60-25 | WB-60-25 | WB-60-25 | WB-100-60 | WB-100-60 | WB-100-60 | WB-100-100-60 | WB-100-100-60 | WB-100-100-60 | WB-100-100-60 | | | | | |

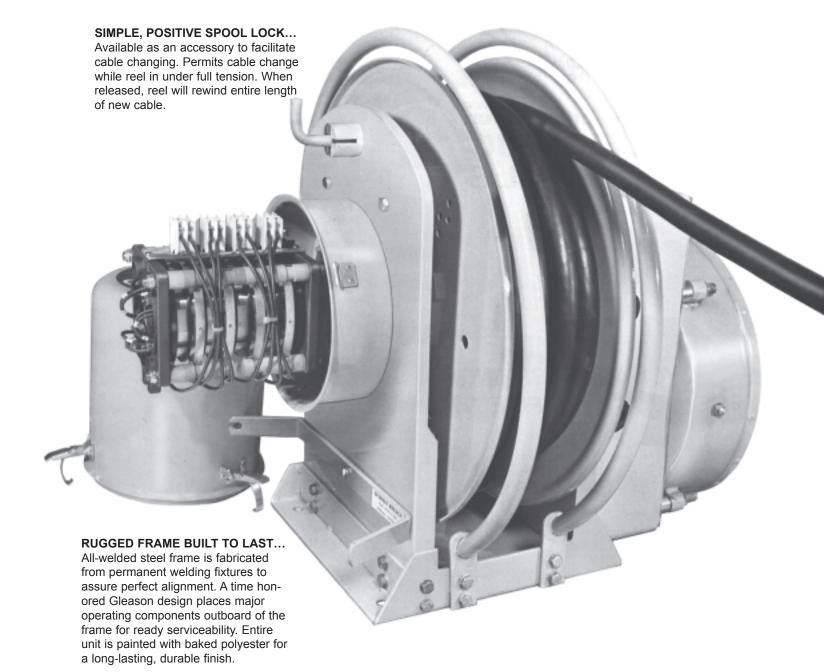

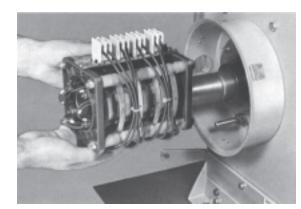

QUICK. ONE PIECE REMOVAL... The entire slip ring assembly can be replaced as a unit, if necessary. No need to handle small parts. To remove, simply disconnect wiring and loosen two set screws on the shaft-locking collar.

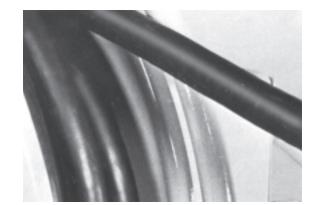

EVEN WINDING IN MULTIPLE LAYERS... Edges of steel flanges on cable spool are die-formed to eliminate cable pileup in corners. Segmenting of inner drum permits adjustability to suit various cable diameters – a slight change in cable size may be accommodated by the same reel with only minor field adjustment.


Dimensional Data

U Conduit Size

FIBER OPTICS

Any fiber optic cable of the same approximate O.D. as SO shielded cable listed can be used with Series "WB" reels. Contact your local factory representative for details.

| MODEL | Α | В | С | D | E | F | G | Н | J | K | L | М | N | 0 | Р | R | S | Т | U |
|----------|-------|------|-------|-------|-------|------|------|-------|-------|-------|------|-------|------|-------|-------|------|------|------|------|
| WB-60-25 | 12.00 | 9.00 | 20.00 | 21.69 | 17.69 | 2.00 | 5.88 | 10.50 | 11.69 | 16.69 | 0.75 | 13.88 | 0.75 | 15.37 | 14.00 | 6.00 | 3.25 | 4.75 | 0.50 |
| WB-75-25 | 12.00 | 9.00 | 27.00 | 28.69 | 20.75 | 2.00 | 6.81 | 10.75 | 15.19 | 19.69 | 0.75 | 13.88 | 0.75 | 15.37 | 22.00 | 6.00 | 6.69 | 4.63 | 0.50 |

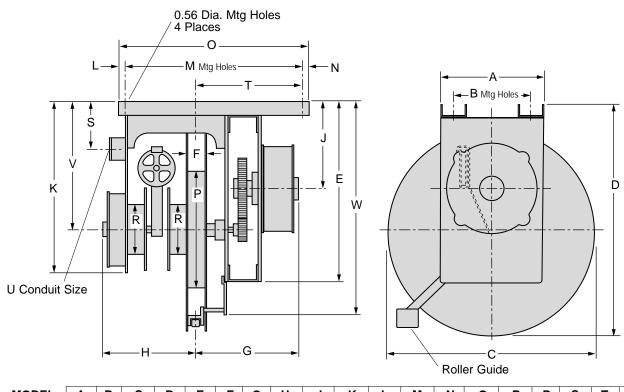

| MODEL | Α | В | С | D | E | F | G | Н | J | K | L | M | N | 0 | P | R | S | Т | U | V | W |
|---------------|-------|------|-------|-------|-------|------|-------|-------|-------|-------|------|-------|------|-------|-------|------|------|-------|------|-------|-------|
| WB-100-60 | 12.00 | 9.00 | 24.00 | 27.19 | 18.19 | 2.00 | 11.75 | 10.50 | 10.19 | 21.56 | 0.75 | 20.75 | 1.50 | 23.00 | 14.00 | 6.00 | 4.19 | 11.44 | 0.75 | 15.19 | 21.69 |
| WB-100-100-60 | 12.00 | 9.00 | 28.00 | 31.19 | 20.19 | 2.00 | 16.00 | 10.75 | 12.19 | 23.56 | 0.75 | 20.75 | 1.50 | 23.00 | 16.00 | 6.00 | 6.00 | 11.44 | 0.75 | 17.19 | 23.69 |