


# PROGRAM PORT D-SUB – WITH TERMINALS AND DUPLEX RECEPTACLE

The Daykin Program Port Module allows access to the programmable controller without having to open doors or de-energize the main disconnect.

## Features

- ï Compact and reliable - offers mounting flexibility
- ï Available with 9, 15 or 25 D-SUB female connector with screw clamp terminals
- ï 15 Amp duplex receptacle provides power to peripheral equipment
- ï Mounting gasket can be used as a cutout template
- ï Lockable covers prevent unauthorized access to interior devices

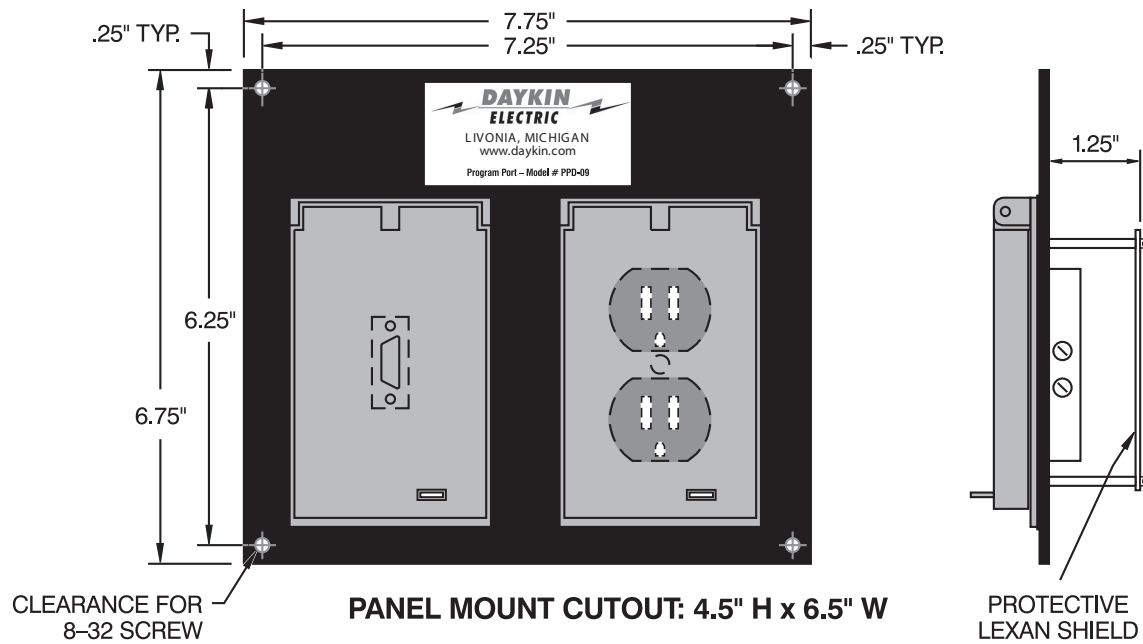

Female D-Sub Insulated Terminals	Model	Approx. Weight (LBS)	
9 Pin	PPD-09	2	
15 Pin	PPD-15	2	
25 Pin	PPD-25	2	

### 15 Ft. Shielded Multi-Conductor Cable with Male D-Sub for Above Units

Male D-Sub Connector	Model	
9 Pin	MC-09	
15 Pin	MC-15	
25 Pin	MC-25	

- ï Male end wired to cable with all pins passed through point to point.
- ï Male D-Sub locking hardware provided standard – screw or slide type.

PROGRAM PORT

# PROGRAM PORT D-SUB – WITH CABLE AND DUPLEX RECEPTACLE

The Daykin Program Port Module allows access to the programmable controller without having to open doors or de-energize the main disconnect.

## Features


Compact and reliable - offers mounting flexibility

Available with 9, 15 or 25 D-SUB female connector with attached 10 foot cable and pre-soldered male connector

15 Amp duplex receptacle provides power to peripheral equipment

Mounting gasket can be used as a cutout template

Lockable covers prevent unauthorized access to interior devices

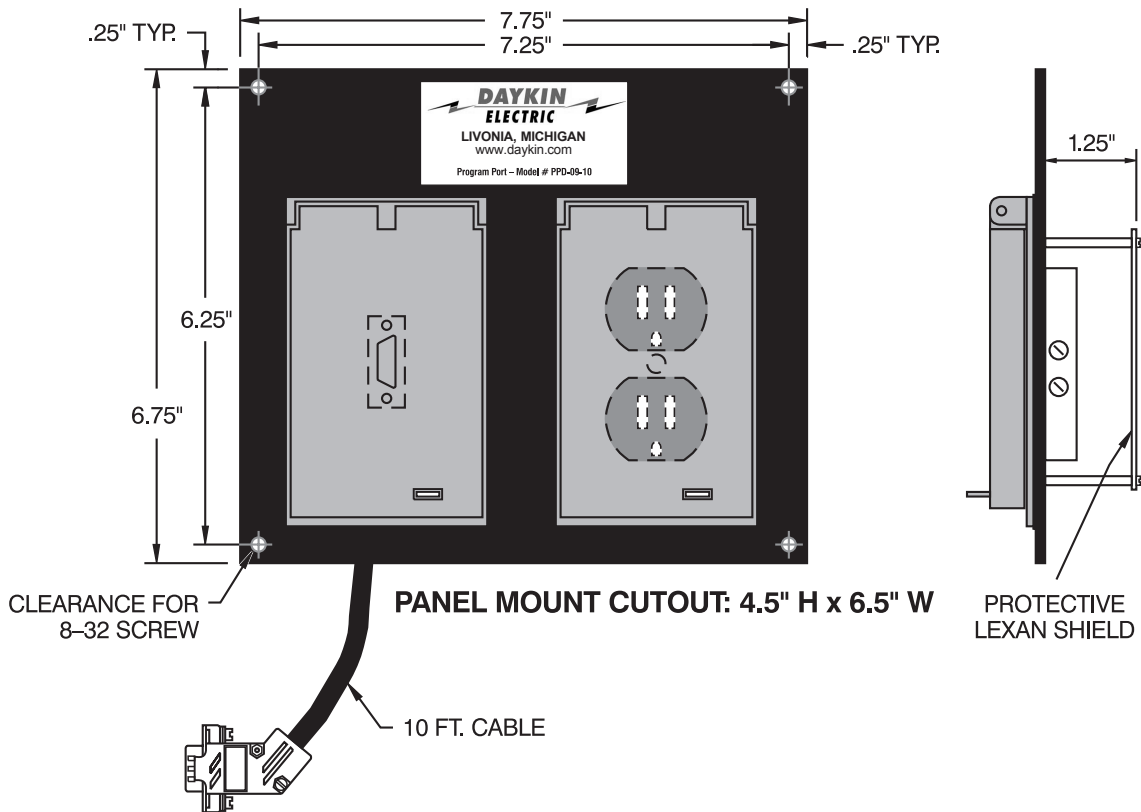

PROGRAM PORT

Female D-Sub	Model	Approx. Weight (LBS)	
9 Pin	PPD-09-10	2	
15 Pin	PPD-15-10	2	
25 Pin	PPD-25-10	3	

# PROGRAM PORT D-SUB – WITH CABLE AND DUPLEX RECEPTACLE

The Daykin Program Port Module allows access to the programmable controller without having to open doors or de-energize the main disconnect.

## Features


Compact and reliable - offers mounting flexibility

Available with 9, 15 or 25 D-SUB female connector with attached 10 foot cable and pre-soldered male connector

15 Amp duplex receptacle provides power to peripheral equipment

Mounting gasket can be used as a cutout template

Lockable covers prevent unauthorized access to interior devices

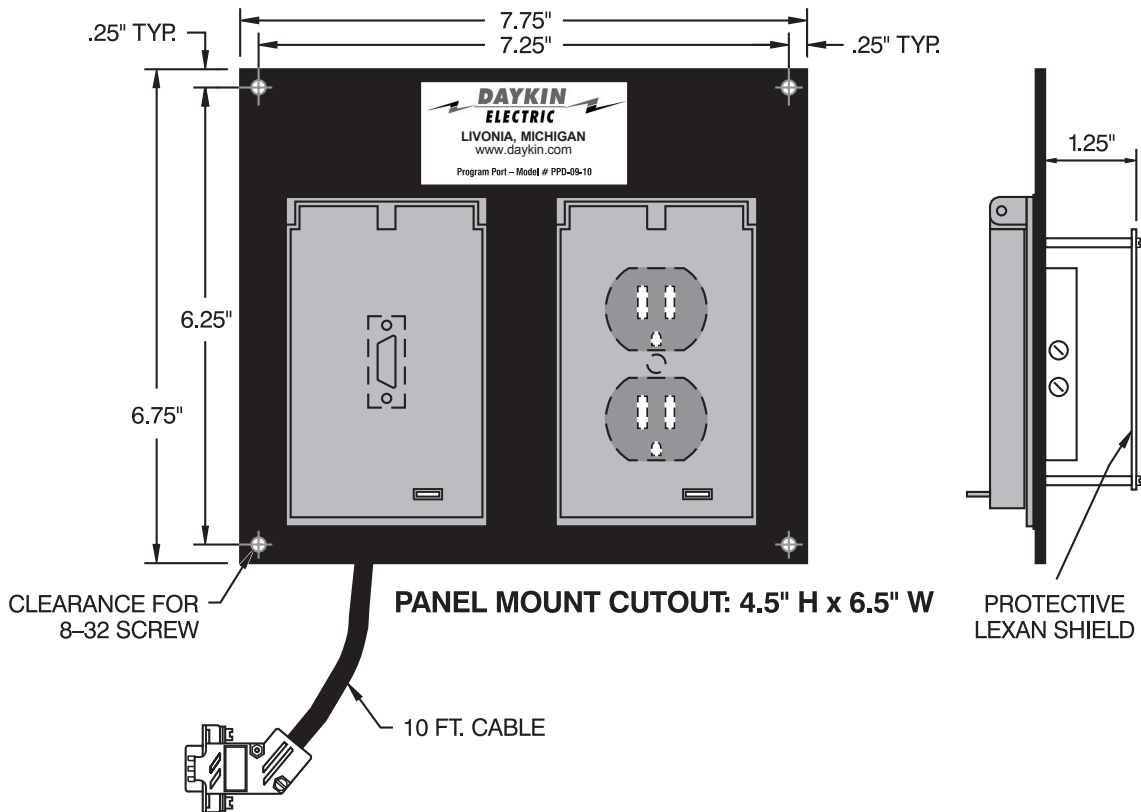

Female D-Sub	Model	Approx. Weight (LBS)	
9 Pin	PPD-09-10	2	
15 Pin	PPD-15-10	2	
25 Pin	PPD-25-10	3	

# PROGRAM PORT SLC-500 – WITH CABLE AND DUPLEX RECEPTACLE

The Daykin Program Port Module allows access to the SLC-500 family of processors without having to open doors or de-energize the main disconnect.

## Features


Compact and reliable - offers mounting flexibility

Available with 3 or 10 foot cable and RJ45M connector

15 Amp duplex receptacle provides power to peripheral equipment

Mounting gasket can be used as a cutout template

Lockable covers prevent unauthorized access to interior devices

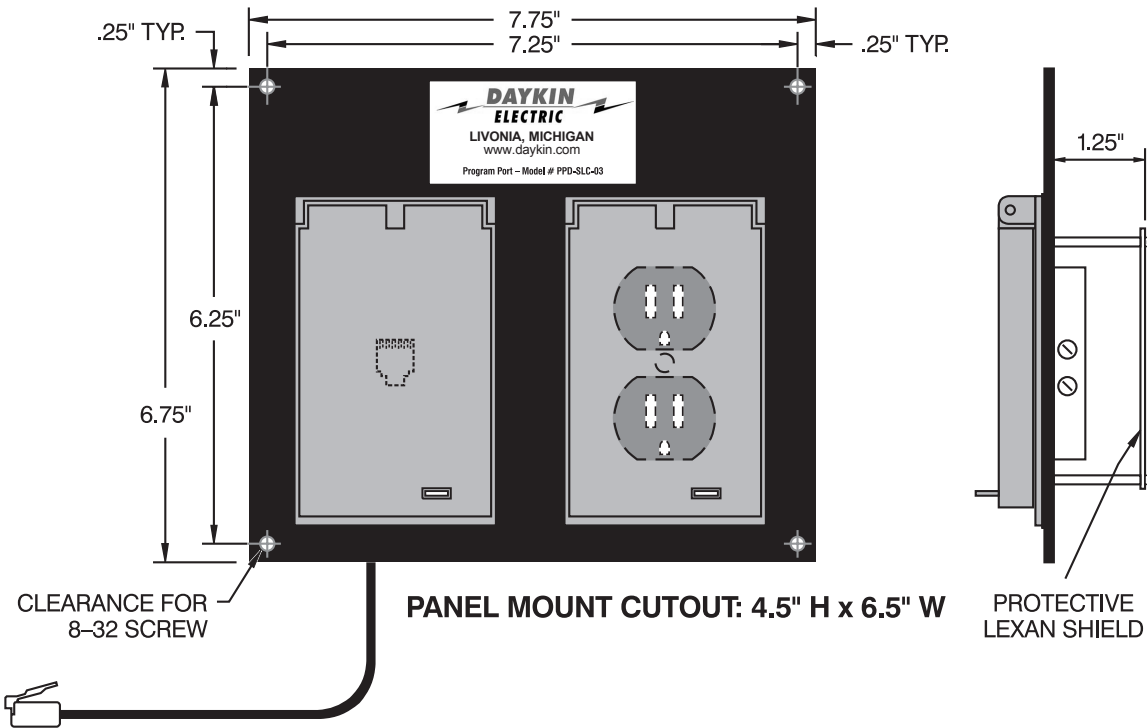


Cable Length	Model	Approx. Weight (LBS)	
3 Ft.	PPD-SLC-03	2	
10 Ft.	PPD-SLC-10	2	

## TOKEN RING – WITH DUPLEX RECEPTACLE

The Daykin Program Port Module allows access to the programmable controller network without having to open doors or de-energize the main disconnect.

### Features

- Compact and reliable - offers mounting flexibility
- 15 Amp duplex receptacle provides power to peripheral equipment
- Mounting gasket can be used as a cutout template
- Lockable covers prevent unauthorized access to interior devices

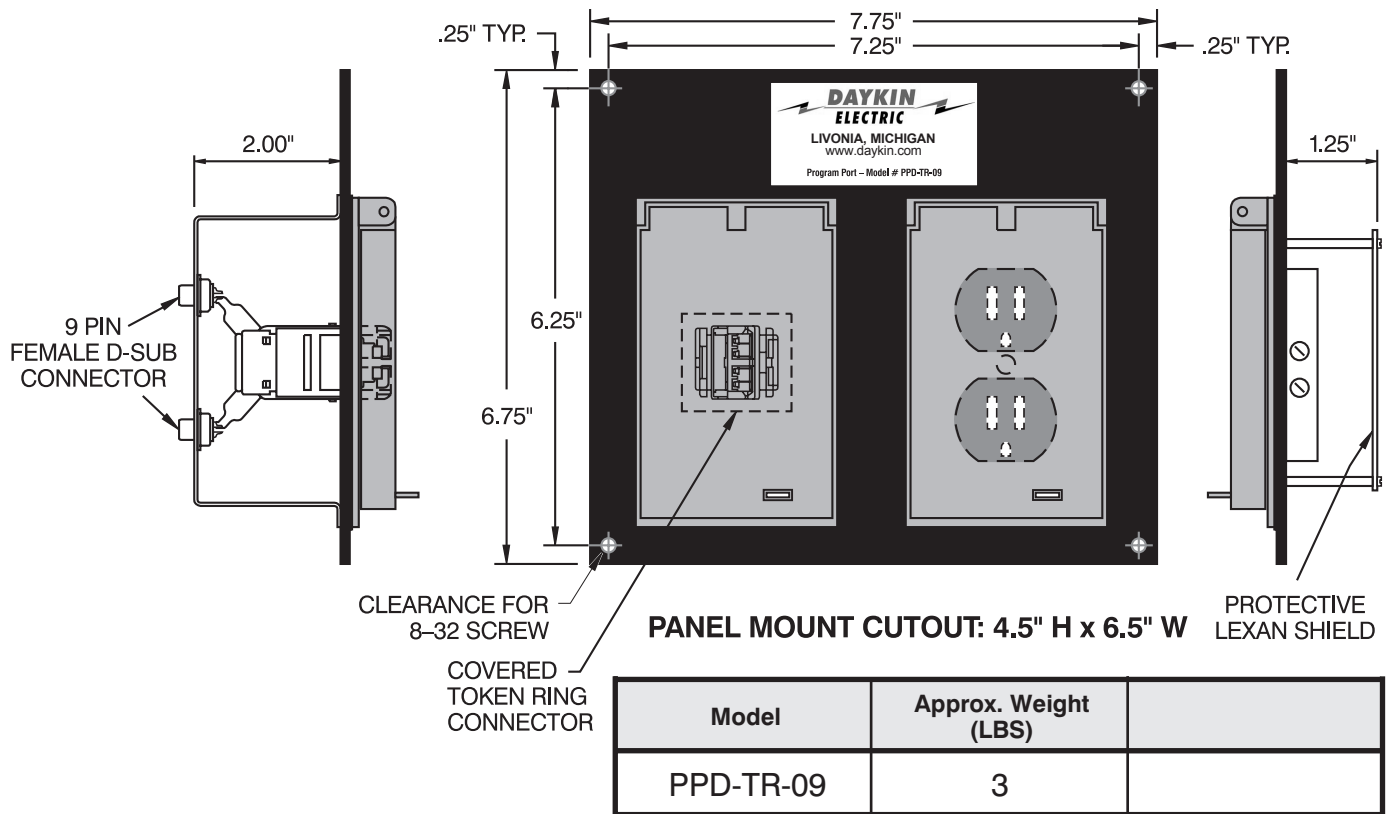

### 10 Ft. Shielded Multi-Conductor Cable with Male End D-Sub and Token Ring Connector

Model	Approx. Weight (LBS)	
TRC-10	1	



### Options

<b>Circuit Breaker</b> 3 amp – 120 volt to protect 120 volt receptacle	<b>Add Suffix</b>	<b>CB</b> Suffix to Model No.
Substitution of standard duplex receptacle with <b>Ground Fault Circuit Interrupter</b>	<b>G</b>	Replaces “D” in Model No.
Substitution of standard duplex receptacle with <b>Isolated Ground Receptacle</b>	<b>IG</b>	Suffix to Model No.
Single, dual and triple position plates assembled to include connectors suitable for a specific application	—	Consult Factory
Cable lengths other than those shown with catalog numbers are available upon request. Specify length with respective connecting plug.	—	Consult Factory

### Quick Reference

Unit	Used With
RJ45M, 8 Wire	Allen Bradley SLC-500 Family
9 Pin D-Sub	Allen Bradley PLC-5 Family Square D SY/MAX 200-600 Modicon 984 Slot Mount and Compact 984
15 Pin D-Sub	Allen Bradley PLC-2 Family
25 Pin D-Sub	Allen Bradley PLC-3 Family Modicon 984A, 984B and 984X
Token Ring	Modicon Mod Bus Plus Network