

Strobe-Alert

TM

Strobe-Alert LC10 0501 D3_0

Compact Flash Alarm

Specifications

Supply voltage:	LC09: 12-36 VDC LC10: 120 VAC @ 50-60 Hz. LC10-E: 240 VAC @ 50-60 Hz.
Consumption:	3 watts max.
Strobe color:	Amber
Strobe type:	Xenon tube
Strobe flash:	1 per second
Strobe life:	10M cycles
Electronics temp.:	F: -40° to 158° C: -40° to 70°
Enclosure rating:	NEMA 4X (IP65)
Encl. material:	Polycarbonate
Encl. compatibility:	Round Flowline enclosures
Wire type:	2-wire, #22 AWG
Wire length:	5" (12.7 cm)
Wire jacket mat.:	Polymeric
Classification:	General purpose
Certificate:	CSA: LR 79326




Description

Offered in both AC and DC powered configurations, the accessory flash alarm brings immediate local attention to process conditions. The alarm is compatible with our round enclosures and may be actuated with any of our level switch, flow switch or relay control products. Specify the supply voltage. The alarm is commonly applied in tank spill prevention, environmental safety, pump or process protection applications. Install the alarm in a visible location. We recommend the use of a second audible alarm in more critical applications.


Features

- ✓ High intensity amber flash alarm alerts on-site personnel
- ✓ NEMA 4X polycarbonate housing for use in corrosive environments
- ✓ Mounts directly on any Flowline round enclosure product


Strobe Alone

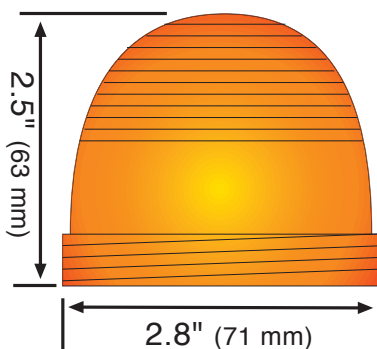

Strobe w/ LC10

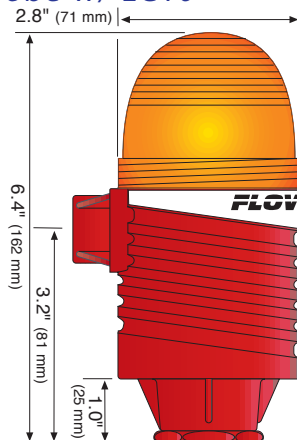

Strobe w/ LC06

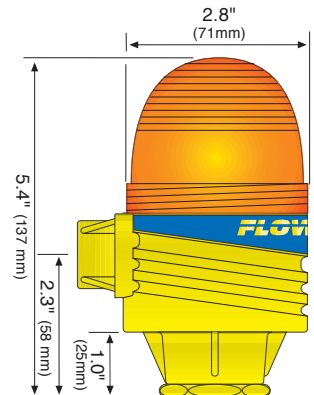

Strobe-Alert

Ordering

LC -1004

Supply voltage (1) (2)
09 12-36 VDC
10 120 VAC

Ordering Notes

- 1) To factory configure the LC10-1004 for 240 VAC, place an E at the end of the P/N (ie: LC10-1004-E).
- 2) For field mount and conduit termination, order a LC06-10_1 junction box.



Spec Tech Industrial 203 Vest Ave. Valley Park, MO 63088 Phone: 888 SPECTECH
E-mail: sales@spectechind.com www.spectechind.com