



Think Automation and beyond...



IDEC LW Silhouette Switches

Spec Tech Industrial 203 Vest Ave. Valley Park, MO 63088 Phone: 888 SPECTECH
Email: sales@spectechind.com www.spectechind.com

Distinctive Styling

A Work of Modern Art

IDEC Corporation, one of the top 5 switch manufacturers in the world, dominates the market with a well-deserved reputation for producing high-quality, reliable products. With over sixty years of experience, the introduction of the LW Silhouette series of switches means customers can now get a striking exterior to match.

Bold designs

The refined style of the IDEC LW Silhouette switches brings a fresh look to any application. Designed with a sleek and updated appearance, these flush mount switches are appealing on many different levels.

Unparalleled performance

When you want reliability, IDEC is the answer. Backed by global approvals, IDEC switches test well beyond the number of operation cycles required by industrial standards. Buying an IDEC switch means buying a high-end product you can count on to last.

Progressive technology

Beneath the clean style of LW Silhouette switches lies durable construction and cutting-edge technology. Our exclusive, ergonomic design requires minimal force allowing it to seamlessly integrate into any panel.



www.IDEC.com/usa



Note: Switches shown with optional safety lever lock

Personalize your Experience



www.IDEC.com/usa



Pushbuttons

- Bezel: Metal, Plastic and Plastic with guard
- Solder, PCB and Screw terminals available
- Maintained and Momentary operator type



Illuminated Pushbuttons

- Bezel: Metal, Plastic and Plastic with guard
- LED Illumination (6, 12, 24V AC/DC, 120 and 240V AC)
- Gold and Silver contacts



Pilot Lights

- Flush or Extended Lens available
- LED Illumination (6, 12, 24V AC/DC, 120 and 240V AC)
- Solder, PCB and Screw terminals available



Selector Switches

- 2 and 3 position selector switches
- Knob or Lever Handle
- Maintained and Spring Return operator type



Illuminated Selector Switches

- 2 and 3 position selector switches
- LED Illumination (6, 12, 24V AC/DC, 120 and 240V AC)
- Bezel: Metal or Plastic



Key Selector Switches

- 2 and 3 position selector switches
- 60 different key variations available
- Maintained and Spring Return operator type



Illuminated Key Selector Switches

- 2 and 3 position selector switches
- LED Illumination 24V AC/DC
- Two way split illumination on light ring

Note: Round switches are available in Metal or Plastic bezel, while square switches are only available with a plastic bezel.



- Food Processing
- Semiconductor Industry
- Medical Equipment
- Chemical Process Plants
- Elevators
- Biomedical Facilities
- Robotic Cell Work Stations
- Yachts
- Transportation
- Audio/Visual



Streamline Applications

With aggressive lines and impressive performance, LW Silhouette switches make a personal statement about your style. Projecting only 2mm when mounted on a panel, these sleek switches provide a sharp, updated look while maintaining the highest levels of quality and durability. Choose from one of six eye-catching colors.


Perfect for industries requiring a hygienic surface, LW Silhouette switches save space and money with an operator that mounts

flush; eliminating the need for accessories or additional parts, and limiting the chance of any accidental resetting. In addition, the smoother design cuts down on surface area and consequently prevents dust and other particles from accumulating in your control units, covers and panels. Not to mention, making regular cleaning and maintenance easier.

So what's your favorite color?

800-262-IDEC

Colors to match your need and style



2mm

Projects only 2mm from the front of panel

LW Silhouette Series

Shape	Size (mm)	Bezel Type	Panel Cut-out	Style	Pushbutton	Pilot Light	Illuminated Pushbutton	Selector	Key Selector	Illuminated Selector	Illuminated Key Selector
	ø28	Metal	ø25.3	Flush	•	•	•	•	•	•	•
				Extended	•	•	•	•	•	•	•
	ø28	Plastic	ø25.3	Flush	•	•	•	•	•	•	•
				Extended	•	•	•	•	•	•	•
	□28	Plastic	□24.5	Flush	•	•	•	•	•	•	•
				Extended	•	•	•	•	•	•	•



Pilot Lights (LED: 24V AC/DC)

Shape	Bezel	Illumination Color	Solder/Tab Terminals	Screw Terminals
Round	Metal	Green	LW6MP-14G	LW6MP-14MG
Round	Plastic	Blue	LW6P-14S	LW6P-14MS
Square	Plastic	Red	LW7P-14R	LW7P-14MR

Pushbuttons

Operator Type	Shape	Bezel	Button Color	Solder/Tab Terminals	Screw Terminals
Momentary	Round	Metal	Black	LW6MB-M1C6LB	LW6MB-M1C6MLB
Maintained	Round	Plastic	Red	LW6B-A1C6LR	LW6B-A1C6MLR
Momentary	Square	Plastic with guard	Green	LW7GB-M1C6LG	LW7GB-M1C6MLG

Illuminated Pushbuttons (LED: 24V AC/DC)

Operator Type	Shape	Bezel	Illumination Color	Solder/Tab Terminals	Screw Terminals
Momentary	Round	Metal	Yellow	LW6ML-M1C64Y	LW6ML-M1C64MY
Maintained	Round	Plastic	Green	LW6L-A1C64G	LW6L-A1C64MG
Momentary	Square	Plastic with guard	Red	LW7L-M1C64R	LW7L-M1C64MR

Selector Switches

Operator Type	Shape	Bezel	Position	Solder/Tab Terminals	Screw Terminals
Maintained	Round	Metal	2	LW6MS-2C6	LW6MS-2C6M
Maintained	Round	Metal	3	LW6MS-3C6	LW6MS-3C6M
Spring Return from Right	Square	Plastic	3	LW7S-31C6	LW7S-31C6M

Illuminated Selector Switches (LED: 24V AC/DC)

Operator Type	Shape	Bezel	Illumination Color	Position	Solder/Tab Terminals	Screw Terminals
Maintained	Round	Metal	Red	2	LW6MF-2C64R	LW6MF-2C64MR
Spring Return from Right	Round	Plastic	Green	2	LW6F-21C64G	LW6F-21C64MG
Maintained	Square	Plastic	Blue	3	LW7F-3C64S	LW7F-3C64MS

Key Selector Switches

Operator Type	Shape	Bezel	Position	Solder/Tab Terminals	Screw Terminals
Maintained	Round	Metal	2	LW6MK-2C6A	LW6MK-2C6MA
Maintained	Round	Metal	3	LW6MK-3C6A	LW6MK-3C6MA
Spring Return from Right	Round	Plastic	3	LW6K-31C6B	LW6K-31C6MB


Illuminated Key Switches (LED: 24V AC/DC)

Operator Type	Shape	Bezel	Position	Illumination Color		Solder/Tab Terminals	Screw Terminals
				Left Half	Right Half		
Maintained	Round	Metal	2	Green	Green	LW6MJ-2C64GGA	LW6MJ-2C64MGGA
Maintained	Round	Metal	3	Red	Green	LW6MJ-3C64RGA	LW6MJ-3C64MRGA
Spring Return from Right	Round	Plastic	2	Blue	Blue	LW6J-21C64SSB	LW6J-21C64MSSB

Notes:

- Switches listed above have DPDT contacts - SPDT and 3PDT contacts also available
- Switches also available with PCB terminals
- Illuminated Switches and pilot lights are available in 6, 12, 24V AC/DC, 120 and 240V AC
- Available colors: Red, Green, Amber, Yellow, Blue, White

Mounting Hole Layout

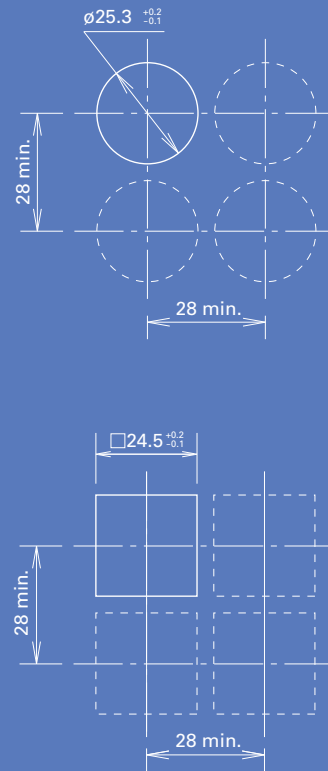

Note: Dimensions in mm

Specifications

General Specifications		Value
Operating Temperature		-25 to +60°C (no freezing), Illuminated units: -25 to +50°C
Storage Temperature		-40 to +80°C
Operating Humidity		45 to 85% RH (no condensation)
Contact Resistance		50 mΩ maximum (initial value)
Insulation Resistance		100 MΩ minimum (500V DC megger)
Dielectric Strength	Switch Unit	Between live part and ground: 2,500V AC, 1 minute Between terminals of different poles: 2,500V AC, 1 minute Between terminals of the same poles: 1,000V AC, 1 minute
	Illumination Unit	Between live part and ground: 2,500V AC, 1 minute
Vibration Resistance		Operating extremes: 5 to 55 Hz, amplitude 0.5 mm
Shock Resistance		Damage limits: 1,000 m/s ² (100G) Operating extremes: 100 m/s ² (10G)
Mechanical Life (minimum operations)		Pushbuttons (Momentary): 1,000,000 Pushbuttons (Maintained): 500,000 Selector switches: 250,000 Key selector switches (Illuminated and Non-Illuminated): 100,000 Illuminated selector switches: 250,000
Electrical Life (minimum operations)		Pushbuttons (Momentary): 100,000 ¹ Pushbuttons (Maintained): 100,000 ² Selector switches: 100,000 ² Key selector switches (Illuminated and Non-Illuminated): 100,000 ² Illuminated selector switches: 100,000 ²
Degree of Protection		IP65 (IEC 60529)
Terminal Style		Solder/tab terminal #110 PCB terminal Screw terminal

- Switching frequency 1,800 operations/hour.
- Switching frequency 900 operations/hour.

Contact Ratings	Contact Type	Value			
		Maximum Voltage	250V AC/DC		
Gold Contacts	Thermal Current	3A			
	Operating Voltage	125V AC	30V DC		
	Operating Current (resistive load)	0.1A	0.1A		
	Contact Material	Gold-clad silver			
Silver Contacts	Operating Voltage	30V	125V	250V	
	Operating Current	AC 50/60Hz	Resistive Load	3A	2A
			Inductive Load	2A	1.5A
	DC	Resistive Load	2A	0.4A	-
		Inductive Load	1A	0.2A	-
Thermal Current	5A				
Contact Material	Silver				

- AC inductive load: PF = 0.6 to 0.7
- DC inductive load: L/R = 7ms max.
- Minimum applicable load (reference value): 5V AC/DC, 1mA

800-262-IDEC

For more choices, go to www.IDEC.com/switches



The Final Touch

LW Silhouette switches are a luxury you can't afford to miss. Sleek lines and vivid colors enhance the look of your application while also increasing its marketability. This essential component will add a touch-of-class to any application. Take a closer look inside this brochure and see which LW switch is for you!

Only 2mm projects from the panel.

Bezel Projects Only 2mm From Front of Panel

- Bezel**
- Metal
 - Plastic
 - Plastic with Guard

Safety Lever (Optional Safety Lever Lock)



Removable Contact Block

- Snap Action Contacts**
- SPDT
 - DPDT
 - 3PDT

Terminals

- Solder Tab/Quick Connect
- Screw
- PCB

Contact Material

- Gold
- Silver



800-262-IDEC

IDEC

www.IDEC.com/usa

www.IDEC.com/usa

USA

IDEC Corporation
Tel: (408) 747-0550
opencontact@idec.com

Canada

IDEC Canada Ltd.
Tel: (905) 890-8561
sales@ca.idec.com

Australia

IDEC Australia Pty. Ltd.
Tel: +61-3-9763-3244
sales@au.idec.com

Japan

IDEC Corporation
Tel: +81-6-6398-2571
products@idec.co.jp

United Kingdom

IDEC Electronics Ltd.
Tel: +44-1256-321000
sales@uk.idec.com

Germany

IDEC Elektrotechnik GmbH
Tel: +49-40-253054-0
service@idec.de

Hong Kong

IDEC (H.K.) Co., Ltd.
Tel: +852-2803-8989
info@hk.idec.com

China/Beijing

IDEC (Beijing) Corporation
Tel: +86-10-6581-6131
idec@cn.idec.com

China/Shanghai

IDEC (Shanghai) Corporation
Tel: +86-21-5353-1000
idec@cn.idec.com

China/Shenzhen

IDEC (Shenzhen) Corporation
Tel: +86-755-8356-2977

Singapore

IDEC Asia Pte. Ltd.
Tel: +65-6746-1155
info@sg.idec.com

Taiwan

IDEC Taiwan Corporation
Tel: +886-2-2698-3929
service@tw.idec.com

©2008 IDEC Corporation. All Rights Reserved.
Catalog No. LW9Y-B100-0 6/08 15K

Specifications and other descriptions in this catalog are subject to change without notice.