



Workplace Solutions

REELS

Heavy Duty ELECTRIC CABLE REELS

SERIES "G" FEATURES GENERAL PURPOSE MODELS

- Fully Automatic; Machine Mountable
- All-Welded Solid Steel Construction
- Slip Rings in NEMA 4 Enclosure
- Generously Sized Junction Box
- Heavy Duty Mounting Base
- Safetychange® Spring Motor
- Weatherproof Gasket on Spring Motor
- Positive Ratchet Lock with Disengage
- Multi-position Cable Guide (Field Adjustable)
- Orange Polyester Baked-On Finish
- Cable Included
- Field Adjustable Cable Stop Included
- Optional 340° Pivot Base

Series "G" Model Chart



CABLE INCLUDED

Models listed below are
UL and CSA listed.




CABLE DATA				REEL CATALOG NUMBER	FLANGE DIA. in. (mm)	WEIGHT COMPLETE lbs. (kg)	340° BASE (OPTIONAL)	CABLE STOP (INCLUDED)							
TYPE SO CORD															
RATING @600V	AWG	NO. COND.	LENGTH* ft. (m)												
10 Amp	16	3	20 (6.0)	G-232	14 (356)	39 (17.6)	PB14	CP-1							
			30 (9.0)	G-224		42 (18.9)									
			40 (12.0)	G-231		48 (21.6)									
			45 (13.5)	G-228		49 (22.0)									
			60 (18.0)	G-429		82 (36.9)									
8 Amp		4	20 (6.0)	G-233	14 (356)	40 (18.0)	PB14								
			30 (9.0)	G-234		44 (19.8)									
			40 (12.0)	G-244		48 (21.6)									
			50 (15.0)	G-238		49 (22.0)									
			60 (18.0)	G-439		82 (36.9)									
7 Amp		6	45 (13.5)	G-206	14 (356)	54 (24.3)	PB14	CP-2							
			50 (15.0)	G-26B		56 (25.2)									
			40 (12.0)	G-28B		56 (25.2)									
			45 (13.5)	G-38B		56 (25.2)									
			10	35 (10.5)		G-30B			54 (24.3)						
		12	35 (10.0)	G-32B		55 (24.8)									
	3		20 (6.0)	G-331	14 (356)	40 (18.0)	PB14								
			30 (9.0)	G-253		46 (20.7)									
			40 (12.0)	G-334		50 (22.5)									
			50 (15.0)	G-358		54 (24.3)									
70 (21.0)		G-459	16 (406)	84 (37.8)		PB16									
12 Amp	4	20 (6.0)	G-342	14 (356)	40 (18.0)	PB14	CP-2								
		25 (7.5)	G-343		44 (19.8)										
		30 (9.0)	G-363		48 (21.6)										
		40 (12.0)	G-344		52 (23.4)										
		50 (15.0)	G-367		56 (25.2)										
	6	65 (17.5)	G-469	16 (406)	86 (38.7)	PB16									
		35 (10.5)	G-36C	14 (356)	52 (23.4)	PB14									
		50 (15.0)	G-46C	16 (406)	92 (41.4)	PB16									
		10 Amp	8	25 (7.5)	G-38C	14 (356)		52 (23.4)	PB14	CP-3					
				30 (9.0)	G-48C			49 (22.1)							
20 (6.0)	G-40C			53 (23.9)											
20 Amp	3			20 (6.0)	G-332		14 (356)	40 (18.0)			PB14	CP-2			
				25 (7.5)	G-383			44 (19.8)							
		30 (9.0)	G-333	46 (20.7)											
		35 (10.5)	G-385	47 (21.2)											
		45 (13.5)	G-435	55 (24.8)											
	60 (18.0)	G-436	16 (406)	69 (31.1)	PB16										
		20 (6.0)	G-346	40 (18.0)		PB14									
		30 (9.0)	G-394	48 (21.6)											
		40 (12.0)	G-444	52 (23.4)											
		50 (15.0)	G-445	86 (38.7)											
16 Amp	4	60 (18.0)	G-446	16 (406)	89 (40.1)		PB16								
		14 Amp	6	25 (7.5)	G-463	14 (356)		51 (23.0)	PB14	CP-3					
				20 (6.0)	G-482			52 (23.4)							
				25 Amp	3			20 (6.0)			G-241	14 (356)	44 (19.8)	PB14	CP-2
								25 (7.5)			G-242		46 (20.7)		
30 (9.0)	G-433						48 (21.6)								
40 (12.0)	G-434	50 (22.5)													
50 (15.0)	G-535	86 (28.7)													
	60 (18.0)	G-536	16 (406)	89 (40.1)	PB16										
		20 Amp	4	20 (6.0)		G-452	14 (356)	49 (22.1)	PB14						
				30 (9.0)		G-443		52 (23.4)							
				40 (12.0)		G-447		88 (39.6)							
				50 (15.0)		G-545		92 (41.4)							
	6			20 (6.0)	G-462	14 (356)		52 (23.4)		PB14					
		30 (9.0)	G-564	16 (406)	80 (36.0)	PB16									


* Length of cable listed is for ACTIVE travel.

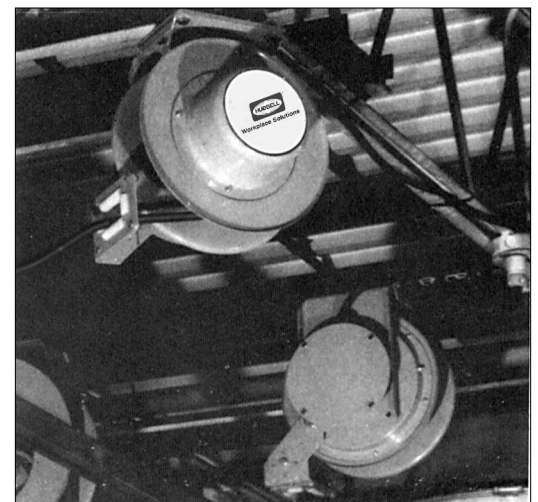


14 INCH REELS

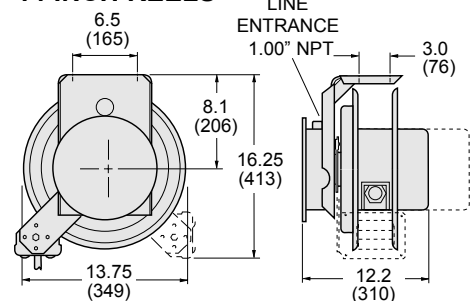

Length shown 3 or 4 conductor reel.
For 5 - 8 conductor, add 1.50" (38mm).
For 9 - 12 conductor, add 3.00" (76mm).

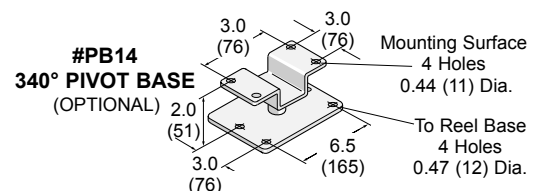

16 INCH REELS

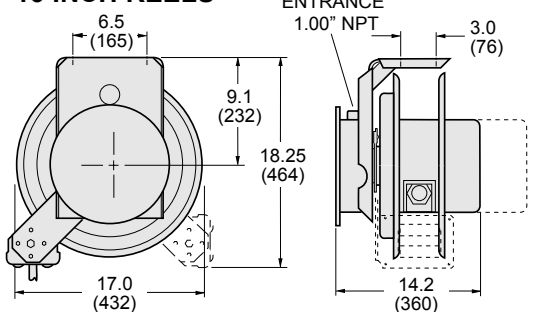

Length shown 3 or 4 conductor reel.
For 5 - 8 conductor, add 1.50" (38mm).
For 9 - 12 conductor, add 3.00" (76mm).

