




Miniature controls

- Contactors
- Overload relays
- Starters
- Control relays

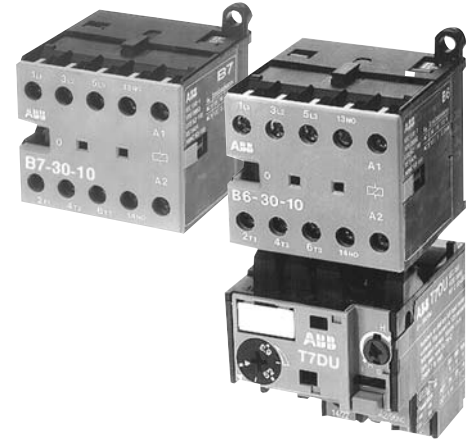

Description

General features

- Wiring terminations available include plug-on connectors, wire pins for PC board mounting and solder connections
- Low power consumption coils
- Touch safe design: All screw connection terminals are protected against accidental touch
- Slotted Pozidriv terminal screws
- Screwdriver guide holes
- Self-lifting cable clamps
- Panel or DIN rail mounting
- Terminals supplied in the open position
- Electrically noiseless operation
- Snap-on accessories
- UL Listed, file # E39231
- CSA approved, file #LR15332
- IEC, VDE & most international standards

Contactors

- B6 and BC6 miniature contactors can be used for small motors up to 1 HP, 460V
- B7 and BC7 miniature contactors can be used for small motors up to 5 HP, 460V
- Applications include use in machines, electrical appliances, building automation systems, heating systems, overhead door applications, etc.
- B6 and B7 miniature contactors are designed to be directly connected to a PLC transistor output

Interface contactors

- "Interface" mini-contactors are normally used to establish an isolation between the electronic part and the process in large automation systems

Mechanically interlocked contactors

- Compact, mechanically interlocked contactors are available
- Can be used for reversing applications

Control relays

- AC & DC operated

Overload relays

- 14 setting ranges from 0.11 to 10.5 amps
- Manual or automatic reset
- Phase failure compensation
- Ambient temperature compensation
- Stop and test button functions
- UL Listed, file #E149922
- CSA approved, file # LR98336

B6 & B7 contactors 3 Phase

4



B6C-1



B7C-1



B6CFP-1



B7CSP-1

Non-reversing with screw connections

General purpose AC1	Maximum motor FLA AC3	3 Phase motor horsepower				Single phase		Number of power poles	Auxiliary contacts	Catalog number	List price
		208V	230V	460V	600V	120V	230V				
AC operated											
12	6.8	1	2	3	1	1/2	1	3 3 4	1 N.O. 1 N.C. —	B6C-★ B6C-★01 B6C4P-★	\$ 51
16	9.6	2	3	5	5	1	2	3 3 4	1 N.O. 1 N.C. —	B7C-★ B7C-★01 B7C4P-★	72
DC operated											
12	6.8	1	2	3	1	1/2	1	3 3	1 N.O. 1 N.C.	BC6C-★ BC6C-★01	57
16	9.6	2	3	5	5	1	2	3 3	1 N.O. 1 N.C.	BC7C-★ BC7C-★01	78

Non-reversing with flat pin connections

General purpose AC1	Maximum motor FLA AC3	3 Phase motor horsepower				Single phase		Number of power poles	Auxiliary contacts	Catalog number	List price
		208V	230V	460V	600V	120V	230V				
AC operated											
12	6.8	1	2	3	1	1/2	1	3 3 4	1 N.O. 1 N.C. —	B6CFP-★ B6CFP-★01 B6C4PFP-★	\$ 51
16	9.6	2	3	5	5	1	2	3 3 4	1 N.O. 1 N.C. —	B7CFP-★ B7CFP-★01 B7C4PFP-★	72
DC operated											
12	6.8	1	2	3	1	1/2	1	3 3	1 N.O. 1 N.C.	BC6CFP-★ BC6CFP-★01	57
16	9.6	2	3	5	5	1	2	3 3	1 N.O. 1 N.C.	BC7CFP-★ BC7CFP-★01	78

Non-reversing with soldering pin connections

General purpose AC1	Maximum motor FLA AC3	3 Phase motor horsepower				Single phase		Number of power poles	Auxiliary contacts	Catalog number	List price
		208V	230V	460V	600V	120V	230V				
AC operated											
12	6.8	1	2	3	1	1/2	1	3 3 4	1 N.O. 1 N.C. —	B6CSP-★ B6CSP-★01 B6C4PSP-★	\$ 51
16	9.6	2	3	5	5	1	2	3 3 4	1 N.O. 1 N.C. —	B7CSP-★ B7CSP-★01 B7C4PSP-★	72
DC operated											
12	6.8	1	2	3	1	1/2	1	3 3	1 N.O. 1 N.C.	BC6CSP-★ BC6CSP-★01	57
16	9.6	2	3	5	5	1	2	3 3	1 N.O. 1 N.C.	BC7CSP-★ BC7CSP-★01	78

Coil voltage selection


★ Coil voltage suffix. Refer to Coil Voltage Selection Chart and substitute the desired coil voltage suffix for the ★.

Coil voltage selection chart


	Volts								
	12	24	42	48	110/125	110/120	220	220/240	380/415
AC 40-450 Hz		F	L	G		1		2	M
DC	U	Y	V	W	P		R		

Mechanically interlocked B6 & B7 contactors 3 Phase

Miniature
controls



VB6M-1



VB7M-1

Mechanically interlocked with screw connections

General purpose AC1	Maximum motor FLA AC3	3 Phase motor horsepower				Single phase		Number of power poles	Auxiliary contacts	Catalog number	List price
		208V	230V	460V	600V	120V	230V				
AC operated											
12	6.8	1	2	3	1	1/2	1	3	1 N.O. 1 N.C.	VB6M-★ VB6M-★01	\$ 104
16	9.6	2	3	5	5	1	2	3	1 N.O. 1 N.C.	VB7M-★ VB7M-★01	143
DC operated											
12	6.8	1	2	3	1	1/2	1	3	1 N.O. 1 N.C.	VBC6M-★ VBC6M-★01	105
16	9.6	2	3	5	5	1	2	3	1 N.O. 1 N.C.	VBC7M-★ VBC7M-★01	156

4

Mechanically interlocked with flat pin connections

General purpose AC1	Maximum motor FLA AC3	3 Phase motor horsepower				Single phase		Number of power poles	Auxiliary contacts	Catalog number	List price
		208V	230V	460V	600V	120V	230V				
AC operated											
12	6.8	1	2	3	1	1/2	1	3	1 N.O. 1 N.C.	VB6MFP-★ VB6MFP-★01	\$ 104
16	9.6	2	3	5	5	1	2	3	1 N.O. 1 N.C.	VB7MFP-★ VB7MFP-★01	143
DC operated											
12	6.8	1	2	3	1	1/2	1	3	1 N.O. 1 N.C.	VBC6MFP-★ VBC6MFP-★01	105
16	9.6	2	3	5	5	1	2	3	1 N.O. 1 N.C.	VBC7MFP-★ VBC7MFP-★01	156

Mechanically interlocked with soldering pin connections

General purpose AC1	Maximum motor FLA AC3	3 Phase motor horsepower				Single phase		Number of power poles	Auxiliary contacts	Catalog number	List price
		208V	230V	460V	600V	120V	230V				
AC operated											
12	6.8	1	2	3	1	1/2	1	3	1 N.O. 1 N.C.	VB6MSP-★ VB6MSP-★01	\$ 104
16	9.6	2	3	5	5	1	2	3	1 N.O. 1 N.C.	VB7MSP-★ VB7MSP-★01	143
DC operated											
12	6.8	1	2	3	1	1/2	1	3	1 N.O. 1 N.C.	VBC6MSP-★ VBC6MSP-★01	105
16	9.6	2	3	5	5	1	2	3	1 N.O. 1 N.C.	VBC7MSP-★ VBC7MSP-★01	156

Coil voltage selection

★ Coil voltage suffix. Refer to Coil Voltage Selection Chart and substitute the desired coil voltage suffix for the ★.

Coil voltage selection chart

	Volts								
	12	24	42	48	110/125	110/120	220	220/240	380/415
AC 40-450 Hz		F	L	G		1		2	M
DC	U	Y	V	W	P		R		

Interface B6 & B7 contactors^① 3 Phase

4



BC6-2.4



BC7-2.4

Non-reversing with screw connections

General purpose AC1	Maximum motor FLA AC3	3 Phase motor horsepower				Single phase		Number of power poles	Auxiliary contacts	Catalog number	List price
		208V	230V	460V	600V	120V	230V				
DC operated — 24VDC (1.4W low power consumption)											
12	6.8	1	2	3	1	1/2	1	3	1 N.O. 1 N.C.	BC6-1.4 BC6-01-1.4	\$ 57
16	9.6	2	3	5	5	1	2	3	1 N.O. 1 N.C.	BC7-1.4 BC7-01-1.4	80
DC operated — 17 – 32VDC (2.4W low power consumption)											
12	6.8	1	2	3	1	1/2	1	3	1 N.O. 1 N.C.	BC6-2.4 BC6-01-2.4	63
16	9.6	2	3	5	5	1	2	3	1 N.O. 1 N.C.	BC7-2.4 BC7-01-2.4	80

Non-reversing with flat pin connections

General purpose AC1	Maximum motor FLA AC3	3 Phase motor horsepower				Single phase		Number of power poles	Auxiliary contacts	Catalog number	List price
		208V	230V	460V	600V	120V	230V				
DC operated — 24VDC (1.4W low power consumption)											
12	6.8	1	2	3	1	1/2	1	3	1 N.O. 1 N.C.	BC6FP-1.4 BC6FP-01-1.4	\$ 57
16	9.6	2	3	5	5	1	2	3	1 N.O. 1 N.C.	BC7FP-1.4 BC7FP-01-1.4	80
DC operated — 17 – 32VDC (2.4W low power consumption)											
12	6.8	1	2	3	1	1/2	1	3	1 N.O. 1 N.C.	BC6FP-2.4 BC6FP-01-2.4	63
16	9.6	2	3	5	5	1	2	3	1 N.O. 1 N.C.	BC7FP-2.4 BC7FP-01-2.4	80

Non-reversing with soldering pin connections

General purpose AC1	Maximum motor FLA AC3	3 Phase motor horsepower				Single phase		Number of power poles	Auxiliary contacts	Catalog number	List price
		208V	230V	460V	600V	120V	230V				
DC operated — 24VDC (1.4W low power consumption)											
12	6.8	1	2	3	1	1/2	1	3	1 N.O. 1 N.C.	BC6SP-1.4 BC6SP-01-1.4	\$ 57
16	9.6	2	3	5	5	1	2	3	1 N.O. 1 N.C.	BC7SP-1.4 BC7SP-01-1.4	80
DC operated — 17 – 32VDC (2.4W low power consumption)											
12	6.8	1	2	3	1	1/2	1	3	1 N.O. 1 N.C.	BC6SP-2.4 BC6SP-01-2.4	63
16	9.6	2	3	5	5	1	2	3	1 N.O. 1 N.C.	BC7SP-2.4 BC7SP-01-2.4	80


Interface contactors cannot utilize auxiliary contacts.

Contactors for connection to PLCs^① 3 Phase

Miniature
controls



B6SC-2.8




B7SC-2.8

Non-reversing with screw connections


General purpose AC1	Maximum motor FLA AC3	3 Phase motor horsepower				Single phase		Number of power poles	Auxiliary contacts	Catalog number	List price
		208V	230V	460V	600V	120V	230V				
DC operated – 24VDC (1.4W low power consumption)											
12	6.8	1	2	3	1	1/2	1	3	1 N.O. 1 N.C.	B6SC-1.7 B6SC-01-1.7	\$ 65
16	9.6	2	3	5	5	1	2	3	1 N.O. 1 N.C.	B7SC-1.7 B7SC-01-1.7	69
DC operated – 17 – 32VDC (2.4W low power consumption)											
12	6.8	1	2	3	1	1/2	1	3	1 N.O. 1 N.C.	B6SC-2.8 B6SC-01-2.8	65
16	9.6	2	3	5	5	1	2	3	1 N.O. 1 N.C.	B7SC-2.8 B7SC-01-2.8	69

4

Oscillograms typical operation




Switching off of interface contactors BC6, BC7, coil voltage 24 VDC.



Switching off of B6S, B7S coil voltage 24VDC which provides electrically noiseless operation

Contactors for connection to PLCs cannot utilize auxiliary contacts.

Thermal overload relays T7DU



T7DU

Thermal overload relay — for contactors B6,B7, BC6, BC7, B6S, B7S, VB6(7), VBC6(7), VB6A(7A), VBC6A(7A)

Setting range Amps	Catalog number	List price
0.1 – 0.16	T7DU0.16	\$ 48
0.16 – 0.24	T7DU0.24	
0.24 – 0.4	T7DU0.4	
0.4 – 0.6	T7DU0.6	
0.6 – 1.0	T7DU1.0	
1.0 – 1.6	T7DU1.6	
1.6 – 2.4	T7DU2.4	
2.4 – 4.0	T7DU4.0	
4.0 – 6.0	T7DU6.0	
6.0 – 9.0	T7DU9.0	
9.0 – 12.0	T7DU12.0	

Loading capacity of auxiliary switches

Type	T7DU			
	N.C. 95 – 96	N.O. 97 – 98		
Rated operating voltage U_e/V IEC / UL508	V	500 / 300	500 / 300	
Thermal current	A	6	6	
Rated operating current I_e	at AC-15 220/240 V	A	1.5	1.5
	at AC-15 380/415 V	A	0.7	0.5
	at AC-15 500 V	A	0.5	0.3
	at DC-15 220 V	A	0.2	0.2
Pilot duty rating	AC	A300	A300	
	DC	P300	P300	
General use	240V	1.5A	1.5A	
	600V	0.6A	0.6A	

Thermal overload relay T7DU

Setting range A – A	Short circuit protection (fuses, circuit breakers)				Resistance per phase W	Joule losses per phase at upper current setting W
	Coordination Type 2 (IEC) gL/gG A	Coordination Type 1(IEC) gL/gG A	600V, 5kA			
			Fuse	MCCB		
0.1 – 0.16	0.5	20	1	15A	62.3	1.6
0.16 – 0.24	1	20	1	15A	27	1.6
0.24 – 0.4	2	20	1	15A	11.7	1.9
0.4 – 0.6	2	20	1	15A	4.61	1.7
0.6 – 1.0	4	20	3	15A	1.66	1.7
1.0 – 1.6	6	20	6	15A	0.63	1.6
1.6 – 2.4	6	20	6	15A	0.27	1.6
2.4 – 4.0	10	20	15	15A	0.107	1.7
4.0 – 6.0	10	20	20	15A	0.049	1.8
6.0 – 9.0	10	20	35	15A	0.021	1.7
9.0 – 12.0	20	20	45	15A	0.010	1.4


Electronic overload relays

See pages 2.19 to 2.30.

Non-reversing & reversing B6 & B7 starters ①

3 Phase

Miniature controls

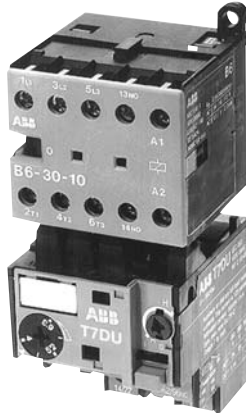

B6S-33

Non-Reversing, 3 phase – Screw connections only

General purpose AC1	Maximum motor FLA AC3	3 Phase motor horsepower				Single phase		Number of power poles	Auxiliary contacts	Catalog number	List price
		208V	230V	460V	600V	120V	230V				
AC operated											
12	6.8	1	2	3	1	1/2	1	3	1 N.O. 1 N.C.	B6S-33 B6S-3013	\$ 108
16	9.6	2	3	5	5	1	2	3	1 N.O. 1 N.C.	B7S-33 B7S-3013	132
DC operated											
12	6.8	1	2	3	1	1/2	1	3	1 N.O. 1 N.C.	BC6S-33 BC6S-3013	114
16	9.6	2	3	5	5	1	2	3	1 N.O. 1 N.C.	BC7S-33 BC7S-3013	138

★ Coil voltage suffix. Refer to Coil Voltage Selection chart and substitute the desired coil voltage suffix for the ★.

◆ Overload relay suffix. Refer to the Overload Relay Selection chart and substitute the desired starter suffix code for the ★.

Reversing, 3 phase – Screw connections only

General purpose AC1	Maximum motor FLA AC3	3 Phase motor horsepower				Single phase		Number of power poles	Auxiliary contacts	Catalog number	List price
		208V	230V	460V	600V	120V	230V				
AC operated											
12	6.8	1	2	3	1	1/2	1	3	1 N.O. 1 N.C.	B6SR-33 B6SR-3013	\$ 179
16	9.6	2	3	5	5	1	2	3	1 N.O. 1 N.C.	B7SR-33 B7SR-3013	218
DC operated											
12	6.8	1	2	3	1	1/2	1	3	1 N.O. 1 N.C.	BC6SR-33 BC6SR-3013	180
16	9.6	2	3	5	5	1	2	3	1 N.O. 1 N.C.	BC7SR-33 BC7SR-3013	231

★ Coil voltage suffix. Refer to Coil Voltage Selection chart and substitute the desired coil voltage suffix for the ★.

◆ Overload relay suffix. Refer to the Overload Relay Selection chart and substitute the desired starter suffix code for the ★.

Coil voltage selection

	Volts								
	12	24	42	48	110/125	110/120	220	220/240	380/415
AC 40-450 Hz	F	L	G			1		2	M
DC	U	Y	V	W	P		R		

Overload relay selection

T7DU – Thermal overload

Catalog number	Current setting range	Starter range code
T7DU0.16	0.1 – 0.16	A
T7DU0.24	0.16 – 0.24	B
T7DU0.4	0.24 – 0.4	C
T7DU0.6	0.4 – 0.6	D
T7DU1.0	0.6 – 1.0	E
T7DU1.6	1.0 – 1.6	F
T7DU2.4	1.6 – 2.4	G
T7DU4.0	2.4 – 4.0	H
T7DU6.0	4.0 – 6.0	J
T7DU9.0	6.0 – 9.0	K
T7DU12.0	9.0 – 12.0	L

E16DU – Electronic overload

Catalog number	Current setting range	Current tripping class	Starter range code
E16DU0.32-10	0.1 – 0.32	10	A1
E16DU1.0-10	0.3 – 1.0	10	B1
E16DU2.7-10	0.9 – 2.7	10	C1
E16DU6.3-10	2.0 – 6.3	10	D1
E16DU18.9-10	5.7 – 18.9	10	E1
E16DU0.32-20	0.1 – 0.32	20	A2
E16DU1.0-20	0.3 – 1.0	20	B2
E16DU2.7-20	0.9 – 2.7	20	C2
E16DU6.3-20	2.0 – 6.3	20	D2
E16DU18.9-20	5.7 – 18.9	20	E2
E16DU0.32-30	0.1 – 0.32	30	A3
E16DU1.0-30	0.3 – 1.0	30	B3
E16DU2.7-30	0.9 – 2.7	30	C3
E16DU6.3-30	2.0 – 6.3	30	D3
E16DU18.9-30	5.7 – 18.9	30	E3

① For enclosed miniature starters, please consult factory for catalog number and pricing.

Non-reversing B6 & B7 starters ①

Single phase

4

Non-Reversing, Single phase – Screw connections only

General purpose AC1	Maximum motor FLA AC3	Single phase		Number of power poles	Auxiliary contacts	Catalog number	List price
		120V	230V				
AC operated							
12	6.8	1/2	1	3	1 N.O. 1 N.C.	B6SS-★★ B6SS-★01★	\$ 108
16	9.6	1	2	3	1 N.O. 1 N.C.	B7SS-★★ B7SS-★01★	132
DC operated							
12	6.8	1/2	1	3	1 N.O. 1 N.C.	BC6SS-★★ BC6SS-★01★	114
16	9.6	1	2	3	1 N.O. 1 N.C.	BC7SS-★★ BC7SS-★01★	138

★ Coil voltage suffix. Refer to Coil Voltage Selection chart and substitute the desired coil voltage suffix for the ★.
◆ Overload relay suffix. Refer to the Overload Relay Selection chart and substitute the desired starter suffix code for the ★.

Coil voltage selection

	Volts								
	12	24	42	48	110/125	110/120	220	220/240	380/415
AC 40-450 Hz		F	L	G		1		2	M
DC	U	Y	V	W	P		R		

Overload relay selection

T7DU – Thermal overload

Catalog number	Current setting range	Starter range code
T7DU0.16	0.1 – 0.16	A
T7DU0.24	0.16 – 0.24	B
T7DU0.4	0.24 – 0.4	C
T7DU0.6	0.4 – 0.6	D
T7DU1.0	0.6 – 1.0	E
T7DU1.6	1.0 – 1.6	F
T7DU2.4	1.6 – 2.4	G
T7DU4.0	2.4 – 4.0	H
T7DU6.0	4.0 – 6.0	J
T7DU9.0	6.0 – 9.0	K
T7DU12.0	9.0 – 12.0	L

E16DU – Electronic overload

Catalog number	Current setting range	Current tripping class	Starter range code
E16DU0.32-10	0.1 – 0.32	10	A1
E16DU1.0-10	0.3 – 1.0	10	B1
E16DU2.7-10	0.9 – 2.7	10	C1
E16DU6.3-10	2.0 – 6.3	10	D1
E16DU18.9-10	5.7 – 18.9	10	E1
E16DU0.32-20	0.1 – 0.32	20	A2
E16DU1.0-20	0.3 – 1.0	20	B2
E16DU2.7-20	0.9 – 2.7	20	C2
E16DU6.3-20	2.0 – 6.3	20	D2
E16DU18.9-20	5.7 – 18.9	20	E2
E16DU0.32-30	0.1 – 0.32	30	A3
E16DU1.0-30	0.3 – 1.0	30	B3
E16DU2.7-30	0.9 – 2.7	30	C3
E16DU6.3-30	2.0 – 6.3	30	D3
E16DU18.9-30	5.7 – 18.9	30	E3

① For enclosed miniature starters, please consult factory for catalog number and pricing.

Control relays AC & DC operated

Miniature
controls



K640-1



KC631-1

Control relays with screw connections

	Contact configuration		Catalog number	List price
	N.O.	N.C.		
AC Operated	4 3 2	0 1 2	K640-★ K631-★ K622-★	\$ 48
DC Operated	4 3 2	0 1 2	KC640-★ KC631-★ KC622-★	54

4

Control relays with flat pin connections

	Contact configuration		Catalog number	List price
	N.O.	N.C.		
AC Operated	4 3 2	0 1 2	K640FP-★ K631FP-★ K622FP-★	\$ 48
DC Operated	4 3 2	0 1 2	KC640FP-★ KC631FP-★ KC622FP-★	54

Control relays with soldering pin connections

	Contact configuration		Catalog number	List price
	N.O.	N.C.		
AC Operated	4 3 2	0 1 2	K640SP-★ K631SP-★ K622SP-★	\$ 48
DC Operated	4 3 2	0 1 2	KC640SP-★ KC631SP-★ KC622SP-★	54

Coil voltage selection

★ Coil voltage suffix. Refer to Coil Voltage Selection Chart and substitute the desired coil voltage suffix for the ★.

Coil voltage selection chart

	Volts								
	12	24	42	48	110/125	110/120	220	220/240	380/415
AC 40-450 Hz		F	L	G		1		2	M
DC	U	Y	V	W	P		R		

Interface relays ^① DC operated

4



KC640-1.4



BC7-2.4

Interface relays with screw connections

	Contact configuration		Catalog number	List price
	N.O.	N.C.		
DC Operated – 24VDC (1.4W low power consumption)	4	0	KC640-1.4 KC631-1.4	\$ 59
	3	1		
DC Operated – 17 – 32VDC (2.4W low power consumption)	4	0	KC640-2.4 KC631-2.4	59
	3	1		

Interface relays with flat pin connections

	Contact configuration		Catalog number	List price
	N.O.	N.C.		
DC Operated – 24VDC (1.4W low power consumption)	4	0	KC640FP-1.4 KC631FP-1.4	\$ 59
	3	1		
DC Operated – 17 – 32VDC (2.4W low power consumption)	4	0	KC640FP-2.4 KC631FP-2.4	59
	3	1		

Interface relays with soldering pin connections

	Contact configuration		Catalog number	List price
	N.O.	N.C.		
DC Operated – 24VDC (1.4W low power consumption)	4	0	KC640SP-1.4 KC631SP-1.4	\$ 59
	3	1		
DC Operated – 17 – 32VDC (2.4W low power consumption)	4	0	KC640SP-2.4 KC631SP-2.4	59
	3	1		

^① Interface relays cannot utilize auxiliary contacts.

Accessories for B6 & B7 contactors

Miniature
controls



Auxiliary contact blocks

Item description	Contact configuration	Catalog number ①	List price	
Side mounted auxiliary contact blocks, 1 N.O. & 1 N.C.				
Screw connection type				
• KC6 & K6 relay	1 N.O. & 1 N.C.	CA6-11K	\$ 15	
• B6 or BC6; B7 or BC7 4 pole contactor	1 N.O. & 1 N.C.	CA6-11E		
• B6 or BC6; B7 or BC7 3 pole contactor, 1 N.O.	1 N.O. & 1 N.C.	CA6-11M		
• B6 or BC6; B7 or BC7 3 pole contactor, 1 N.C.	1 N.O. & 1 N.C.	CA6-11N		
Flat pin connection type				
• KC6 & K6 relay	1 N.O. & 1 N.C.	CA6-11K-F		
• B6 or BC6; B7 or BC7 4 pole contactor	1 N.O. & 1 N.C.	CA6-11E-F		
• B6 or BC6; B7 or BC7 3 pole contactor, 1 N.O.	1 N.O. & 1 N.C.	CA6-11M-F		
• B6 or BC6; B7 or BC7 3 pole contactor, 1 N.C.	1 N.O. & 1 N.C.	CA6-11N-F		
Soldering pin connection type				
• KC6 & K6 relay	1 N.O. & 1 N.C.	CA6-11K-P		
• B6 or BC6; B7 or BC7 4 pole contactor	1 N.O. & 1 N.C.	CA6-11E-P		
• B6 or BC6; B7 or BC7 3 pole contactor, 1 N.O.	1 N.O. & 1 N.C.	CA6-11M-P		
• B6 or BC6; B7 or BC7 3 pole contactor, 1 N.C.	1 N.O. & 1 N.C.	CA6-11N-P		
Front mounted auxiliary contact blocks, 1 N.O. & 1 N.C.				
Screw connection type				
• KC6 & K6 relay	1 N.O. & 1 N.C.	CAF6-11K	\$ 15	
• KC6 & K6 relay	2 N.O. & 0 N.C.	CAF6-20K		
• KC6 & K6 relay	0 N.O. & 2 N.C.	CAF6-02K		
• B6 or BC6; B7 or BC7 4 pole contactor, VB(C)...	1 N.O. & 1 N.C.	CAF6-11E		
• B6 or BC6; B7 or BC7 4 pole contactor, VB(C)...	2 N.O. & 0 N.C.	CAF6-20E		
• B6 or BC6; B7 or BC7 4 pole contactor, VB(C)...	0 N.O. & 2 N.C.	CAF6-02E		
• B6 or BC6; B7 or BC7 3 pole contactor, 1 N.O., VB(C)...	1 N.O. & 1 N.C.	CAF6-11M		
• B6 or BC6; B7 or BC7 3 pole contactor, 1 N.O., VB(C)...	2 N.O. & 0 N.C.	CAF6-20M		
• B6 or BC6; B7 or BC7 3 pole contactor, 1 N.O., VB(C)...	0 N.O. & 2 N.C.	CAF6-02M		
• B6 or BC6; B7 or BC7 3 pole contactor, 1 N.C., VB(C)...	1 N.O. & 1 N.C.	CAF6-11N		
• B6 or BC6; B7 or BC7 3 pole contactor, 1 N.C., VB(C)...	2 N.O. & 0 N.C.	CAF6-20N		
• B6 or BC6; B7 or BC7 3 pole contactor, 1 N.C., VB(C)...	0 N.O. & 2 N.C.	CAF6-02N		

4

Soldering connection

Item description	Catalog number	List price
For mini contactors, B, BC, K, & KC For 2 pole auxiliary contacts	LB6 LB6-CA	\$ 15 8

Plunger

Item description	Catalog number	List price
For manual operation	BN6	\$ 15

Identification labels

Item description	Catalog number	List price
50 clip-on label holders, 60 non-adhesive labels 50 transparent covers, 75 self adhesive labels	BA50	\$ 30

① Miniature contactors and control relays can use either front or side mounted auxiliary blocks but not both.

Accessories for B6 & B7 contactors

4



RV-BC6/...



LT6-B



Line side (L)



Load side (T)

BSM6-30

Surge suppressors

Item description	Voltage	Catalog number	List price
Varistor type surge suppressor for DC operated coils	24 – 60V	RV-BC6/60	\$ 24
	110 – 250V	RV-BC6/250	
	200 – 420V	RV-BC6/380	




Protective cover

Item description	Catalog number	List price
For contactors B, BC, K, & KC6 with screw connection	LT6-B	\$ 15

Reversing connection link

Item description	Catalog number	List price
For compact interlocking contactors with screw connection	BSM6-30	\$ 12

D.C. Power Circuit Switching


Utilization category			DC-1 L/R ≤ 1 ms	DC-3 L/R ≤ 2 ms	DC-5 L/R ≤ 7.5 ms
	24 V	A	16.0	16.0	16.0
	48 V	A	16.0	8.0	2.0
	60 V	A	16.0	4.0	1.25
	110 V	A	7.0	1.5	0.4
	220 V	A	0.8	0.25	0.2
	24 V	A	16.0	16.0	16.0
	48 V	A	16.0	16.0	16.0
	60 V	A	16.0	15.0	12.0
	110 V	A	16.0	7.0	2.0
	220 V	A	5.0	1.5	0.5
	24 V	A	16.0	16.0	16.0
	48 V	A	16.0	16.0	16.0
	60 V	A	16.0	16.0	16.0
	110 V	A	16.0	15.0	8.0
	220 V	A	14.0	4.0	2.0

Electrical Durability Curves for DC-1, DC-3 and DC-5

The curves below take into account the time constant L/R for each utilization category and show the electrical durability of the contactors during DC-1, DC-3 and DC-5 use for 3 poles connected in series.

If one single pole is used, the corresponding breaking capacity (W) is reduced to 1/3 and for 2 poles connected in series it is reduced to 2/3.

- A = DC-1 3 poles in series
- B = DC-3 3 poles in series
- C = DC-5 3 poles in series



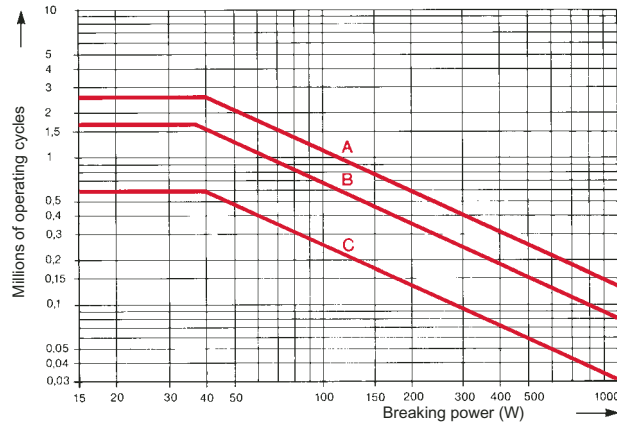


IEC Technical data

B6 Contactors & K6 control relays

Auxiliary contacts & magnetic coils

4

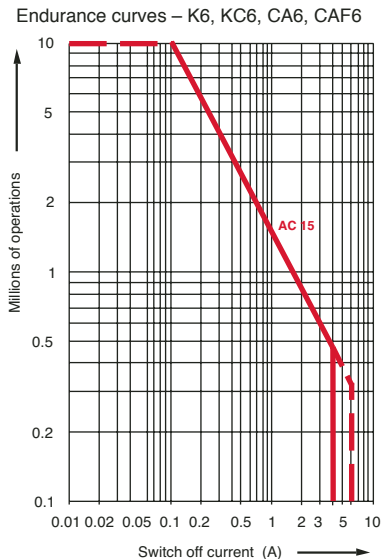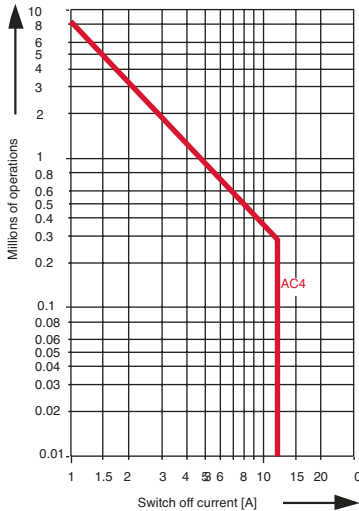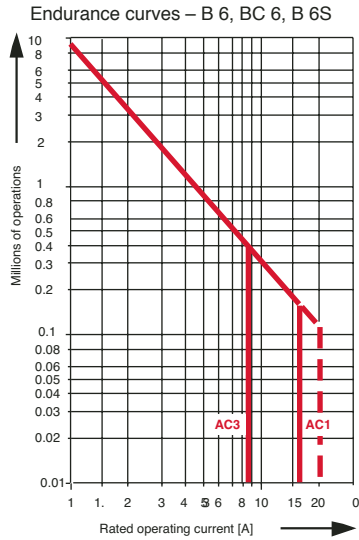

B6 contactors & K6 control relays

Rated insulating voltage	V_i	500			
Permissible ambient temperature					
Contactor without relay	°C	– 25 ... + 55			
Contactor with relay	°C	– 25 ... + 50			
Storage temperature	°C	– 40 ... + 80			
Climatic resistance	acc. to DIN 50 017 acc. to UTE C 63-100	alternating climate proof 30 cycles, version 1			
Mounting position		optional			
Mechanical endurance	10 million operations				
Max. switching frequency	AC 1 cyc./h AC 2/AC 3 cyc./h	300 600			
Rated operating voltage	V_e	12 to 500			
Rated operating current	I_e /AC 1, AC 3	AC 1/ I_e A		AC 2, AC 3	
Rated operating power		55 °C	40 °C	I_e A	P kW
	220/240 V	16	20	9	2.2
	380/440 V	16	20	9/8	4.0
	500 V	12	12	5.5	3.0
Switching times		B6	BC6	K6	KC6
Closing delay	NO ms	20 to 26		20 to 26	
Opening delay	NO ms	16 to 20	4 to 6	16 to 20	4 to 6
Closing delay	NC ms	16 to 20	4 to 6	16 to 20	4 to 6
Opening delay	NC ms	14 to 18		14 to 18	

Auxiliary Contacts and Magnetic Coils

Rated operating voltage	V_e	VDC	12 to 240	
		VAC	12 to 500	
Conventional rated thermal current	I_{th}	A	6	
Rated operating current	I_e /AC 15 at V_e			
	220/240 V	A	4	
	380/440 V	A	3	
	500 V	A	2	
Rated operating current	I_e /DC 13 at V_e			
	24 V	A	2.5	
	60 V	A	1.2	
	110 V	A	0.7	
	220/240 V	A	0.4	
Rated power of magnetic coils				
Basic contactors			closing /holding	
B6 / K6, VB6	AC	VA	3.5	
BC6 / KC 6, VBC6	DC	W	3.5	
Interface contactors				
BC6 / KC6-1.4	DC	• 24 • V W	1.4	
BC6 / KC6-2.4	DC	17 ... 32 V W	2.4	
Mini contactor for connection to PLC's			cold	warm
			I mA	P W
B6 S-1.7	DC	+ 24 + V W	77	1.75
B6 S-2.8	DC	+17 ... 32 +V W	125	2.80
Coil voltage range			0.8 ... 1.1x V_e	

IEC Technical data



B7 contactors

Magnetic coils

Miniature controls

4

Endurance curves – B 7, BC 7, B 7S

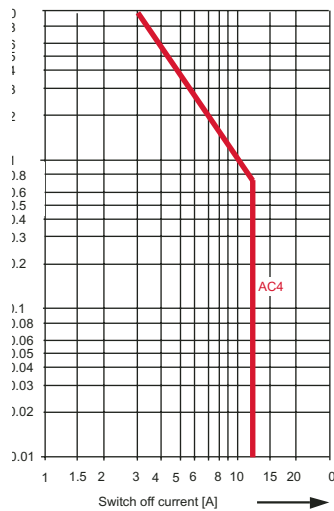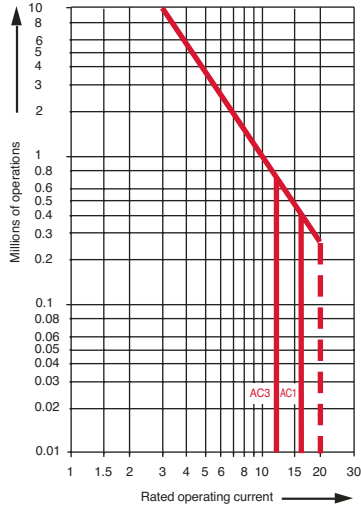

B7 contactors

Rated insulating voltage	V_i	500				
Permissible ambient temperature	°C	- 25 ... + 55				
Contactor without relay	°C	- 25 ... + 50				
Contactor with relay	°C	- 40 ... + 80				
Storage temperature	°C	- 40 ... + 80				
Climatic resistance	acc. to DIN 50 017 acc. to UTE C 63-100	alternating climate proof 30 cycles, version 1				
Mounting position		optional				
Mechanical endurance	10 million operations					
Max. switching frequency	AC 1 cyc./h AC 2/AC 3 cyc./h	300 600				
Rated operating voltage V_e	VAC	12 to 500				
Rated operating current I_e /AC 1, AC 3		AC 1/ I_e A		AC 2, AC 3		
Rated operating power		55 °C	40 °C	I_e A	P kW	
	220/240 V	16	20	12/11	3	
	380/440 V	16	20	12/11	5.5	
	500 V	12	12	7	4	
Switching times		B7	BC7			
Closing delay	NO	20 to 26				
Opening delay		16 to 20	4 to 6			
Closing delay	NC	16 to 20				
Opening delay		14 to 18	4 to 6			
Shock resistance B6, B7 standard mounting position		1/2 sinusoidal shock, 10 ms: no change in contact position				
		A	B1	B2	C1	C2
	shock directions contactor switched on	20 g	20 g	20 g	20 g	20 g
	contactor switched off	10 g	20 g	20 g	20 g	20 g

Magnetic Coils

Coil voltage range	0.8...1.1x U_c					
Rated power of magnetic coils	closing /holding					
Basic contactors						
B7 / VB7	AC	VA	3.5			
BC7 / VBC7	DC	W	3.5			
Interface contactors						
BC7-1.4	DC	+ 24 V	W	1.4		
BC7-2.4	DC	+17 ... 32 V	W	2.4		
Mini contactor for connection to PLC's			cold	warm		
			I (mA)	P (W)	I (mA)	P (W)
B7 S-1.7	DC	+ 24 V	77	1.75	60	1.35
B7 S-2.8	DC	+17 ... 32 V	125	2.80	94	2.10

Switching of light fittings

The following tables show the number of lamps which can be connected per phase at 230 V/ 60 Hz. Note the following:


- 4 a) Increased current consumption for 1.1 times the rated voltage is considered.
- b) Failure of about 5% of the lamps is considered since not ignited lamps additionally charge the contactor with their preheating current.
- c) This data only apply to connection of the lamps at main pole terminals 1 ...8

Lamp type	Lamp data			Permissible number of lamps per phase (230 V, 60 Hz) for contactor type B6, B7, BC6, BC7
	Watt	cm	A	
Incandescent lamps	60		0.27	20
	100		0.45	12
	200		0.91	6
	300		1.36	4
	500		2.27	2
	1000		4.5	1
Fluorescent lamps uncompensated	15	44	0.35	25
	20	59	0.37	23
	40	120	0.43	20
	42	105	0.54	16
	65	150	0.67	12
	115	120	1.5	5
	140	150	1.5	5
Fluorescent lamps in two-lamp circuit	2 x 20	59	2 x 0.13	2 x 26 lamp pairs
	2 x 40	120	2 x 0.22	2 x 20
	2 x 42	105	2 x 0.24	2 x 16
	2 x 65	150	2 x 0.34	2 x 12
	2 x 115	120	2 x 0.65	2 x 5
	2 x 140	150	2 x 0.75	2 x 5
Metal halogen lamps uncompensated	35		0.53	10
	70		1.0	5
	150		1.8	3
	250		3.0	2
	400		3.5	1
Low pressure sodium vapor lamps uncompensated	35		1.5	4
	55		1.5	4
	90		2.4	2
	135		3.5	2
	150		3.3	2
	180		3.3	2
	200		2.3	2
High pressure mercury vapor lamps uncompensated	150		1.8	3
	250		3.0	2
	330		3.7	2
	400		4.7	1
High pressure mercury vapor lamps uncompensated	50		0.61	10
	80		0.8	7
	125		1.15	5
	250		2.15	3
	400		3.25	2
	700		5.40	1

Endurance curves for DC1, DC3, DC5

The following shows endurance curves for DC1, DC3 and DC5 for 3 poles in series. If only one current path is used, the corresponding breaking capacity is multiplied by 0.33, for two current paths by 0.66.


Varying time constants L/R (ms) have been considered.

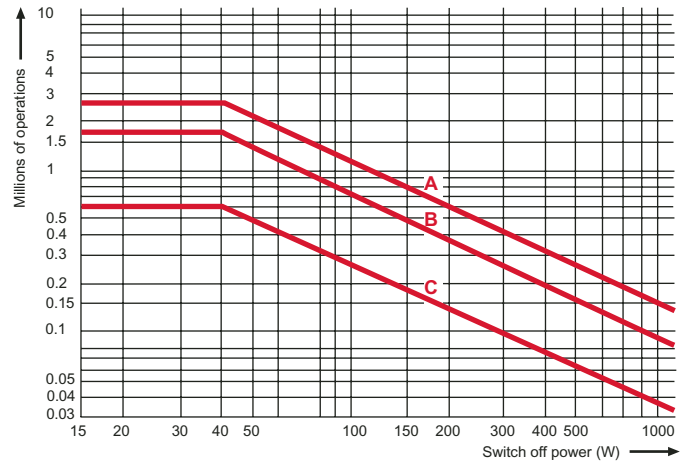


- A = 3 poles in series DC 1
- B = 3 poles in series DC 3
- C = 3 poles in series DC 5

IEC Technical data Pole configurations


Miniature contactors



B6(7)-40-00 ...
BC6(7)-40-00 ...




B6(7)-30-10 ...
BC6(7)-30-10 ...




B6(7)-30-01 ...
BC6(7)-30-01 ...

Miniature mechanically interlocked contactors

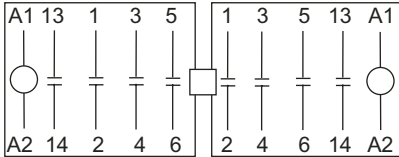


VB6(7)-30-10 ...
VBC6(7)-30-10 ...

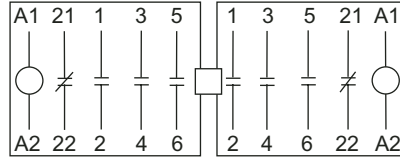


VB6(7)-30-01 ...
VBC6(7)-30-01 ...


Miniature control relays



K6-40 E ...
KC6-40 E ...




K6-31 Z ...
KC6-31 Z ...




K6-22 Z ...
KC6-22 Z ...


Side mounted auxiliary contact blocks

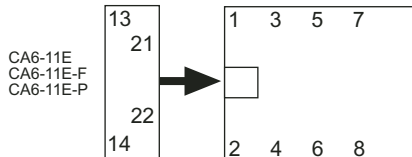


B6(7)-40-00
B6(7)-40-00-F
B6(7)-40-00-P
BC6(7)-40-00

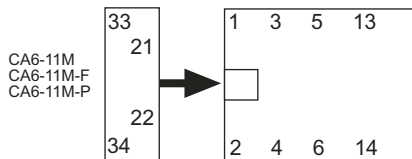

B6(7)-30-10
B6(7)-30-10-F
B6(7)-30-10-P
BC6(7)-30-10

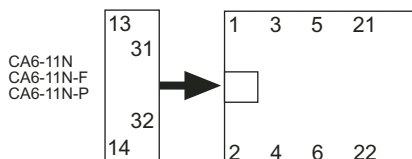


B6(7)-30-01
B6(7)-30-01-F
B6(7)-30-01-P
BC6(7)-30-01

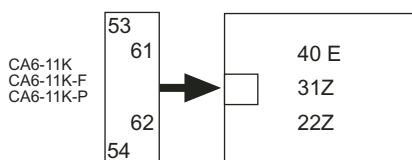


K6 ...
K6 ... F
K6 ... P
KC6 ...


Front mounted auxiliary contact blocks




B6(7)-40-00
B6(7)-40-00-F
B6(7)-40-00-P
BC6(7)-40-00




1 = CAF6-11E
2 = CAF6-20E
3 = CAF6-02E




B6(7)-30-10
B6(7)-30-10-F
B6(7)-30-10-P
BC6(7)-30-10




1 = CAF6-11M
2 = CAF6-20M
3 = CAF6-02M




B6(7)-30-01
B6(7)-30-01-F
B6(7)-30-01-P
BC6(7)-30-01



1 = CAF6-11N
2 = CAF6-20N
3 = CAF6-02N



K6 ...
K6 ... F
K6 ... P
KC6 ...



1 = CAF6-11K
2 = CAF6-20K
3 = CAF6-02K

NOTE: Only side mounted type or front mounted type auxiliary contact blocks can be used at one time. Auxiliary contact blocks must not be mounted on Interface contactors, Interface control relays or contactors for connection to PLCs. Two CAF 6 front mounted auxiliary contact blocks can be installed on the mechanically interlocked contactors VB(C)6(7).

IEC technical data Overload relays

Type	T7DU	
Standards: (major international and European standards)	IEC 947-4-1, UL 508 EN 60 947-4-1	
Approvals, certificates	UL, CSA	
4 Rated insulation voltage U ^I acc. to IEC 158-1, IEC 947-4-1 acc. to IEC / UL 508Ui/V660V / 600V	V	690V
Impulse withstand voltage U _{impkV6} acc. to IEC 947-4-1		
Permissible ambient temperature		
• for storage	°C	-40 to 70
• with compensated operation	°C	
– open	°C	-25° to + 50°C
– enclosed	°C	-25° to + 40°C
Climatic resistance according to	IEC 68-2-3, IEC 68-2-30	
Mounting position	±30° from vertical position not horizontally, not upside down Side by side mounting distance, 5mm	
Resistance to shock	Shock duration ms	10
*Critical shock direction A1, A2	multiple of g	10
Resistance to vibrations (±1 mm, 50 Hz)	multiple of g	—
Mounting	• on contactor	Hooking underneath the contactor, screwing on its main terminal
Terminal types and connecting capacity of main conductors (on motor side)		
• Screw terminals (screw size)		M3.5
• with self-disengaging clamping piece		—
• with terminal block		—
• with busbar or cable lugs		—
• connection cross sections		
• single-core or stranded	Awg/mm ²	2 x 18 – 14 / 2 x 0.75 – 2.5
• flexible with connector sleeve	mm ²	2 x 0.5 – 1.5
Terminals and auxiliary conductors		
• Screw terminals (screw size)		M3.5
• with self-disengaging clamping piece		
• connection cross sections		
• single-core or stranded	Awg/mm ²	2 x 18 – 14 / 2 x 0.75 – 2.5
• flexible with connector sleeve	mm ²	2 x 0.5 – 1.5
Protection degree to IEC 947-1/EN 60 947-1	All terminals are safe from finger-touch and touch by the back of the hand in accordance with VDE 0106, Part 100	
Power pole technical data		
Number of poles	3	
Setting ranges	see order codes	
Tripping class acc. to IEC 947-4-1/EN 60 947-4-1	10A	
Frequency limit	Hz	0 – 400
Switching frequency up to 15 ops./h or 60 ops./h with 40% on load factor without early tripping if starting current not higher than 6 x I _n and starting time not longer than 1s		

Approvals

UL USA	CSA Canada	EZU Czech. Republic	PTB Germany	GL Germany	LRS Great Britain
■	■	□	□	□	□


Legend:

- Standard design approved: identification plates bear the approval marks if it is mandatory
- Submitted for approval

Approximate dimensions Mini contactors & overload relays


00.00 Inches
00.00 [Millimeters]

Mini contactors AC & DC Operated – B6, BC6, B7, BC7

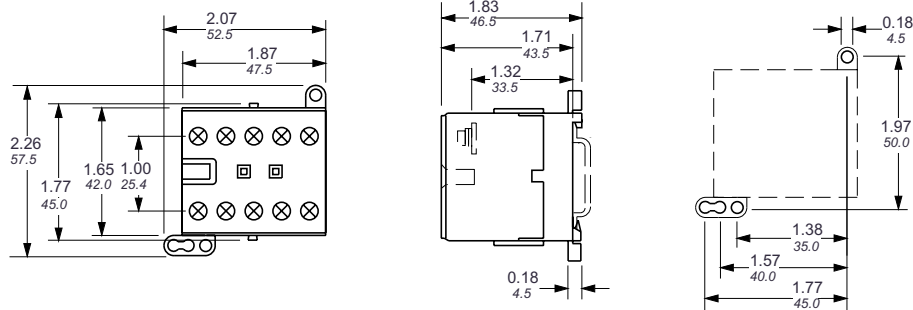


4

Mini contactor with overload relay B6, B7 & T7DU

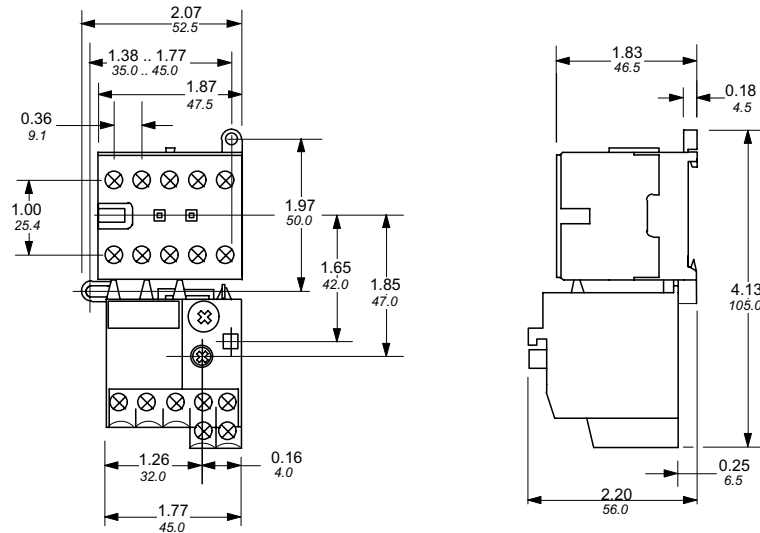

E16DU with B/BC6, B/BC7

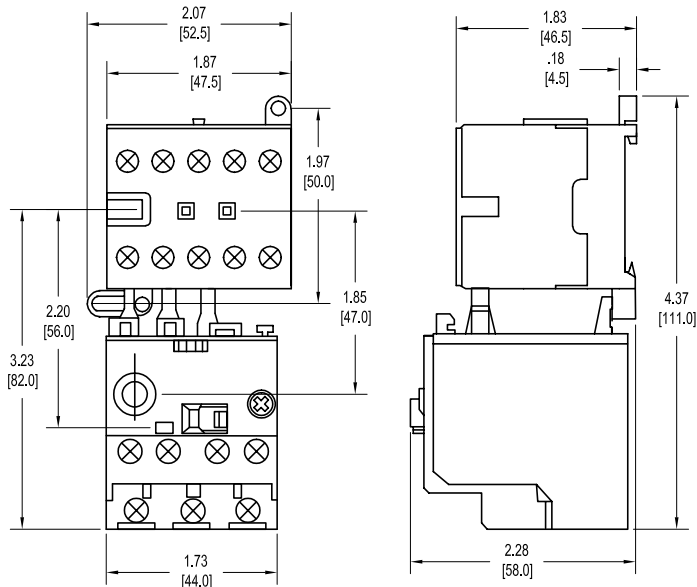

Approximate dimensions

Mechanically interlocked contactors, control relays


Auxiliary contact blocks

00.00 Inches
00.00 [Millimeters]

Mechanically interlocked – AC & DC Operated


VB6M, VBC6M, VB7M, VBC7M

4

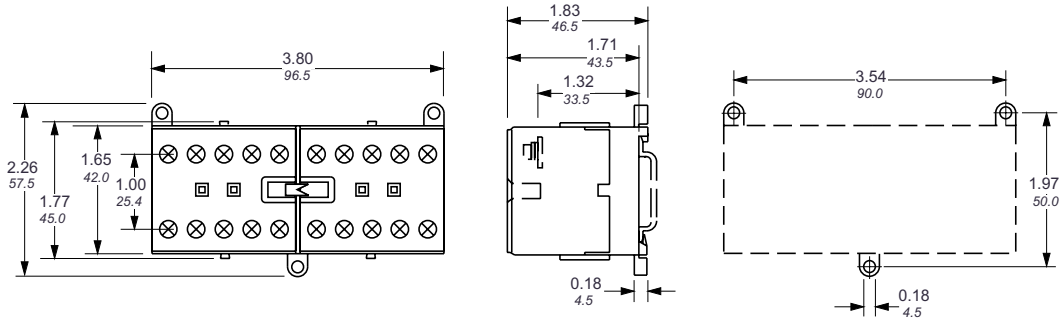


Mini control relays

AC & DC Operated – K6, KC6

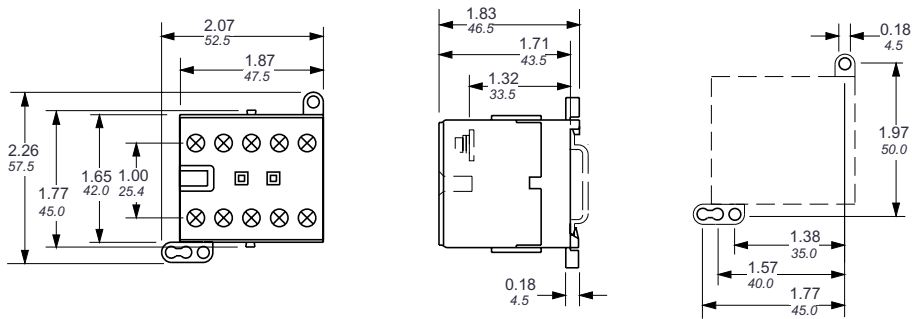

Mini contactor with side mounted auxiliary contact block

B6, B7 & CA6

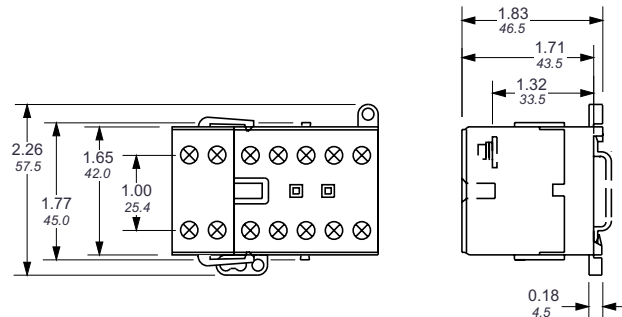

Mini contactor with front mounted auxiliary contact block

B6, B7 & CA6

