

# Technical data

## UL

Pilot Devices  
Type CBG 30mm

### General UL technical data

#### Contact blocks

Rated insulation voltage, UL	600V
Rated thermal current	10A / 600VAC 2.5A / 600VDC
Minimum rating	24VDC, 5mA
Mechanical life (millions of operations)	10
<b>Temperature specifications</b>	
Ambient temperature	-25°C to +40°C
<b>Terminal connections</b>	
Contact blocks	Recommended torque
Minimum	Wire size
Maximum	20 AWG
Lamp assemblies	2 x 12 AWG
Minimum	7 lb. in.
Maximum	20 AWG
Plus-minus pozidrive size 2 screws with DIN washer	2 x 14 AWG

### Contact block terminal marking

Type	1 N.O.	1 N.C.
Catalog number	CBK-CB10(G)	CBK-CB01(G)
Schematic diagram	13      14	21      22

### Approvals

#### CBK, 22mm

NEMA & UL Listed for Types 1, 3R, 4, 4X, 12 & 13 applications

#### CBG, 30mm

NEMA & UL Listed for Types 1, 3R, 4, 4X, 12 & 13 applications

### Contacts – NEMA A600, 10A thermal

Voltage	Inductive amps	Maximum make	Maximum break	Max VA
120 VAC	6A	60A	6A	
240 VAC	3A	30A	3A	
480 VAC	1.5A	15A	1.5A	
600 VAC	1.2A	12A	1.2A	7200VA

### Contacts – NEMA Q600, 5A thermal

Voltage	Maximum make or break current	Maximum make or break volt-amps at 600V or less
125 VDC	.55A	
250 VDC	.27A	
301 – 600 VDC	.10A	69VA


### Low energy contacts – gold plated

Range	Rating
Maximum	NEMA A600 & NEMA Q600 5VAC/DC, 2mA; 12VAC/DC, 1mA; 24VAC/DC, 5mA
Minimum	

8

### Lamp bulbs connected in common

If several lamps are to be connected to a common lamp-test pushbutton, a separate diode must be connected in series with each respective lamp. A special block with a built-in diode (CBK-CBD) is available for this purpose and can be securely snapped onto the lamp block or placed at the side.

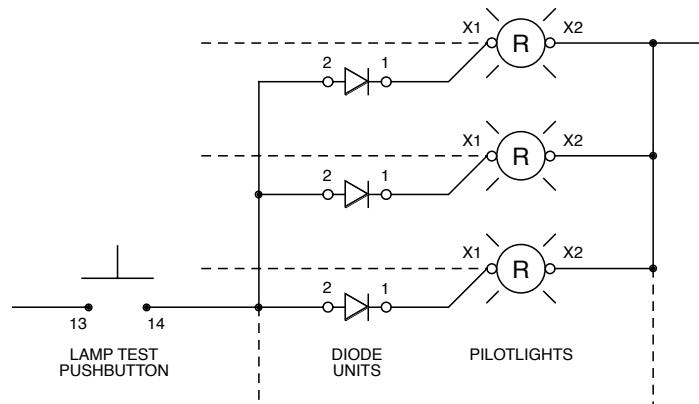

WHEN SEVERAL PILOT LIGHTS ARE CONNECTED TO A COMMON LAMP TEST BUTTON, CONNECT A DIODE TO EACH PUSHBUTTON AS SHOWN.  
A SPECIAL DIODE BLOCK IS AVAILABLE FOR THIS PURPOSE.

Spec Tech Industrial 203 Vest Ave. Valley Park, MO 63088 Phone: 888 SPECTECH  
Fax: 636 537-1405 [www.spectechind.com](http://www.spectechind.com)

## Mechanical life

### Operators

Pushbuttons with flush or extended button, momentary mushroom pushbutton	2 million operations
Selector switch, maintained mushroom push-button, key operated selector switch and double pushbutton	0.5 million operations
Toggle switch	1 million operations
Lockable pushbuttons	0.3 million operations

### Temperature

Ambient temperature during operation	-25 to +70°C
Exception: All pilot devices with 2 W continuously lit filament bulb	-25 to +40°C
Storage temperature	-30 to +85°C

### Terminals

Plus-minus pozidrive size 2 screw with DIN-washer.	min. 1 x 0.5mm <sup>2</sup>
Connectable area max. 2 x 2.5mm <sup>2</sup>	0.9 Nm

## 8 Contact blocks

Mechanical endurance	10 million operations
Self cleaning contacts of silver, N.C. contact has forced breaking.	
At voltages and currents below 24 V and 5.6 mA two contact blocks in parallel are recommended. As an alternative, gold plated contacts are recommended.	

Ratings as per UL/CSA, NEMA A600, Q600

Rated insulation voltage	600V
Rated thermal current	10A
Rated operational current at:	
240V	120V     6A
480V	3A
600V	1.5A
	1.2A

Ratings as per UL/CSA, NEMA Q600

Rated thermal current	2.5A
Rated operational current, I <sub>e</sub>	
125V	.55A
250V	.27A
301 - 600V	.10A
Max make or break V/A 300V or less	69

Ratings as per IEC 947-5-1

Rated insulation voltage, U <sub>i</sub>	690V
Rated thermal current, I <sub>th</sub>	10A
Rated operational current, I <sub>e</sub>	
125V	120V     8A
230V	6A
400V	4A
690V	2A
Rated operational current, I <sub>e</sub>	
125V	24V     5A
250V	1.1A
Utilization category DC 13, at	
125V	0.55A

Contact resistance

Max. number of contact blocks per operator <sup>①</sup>	.025 ohms
Pushbutton, toggle switch	6
Mushroom pushbutton	5
Double pushbutton, selector switch, key operated selector switch and emergency stop pushbuttons	4

Short circuit protection

Max. fuse at 1 kA	16 A ordinary
	10 A delayed

## Lamp block

Ratings as per IEC 947-5-1


Rated insulation voltage	230V
Base	BA 9s
Max. permissible power	2W

### Service life of filament bulb

Relative service life, luminous flux and power consumption at different service voltages.

It is generally true to say that bulbs for lower voltages give more light and have better vibration-withstand capability than bulbs for higher voltages.

## Service life

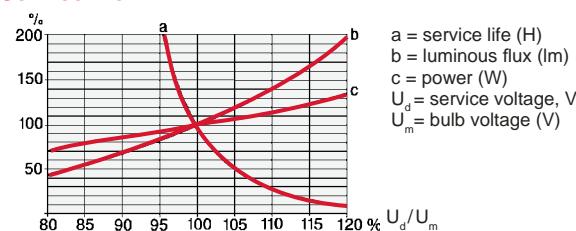

## Lamp comparison

Bulb type	Approx. service life (hours)	Shock and vibration immunity	High operating temperature	Low power consumption	Brightness
Filament	5000–10,000	+	+	+	+++
Neon	20,000	++	+++	+++	+
LED	25,000–50,000	+++	++	++	++
Very good	+++				
Good	++				
Less good	+				

## Transformer block

Suitable for bulb 6 or 24V and 1.2W and LED 24V.

Rated power	1.5 W
Rated voltage	Ratio, see page 2.21
Rated insulation voltage acc. to IEC	
70°C (ΔT)	Class E

## Bulbs

Voltage	Rated current, mA	Rated output, W
<b>Filament type</b>		
6VAC/DC	200	1.2
12VAC/DC	100	1.2
24VAC/DC	50	1.2
30VAC/DC	40	1.2
48VAC/DC	42	2
60VAC/DC	20	1.2
130VAC/DC	15	2
<b>Neon type</b>		
110VAC/DC	0.8	0.10
220VAC	1.9	0.40
220VDC	0.9	0.20
<b>LED type</b>		
24VAC/DC	20	.48
120VAC	5	.6
240VAC	4	.92
<b>Flashing LED type</b>		
24VDC	25	.60


<sup>①</sup> Contact blocks can be stacked maximum two deep.

## Approximate dimensions


Pilot Devices  
Type CBG 30mm

00.00 Inches  
00.00 [Millimeters]


**Pushbutton and illuminated pushbutton**

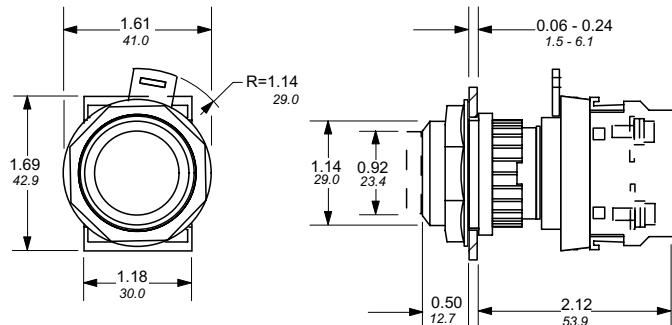


**Mushroom pushbutton — 40mm (Momentary)**

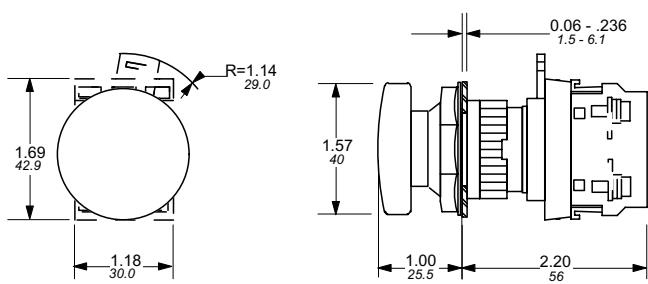


**Illuminated pushbutton with transformer**

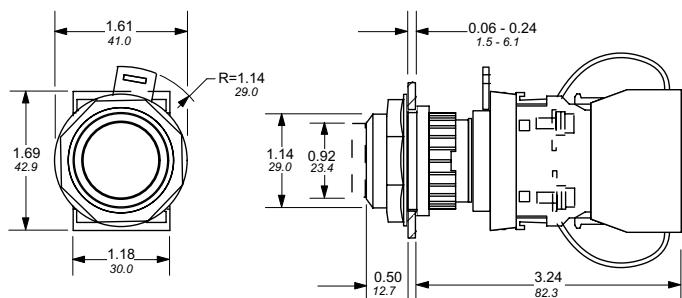


**Mushroom pushbutton — 60mm**

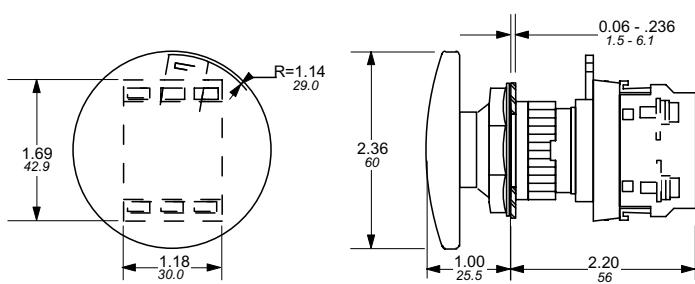


**Mushroom pushbutton — 30mm**

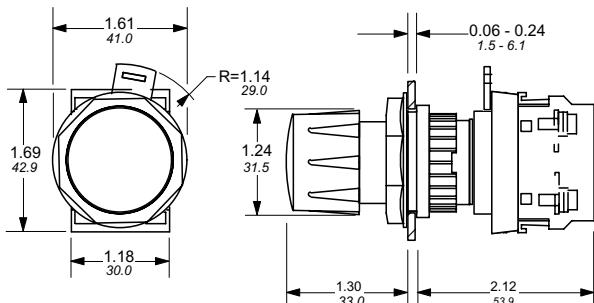


**Mushroom pushbutton — 40mm lockable**

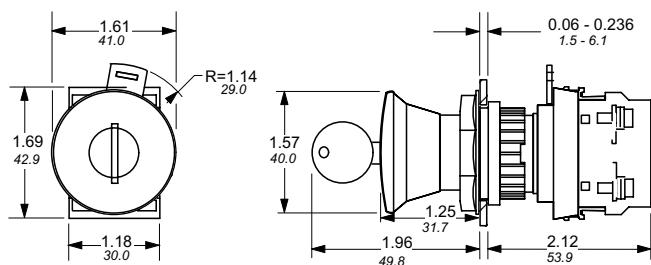

**Mushroom pushbutton — 40mm (Push-pull & twist release)**

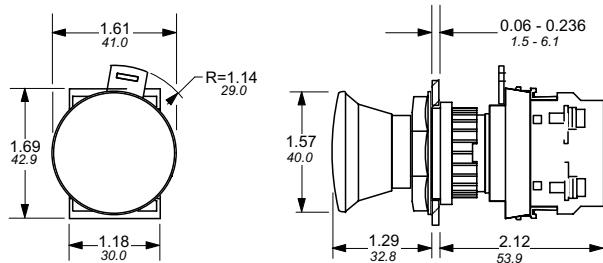


**Toggle switch**

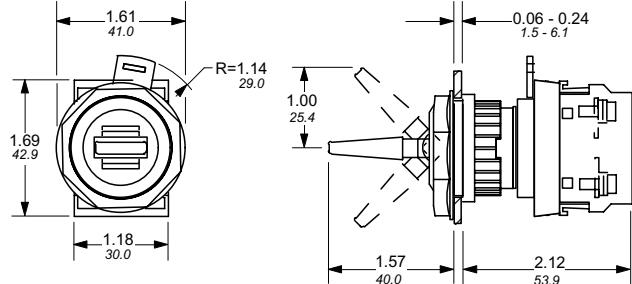


## Approximate dimensions

0.00 0.00 Inches  
[Millimeters]


### Key operated pushbutton

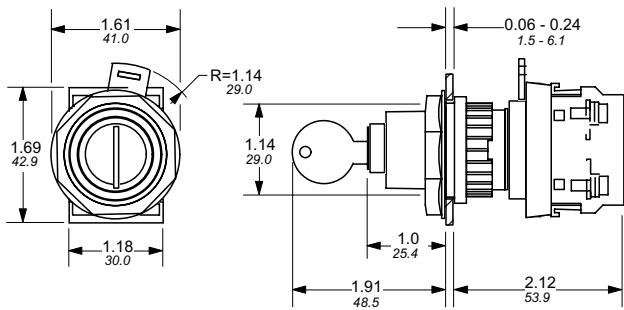


### Pilot light

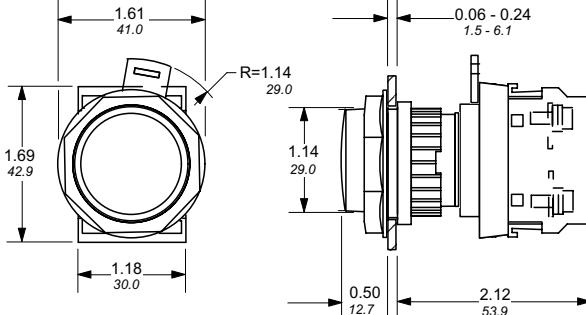


### Selector switch — knob handle

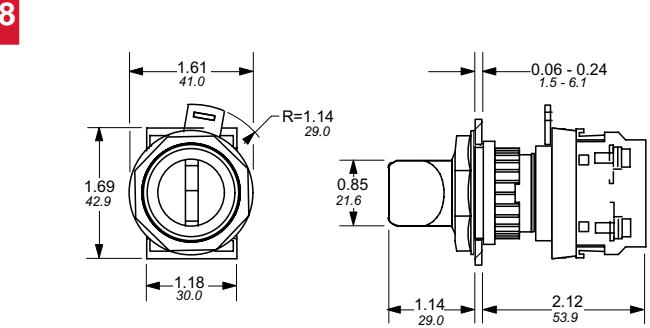


### Pilot light with transformer

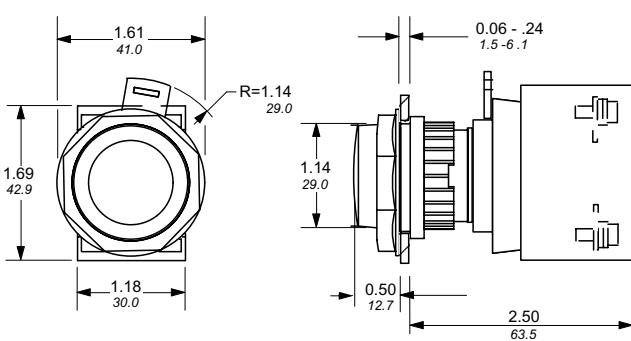


### Selector switch — lever handle

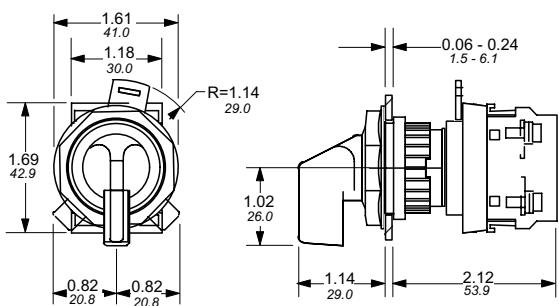


### Reset actuator

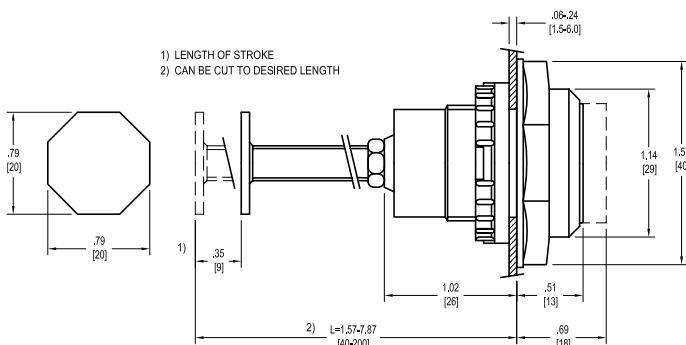

### Selector switch — key operated

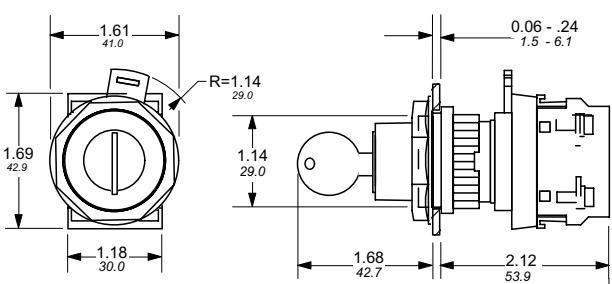

### Transformer block


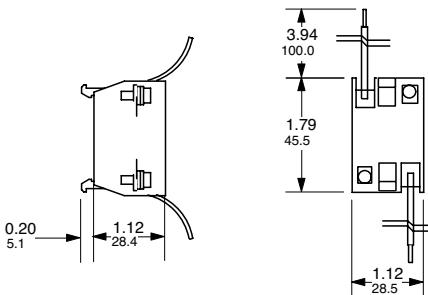


## Approximate dimensions Drilling plans


Pilot Devices  
Type CBG 30mm

00.00      Inches  
00.00      [Millimeters]


**Potentiometer – NEMA 1 with terminal block**

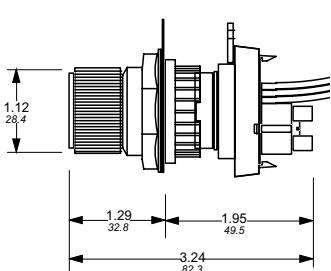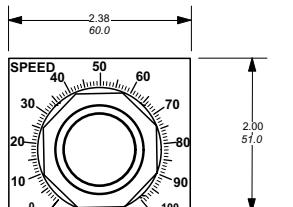


**Potentiometer – NEMA 4X without terminal block**



BOTTOM VIEW



SIDE VIEW



TOP VIEW

### Drilling plans

8

