


Bolted Flange Fitting




Available in 1", 1- 1/2", 2", 3", 4" and 6" I.D.

**Material:**

Outside Flange: PVC, CPVC  
 Gaskets: EPDM or Viton®  
 Bolts: 316SS, Titanium, C-276, or Alloy 400

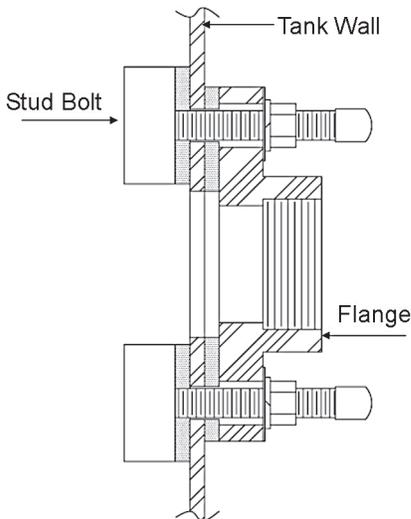


Bolted Flange Bulkhead Fitting

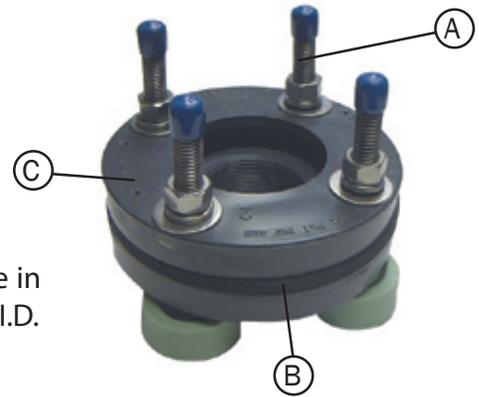

Available in 2" and 3" I.D.

**Material:**

Body: PVC, CPVC  
 Gaskets: EPDM or Viton®  
 Bolts: 316SS, Titanium or C-276 for OR-1000™ Lined Systems

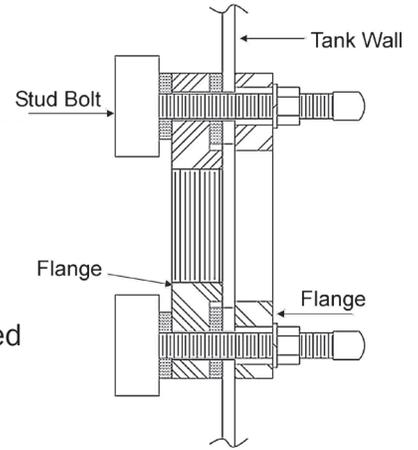

Eccentric Reducer



**Material:**

PVC, CPVC

Complete Drain for IMFO® Service

“Self Aligning” and “Thru-Dome” Fittings



**BHF Style  
“Self-Aligning”  
Dome**

Available in 1/2", 3/4", 1",  
\*1-1/2", \*2", \*3"



**Flange Style  
“Self-Aligning”  
Dome**

Available in 1-1/2", 2", 3", and 4"



Shown with  
optional  
Flange Adapter


“Thru-Dome” Available in 6"

\*Sizes in PVC only

Material: (for all types shown) PVC, CPVC

Gaskets: EPDM & Viton®

Stainless Steel Fittings

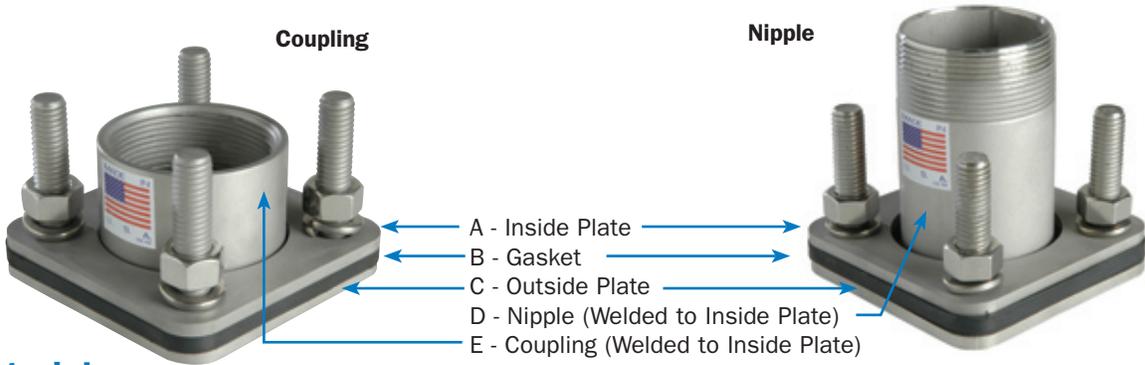

**Material:**

**Body:** 316SS - Standard

**Gaskets:** EPDM or Viton®

All available with flange adapters

Available in 1/2", 3/4", 1",  
1-1/2", 2", 3", and 4"

page  
18

Accessories



Flange Adapter



Bolted Spool Fitting



Siphon Leg



Bolted Lids



Combination Lids



Threaded Lids

Other Accessories Available

**Bolt-on Side Manways**

**Ladders:** OSHA approved  
FRP  
Mild Steel  
(Cages & Returns Available)

**Restraint Systems: Seismic-Rated  
and Wind-Rated as well as Non-Rated  
Lateral Restraint Available. Contact  
Customer Support for Information.**

**SAFE-TANK® Fittings & Accessories**  
(see page 9)

Vents



Mushroom



U-Vent

**Protect Your Warranty!**  
See Venting Requirements  
on page 2.

Vent Size	Base Fitting Requirements
2" Mushroom (PPL)	None
3" Mushroom (PPL)	None
2" U-Vent	None
3" U-Vent	Yes
4" U-Vent	Yes
6" U-Vent	Yes

**CAUTION:** For Hydrochloric Acid service, see special requirements on page 8


**Material for U-Vents:**

PVC, CPVC or PP

Optional screened openings available


Note: Screened vent size must exceed size of tank's largest fitting by two inches.

Liquid Level Gauges

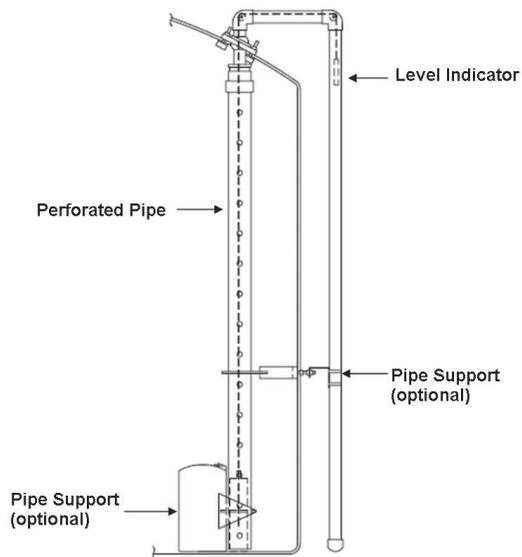


Reverse Float Type

Top Fill / Top Discharge Assemblies

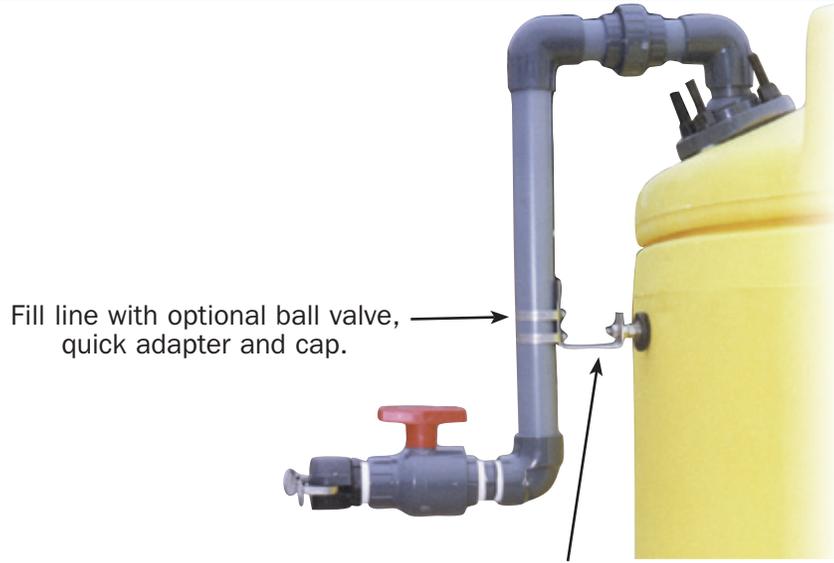


(1) **Support** required for every 6' of pipe.


page  
20

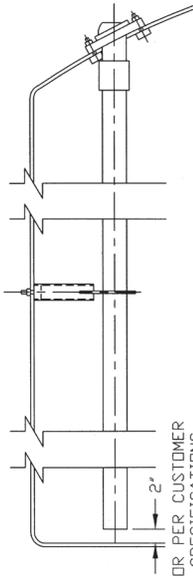

INTERIOR DROP PIPE

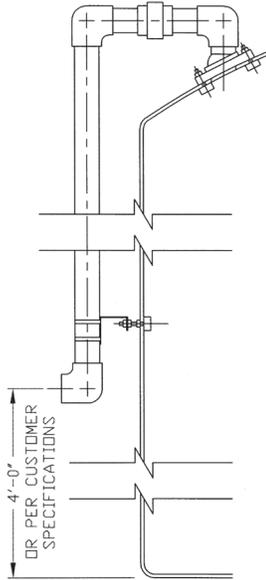

EXTERIOR DROP PIPE

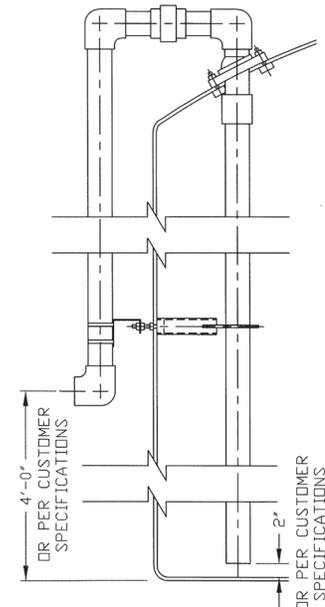

COMBINATION DROP PIPE

**Specifications:**

**Pipe Size:** 1" - 3"

**Pipe Support: One required every 6 ft.**

**Material:**

Pipe: PVC, CPVC or PP

Gaskets: EPDM

Dome Fittings: PVC, PP or CPVC

Bolts: 316SS, C-276, Titanium or Alloy 400

Hose Clamp: Stainless Steel