


Poly Processing has the capabilities to electrically heat trace tanks to ensure that the contents are maintained at a specified temperature. Insulated tanks also offer 100% UV protection in outdoor installations.

The Tank Heating System is determined by the size of tank, desired temperature maintenance, and environmental conditions. Heating systems are available with a delta-T of 30, 60, and 100°F. Delta-T is the difference between the product temperature and the minimum ambient temperature.

Poly Processing uses SILCOPAD Tank Heating Systems that are specifically designed for temperature maintenance on polyethylene tanks. These tank heating systems maintain the desired product temperature, **not to exceed 100°F**. Each heating system consists of tank heating pads and temperature controllers. Tanks are then insulated with a two inch thick layer of foamed polyurethane insulation covered with two coats of mastic.

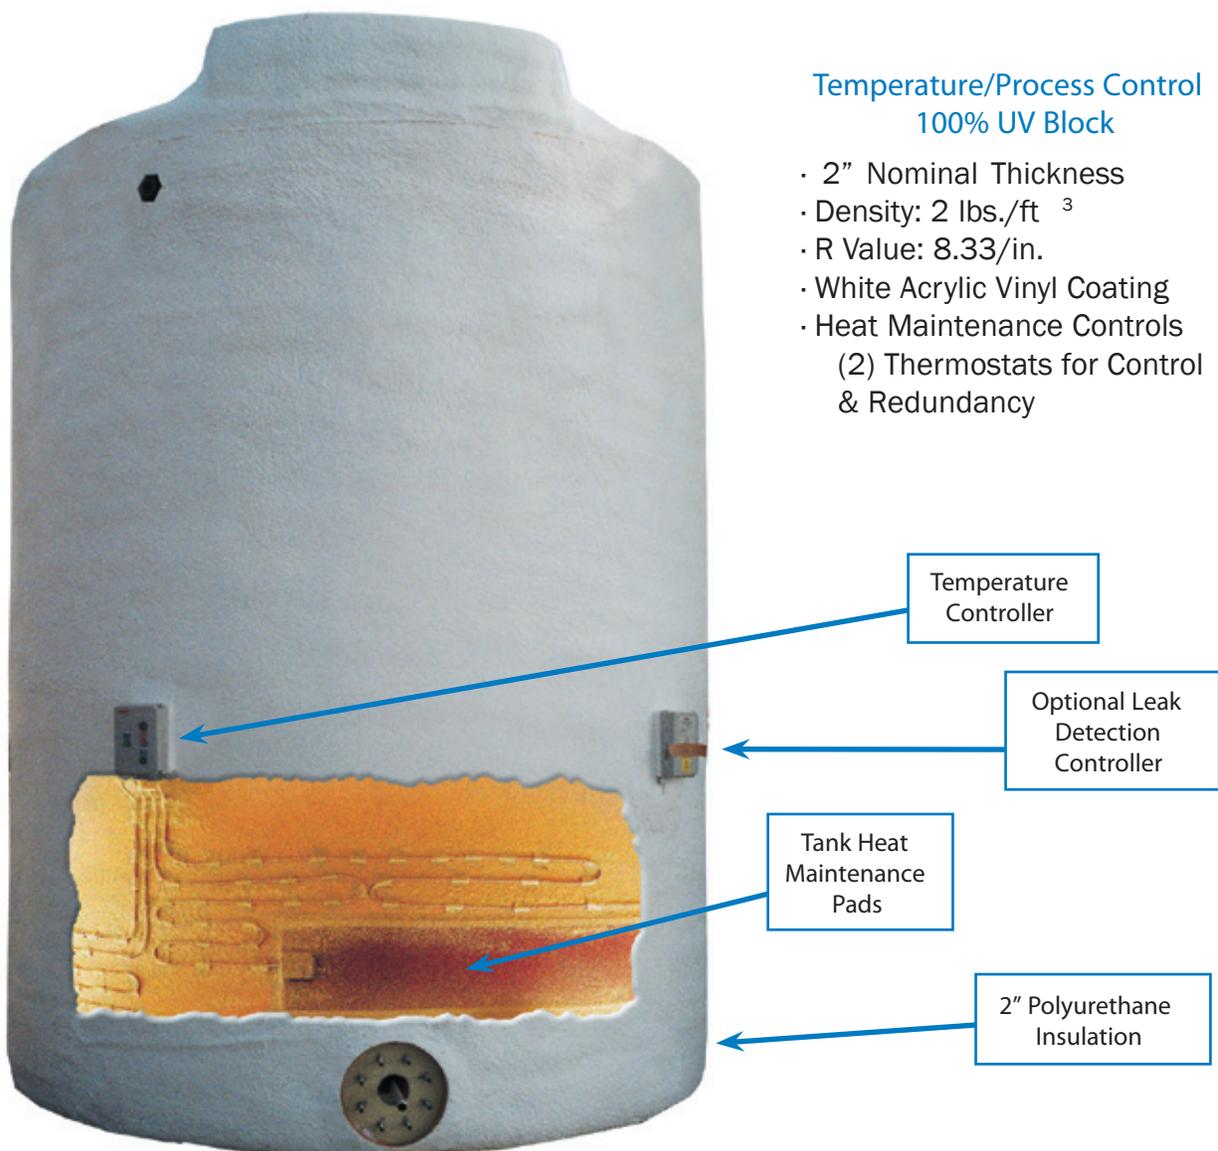

Insulated SAFE-TANK® shown above